

FLUA®



BERT RS DO



A series of slim rings floating through space, with its retro-look appearance is the best choice for many applications. 3 diameters are available for choice. This circle of leds is specially designed to guarantee a uniform and perfectly balanced light output, resulting in a very enjoyable diffuse lighting effect

Designer	ZCJ
Sales status	On Sale
Product classification	Interior
Model	324714AP2

WWW.FLUA.COM

Installation information

Area	Celing
Method	Suspended
Cut hole size	/
Embedded height	/

Technical general

System power	48W
Flux	2640lm
Beam angle	L
Material	Aluminum
Appearance color	PAB
Size	Φ 730*18mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	100-240VAC 50/60Hz
Electrical level	Class I

Electrical parameters

Driver brand	MEAN WELL
Driver type	LRS-50-24
Electrical installation	Build in
Dimming mode	DIM COLOR by Tuya

Light source parameters

Brand	HONGLI
Type	2835
Power	42W
Light color	CW-NW-WW
Color temperature	2700-6000K
CRI	80


Other options

Beam angle	/
Color temperature	/
Color	/
Appearance color	/

3D module



Line drawing

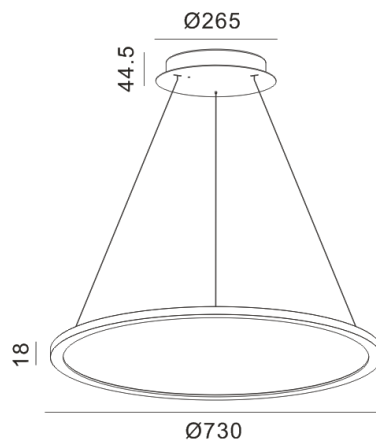

Unit: mm

FLUA®

Instructions

Accessory Set

x4 x4

2.0MM

1 Disassemble

Twist screw, rotate out

2 hole pattern

x4 Cable Enter

3

x4

4

5 Adjustable

6

Please use dry non-woven fabric to clean the light guide.
Can not touch water

7

8

The instructions are presented in a grid of 8 numbered panels. Panel 1 shows the disassembly of the top cover using a 2.0mm screwdriver. Panel 2 shows the drilling of a hole pattern for cable entry. Panel 3 shows the top cover being screwed back on. Panel 4 shows the light guide being connected to the fixture. Panel 5 shows the light guide being adjusted. Panel 6 shows the light guide being cleaned with dry non-woven fabric. Panel 7 shows the mobile app interface for connecting the device. Panel 8 shows the final assembled light fixture.