



# ICE75 RGB 三模键盘用户手册

ICE75 RGB Multi-modes Mechanical Keyboard

User Manual

快速开始指南 ▶


Quick Start Guide

# 感谢您购买及使用本产品



为了给您带来更好的使用体验，在使用产品前请仔细阅读本说明书，并请妥善保管，以便日后参观。

## 包装内容

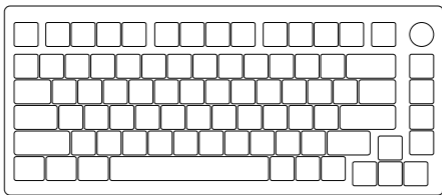

## 系统需求

Windows®XP / Vista / 7 / 8 / 10或更高版本


## 安装步骤

将键盘USB连接线插入电脑的USB接口即可开始使用。

## 独立指示灯

状态	指示灯位置	回连	配对	连接成功
BT1	按键E灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT2	按键R灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT3	按键T灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
2.4G	按键Y灯	绿灯慢闪	绿灯快闪	绿灯常亮2s熄灭
有线	按键U灯	无	无	红灯常亮2s熄灭
状态	指示灯位置	指示方式		
低电	空格键灯	红灯慢闪		
充电		绿灯常亮		
充满		灯灭		
Caps	Caps键灯	白灯常亮		
锁Win	左Win键灯	白灯常亮		

## ICE75 组合键功能


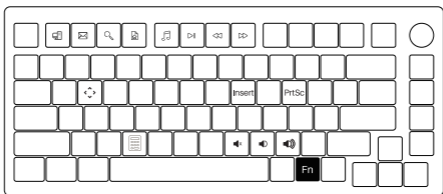


Fn+	F1	我的电脑
	F2	电子邮件
	F3	= Windows搜索
	F4	浏览器主页
	F5	多媒体播放器

Fn+	F6	播放 / 暂停
	F7	上一首
	F8	= 下一首
	C	计算器
	M	静音

Fn+	<	= 音量减小
	>	= 音量增加
	I	= INS
	P	PrtSC
	W	将 WASD 与 ↑ ↓ ← → 键对调

## ICE75 系统功能 (Windows)

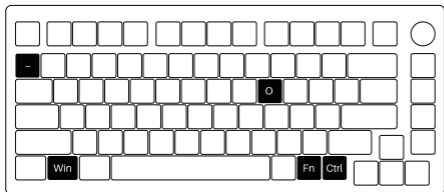

旋钮功能

锁Win键

Fn + 左Win

恢复出厂设置

长按 Fn + ~键 5秒


切换成菜单键

长按Fn + 右Ctrl 3秒

Win系统 ⇄ Mac系统


长按 Fn + O 3秒

## ICE75 系统功能 (Mac)

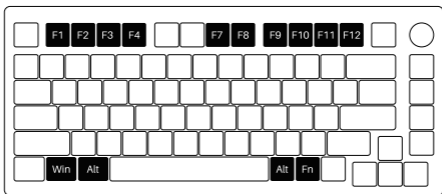

F1	降低显示屏亮度	F7	上一曲	F11	调低音量
F2	增加显示屏亮度	F8	播放/暂停	F12	调高音量
F3	开放任务控制	F9	下一曲	左Win	Option
F4	呼出Siri	F10	静音	左Alt	Command
右Alt	Command	Fn + (F1~12)	F1 ~ F12		


## ICE75 灯光调节

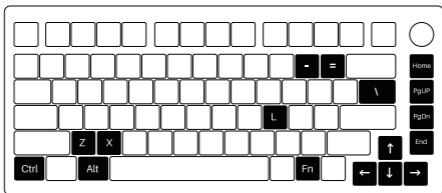

Fn++	灯光速度变慢	Fn+Home	常亮（默认）、涟漪、如影随形、川流不息、流星
Fn+=	灯光速度变快	Fn+PgUp	繁星点点、霓虹、光波、层出不穷、彩泉涌动
Fn+↑	灯光变亮	Fn+End	呼吸、极光、正弦波、雨滴、峰回路转
Fn+↓	灯光变暗	Fn+PgDn	斜风细雨、踏雪无痕、聚合、一石二鸟、百花争艳
Fn+←	灯光方向向左	Fn+\	切换背光致7种单色+RGB循环
Fn+→	灯光方向向右	Fn+左Ctrl	侧边灯光模式切换，包括关闭 共6种
Fn+L	灯光关闭/开启	Fn+左Alt	在侧边灯光模式，调节灯光颜色致7色单色+RGB循环
Fn+Z	侧边灯光亮度切换，5档，循环	Fn+X	侧边灯光速度切换，5档，循环



# ICE75 连接使用指南

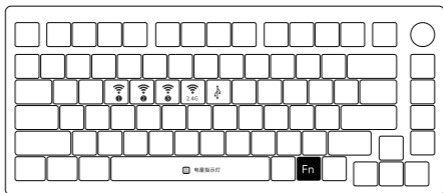

Fn+	E	=	蓝牙设备1
	R		蓝牙设备2
	T		蓝牙设备3
	Y		2.4G无线设备
	U		有线模式

## 蓝牙配对

键盘开机后,按下Fn+E/R/T进入蓝牙模式,长按Fn+E/R/T组合键3S,键盘进入对码状态,蓝色指示灯快闪,连上后指示灯常亮2S,如果没有连上设备指示灯熄灭,键盘进入睡眠。

## 2.4G配对

键盘开机后,按下Fn+Y进入2.4G模式,再按下Fn+Y组合键3S进入配对模式后,插入接收器,绿色指示灯快闪,配对成功后退出对码,模式灯常亮2S,找不到配对设备30s后,退出对码模式灯熄灭,键盘进入睡眠。

## 电量查询

在无线模式下,按Fn+空格组合键可检查电池电量。如果电池电量低于30%,数字1-2键将显示红灯。如果电池电量低于100%,数字1-9键将显示绿灯,电池电量充满数字1-0键显示绿灯。

1	2	3	4	5	6	7	8	9	0
低于30%	低于40%	低于50%	低于60%	低于70%	低于80%	低于90%	低于100%	充满	

亮红灯

亮绿灯

## 按键/灯光自定义说明和调用说明

1. 键盘按键/灯光自定义可配合驱动进行
2. 键盘灯光可搭配驱动实现音乐律动
3. 请在我司官网下载“MonsGeek\_setup”驱动
4. 驱动下载地址[www.monsgeek.cn](http://www.monsgeek.cn)

## MONGEEK保修和服务声明

1. MONGEEK为中国大陆的客户提供一个保修。对于其他地区，请联系您的卖家（MonsGeek分销商）以了解具体的保修政策。
2. 如果保修期到期，客户需要支付维修费用。如果用户喜欢自己修理键盘，MonsGeek也会提供说明。用户应对自行修复过程中发生的任何损失承担全部责任。
3. 由于私自拆卸产品、使用不当和安装不当而导致的缺陷不在保修范围内。
4. 官方售后服务时间为每周一至周五上午10:00至下午18:00，节假日以国家法定节日休息为准。
5. 退货和保修政策在不同的平台上可能有所不同，并在购买时取决于具体的经销商。

公司：深圳银宸科技有限公司

地址：深圳市宝安区松岗街道碧头第一工业区朗碧路33号

电话：0755-23216420

网址：[www.monsgeek.cn](http://www.monsgeek.cn)

产地：中国·深圳

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou First Industrial Zone, Bao'an District, Shenzhen, China



WARNING:  
Water and Beverages can't be  
poured into the Keyboard.




中国制造/Made in China

注意  
事项

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等，键盘为电子产品，请按照电子产品保护方式爱惜使用。

To provide you with a better user experience, please read this manual carefully before using the product.

## Packing List

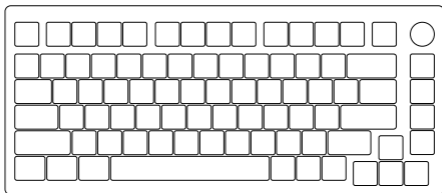

## System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version


## USB Connection

Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

## ICE75 LED Indicator List

Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
2,4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired mode	LED for Key U	N/A	N/A	Red light stays on for 2 seconds and then turns off
Status	Indicator	Indicating mode		
Low Battery	Independent LED Indicator (near spacebar)	Red light blinks slowly		
Charging		Steady green		
Fully Charged		Light off		
Caps	LED for Caps Key	Steady white		
Lock Win	LED for left Win Key	Steady white		

## ICE75 HotKeys


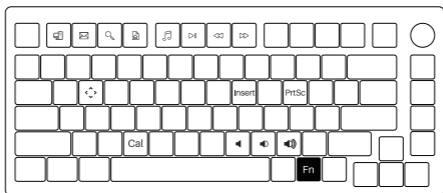


Fn+	F1	=	My Computer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Multimedia Player

Fn+	F6	=	Play/Pause
	F7		Previous Song
	F8		Next Song
	C		Calculator
	M		Mute

Fn+	I	=	Insert
	P		Print SCR
	<		Decrease Volume
	>		Increase Volume
	W		Swap WASD with ↑ ↓ ← →

## ICE75 System Commands (Windows)

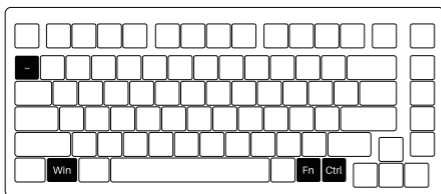

### Lock Win key

Press Fn and left Win key

### Restore Factory Settings

Hold down Fn and press ~ Key for 5s


### Revert Ctrl into Menu Key

Hold down Fn and press right Ctrl key for 3s

### Win System ⇄ Mac System


Hold down Fn and press O key for 3s

## ICE75 System Commands (Mac)

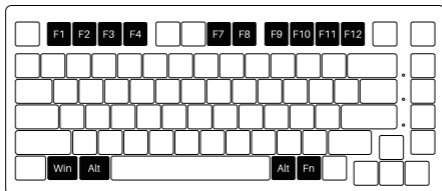


F1	Decrease display brightness	F7	Skip back (Audio)	F11	Volume down
F2	Increase display brightness	F8	Pause/Play (Audio)	F12	Volume up
F3	Open mission control	F9	Skip forward (Audio)	Left Win	Option
F4	Activate Siri	F10	Mute	Left Alt	Command
Right Alt	Command	Fn + (F1~12)		F1 ~ F12	

## ICE75 Backlight Settings

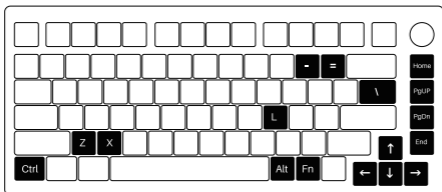

Fn++	Slower Animation	Fn+Home	Effect 1、Effect 2、Effect 3、Effect 4、Effect 5
Fn+=	Faster Animation	Fn+PgUp	Effect 6、Effect 7、Effect 8、Effect 9、Effect 10
Fn+↑	Bright	Fn+End	Effect 11、Effect 12、Effect 13、Effect 14、Effect 15
Fn+↓	Dim	Fn+PgDn	Effect 16、Effect 17、Effect 18、Effect 19、Effect 20
Fn+←	Set animation direction to left	Fn+\	This shortcut allows you to set the backlight color to 7 single color with RGB loop effect
Fn+→	Set animation direction to right	Fn+Left Ctrl	Side light modes cyclically adjustable in 6 levels (including OFF option)
Fn+L	Light Off/On	Fn+Left Alt	In side light mode, adjust the light color to 7 single colors + RGB cycle
Fn+Z	Side light brightness cyclically adjustable in 5 levels	Fn+X	Side light animation speed cyclically adjustable in 5 levels

# ICE75 Wireless/Wired Connection Guide

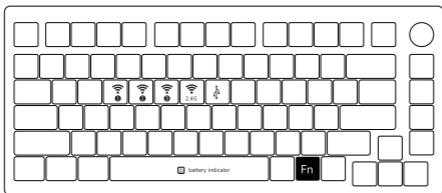

Fn+	E	=	Bluetooth Device 1
	R		Bluetooth Device 2
	T		Bluetooth Device 3
	Y		2.4G Wireless Device
	U		Wired Mode

## Bluetooth Pairing

After turning on the keyboard, press Fn+E/R/T to enter Bluetooth mode. Press and hold the Fn+E/R/T combination key for 3 seconds to put the keyboard in pairing mode, with the blue indicator light flashing quickly. After connecting, the indicator light remains on for 2 seconds. If no available device is connected, the LED indicator will turn off and the keyboard will enter sleep mode.

## 2.4G Pairing

After turning on the keyboard, press Fn+Y to enter 2.4G mode. Then press and hold the Fn+Y combination key for 3 seconds to enter pairing mode. Then insert the receiver, and the green indicator light will flash quickly. Once pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

## Battery Level Check

Press the Fn + Space combination keys to check the battery level in wireless mode. If the battery level is below 30%, the LED for number keys 1-2 will show a red light. If it's between 30-100%, the LED for number keys 1-9 will show a green light. And when the battery is fully charged, the LED for number keys 1-0 will show a green light.

1	2	3	4	5	6	7	8	9	0
Less than 30%	Less than 40%	Less than 50%	Less than 60%	Less than 70%	Less than 80%	Less than 90%	Less than 100%	Full charged	

Red light

Green light

## Key/Lighting Effects Customization Instruction

1. The key/lighting effects customization can be programmed with MonsGeek Driver
2. The lighting effects can also achieve music rhythm effects with MonsGeek driver
3. Please visit [monsgeek.com/download/](https://www.monsgeek.com/download/) to download the driver

## MONSGEEK Warranty and Service Statement

1. MONSGEEK offers a One-Year warranty for customers in mainland China.  
For other regions, please contact your seller (MonsGeek distributor) for specific warranty details.
2. If the warranty period expires, customers are responsible for repair costs.  
MONSGEEK provides instructions for self-repair if preferred, but users assume full responsibility for any losses incurred during the process.
3. Defects resulting from disassembly of our product, improper usage and incorrect installation are not covered by warranty.
4. Return and warranty policies may vary across platforms and are subject to the specific distributor's terms at the time of purchase.

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: [www.monsgeek.com](http://www.monsgeek.com)

Origin: Shenzhen, China



**WARNING:**

Water and Beverages can't be poured into the Keyboard.



中国制造/Made in China

### Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.

The logo for MonsGeek features a stylized white 'M' icon on the left, composed of geometric shapes. To its right, the word 'MONSGEEK' is written in a bold, white, sans-serif font. The background is black with a repeating watermark of the text 'MONSGEEK' in a lighter gray color.

**MONSGEEK**