



M3W RGB 三模键盘用户手册

User Manual

快速开始指南 ▶


Quick Start Guide

感谢您购买及使用本产品



为了给您带来更好的使用体验，在使用产品前请仔细阅读本说明书，并请妥善保管，以便日后参观。

包装内容

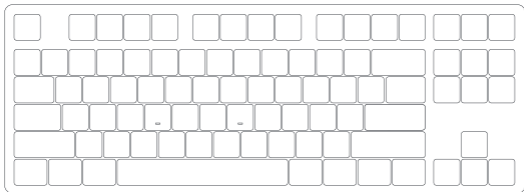

系统需求

Windows®XP / Vista / 7 / 8 / 10或更高版本

安装步骤


将键盘USB连接线插入电脑的USB接口即可开始使用。

独立指示灯

状态	指示灯位置	回连	配对	连接成功
BT1	按键E灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT2	按键R灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
BT3	按键T灯	蓝灯慢闪	蓝灯快闪	蓝灯常亮2s熄灭
2.4G	按键Y灯	绿灯慢闪	绿灯快闪	绿灯常亮2s熄灭
有线	按键U灯	无	无	红灯常亮2s熄灭

状态	指示灯位置	指示方式
低电	独立指示灯2	白灯慢闪
充电		白灯常亮
充满		灯灭
Caps	独立指示灯1	白灯常亮
锁Win	独立指示灯3	白灯常亮

M3W RGB 组合键功能

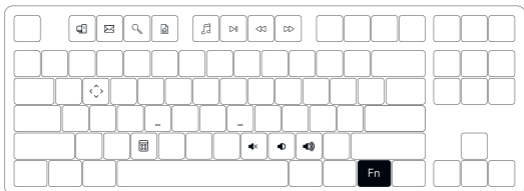


Fn+	F1	我的电脑
	F2	电子邮件
	F3 =	Windows搜索
	F4	浏览器主页
	F5	多媒体播放器

Fn+	F6	播放 / 暂停
	F7	上一首
	F8 =	下一首
	C	计算器
	M	静音

Fn+	<	音量减小
	>	音量增加
	W =	将WASD与 ↑↓←→键对调

M3W RGB 系统功能 (Windows)

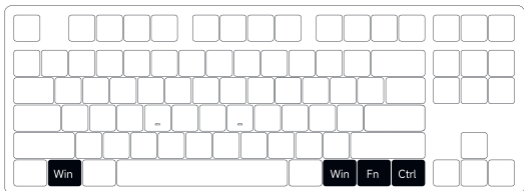

锁Win键

Fn + 左Win


恢复出厂设置

长按 左Win + 右Win 5秒

切换成菜单键


长按Fn + 右Ctrl 3秒

M3W RGB 系统功能 (Mac)

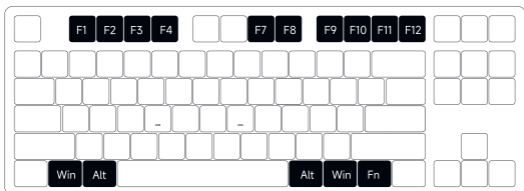


F1	降低显示屏亮度	F7	上一曲	F11	调低音量
F2	增加显示屏亮度	F8	播放/暂停	F12	调高音量
F3	开放任务控制	F9	下一曲	左Win	Option
F4	呼出Siri	F10	静音	左Alt	Command
右Alt	Command	Fn + (F1-12)		F1 ~ F12	
右Win	Option				

M3W RGB 灯光调节

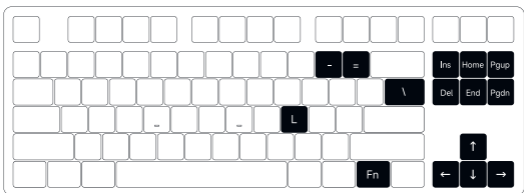

Fn+-	灯光速度变慢	Fn+Ins	常亮(默认)、流星、呼吸
Fn+=	灯光速度变快	Fn+Home	涟漪、如影随形、川流不息
Fn+L	灯光关闭/开启	Fn+Pgup	繁星点点、霓虹、光波、层出不穷
Fn+↑	灯光变亮	Fn+Del	彩泉涌动、峰回路转、百花争艳
Fn+↓	灯光变暗	Fn+End	极光、正弦波、雨滴
Fn+←	灯光方向向左	Fn+Pgdn	斜风细雨、踏雪无痕、聚合、一石二鸟
Fn+→	灯光方向向右	Fn+\	在所有灯效RGB彩光模式下， 调节灯光颜色致7色单色+RGB循环

M3W 三模RGB 连接使用指南

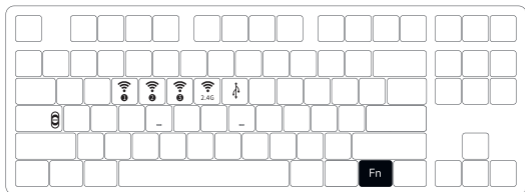

Fn+	E	蓝牙设备1	
	R	蓝牙设备2	
	T	蓝牙设备3	
	Y	2.4G无线设备	
	U	有线模式	
			开关示意图
			上: Mac (内置电源开)
			中: Windows (内置电源关)
			下: Windows (内置电源开)

蓝牙配对

键盘开机后，按下FN+E/R/T进入蓝牙模式，长按FN+E/R/T组合键3S，键盘进入对码状态，蓝色指示灯快闪，连上后指示灯常亮2S，如果没有连上设备指示灯熄灭，键盘进入睡眠。

2.4G配对

键盘开机后，按下FN+Y进入2.4G模式，再按下FN+Y组合键3S进入配对模式后，插入接收器，指示灯快闪，配对成功后退出对码模式灯常亮2S，找不到配对设备30s后，退出对码模式灯熄灭，键盘进入睡眠。

电量查询

在无线模式下，按Fn+空格组合键可检查电池电量。如果电池电量低于30%，数字1-2键将显示红灯。

如果电池电量低于100%，数字1-9键将显示绿灯，电池电量充满则数字1-0键显示绿灯。

1	2	3	4	5	6	7	8	9	0
低于30%	低于40%	低于50%	低于60%	低于70%	低于80%	低于90%	低于100%	充满	

亮红灯

亮绿灯

按键/灯光自定义说明和调用说明

1. 键盘三种工作模式下均可连接驱动并进行灯光和按键自定义
2. 键盘三种工作模式下可搭配驱动实现音乐律动
3. 请在我司官网下载“MonsGeek_setup”驱动
4. 驱动下载地址www.monsgeek.cn

MONSGEEK保修和服务声明

1. MONSGEEK为中国大陆的客户提供一年保修。对于其他地区，请联系您的卖家（MonsGeek分销商）以了解具体的保修政策。
2. 如果保修期到期，客户需要支付维修费用。如果用户喜欢自己修理键盘，MonsGeek也会提供说明。用户应对自行修复过程中发生的任何损失承担全部责任。
3. 在未经制造商/卖方指示的情况下拆开键盘将立即导致保修无效
4. 官方售后服务时间为每周一至周五上午10:00至下午18:00，节假日以国家法定节日休息为准。
5. 退货和保修政策在不同的平台上可能有所不同，并在购买时取决于具体的经销商。

公司：深圳银宸科技有限公司

地址：深圳市宝安区松岗街道碧头第一工业区朗碧路33号

电话：0755-23216420

网址：www.monsgeek.cn

产地：中国·深圳

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou First Industrial Zone, Bao'an District, Shenzhen, China



WARNING:
Water and Beverages can't be
poured into the Keyboard.





中国制造/Made in China

注意
事项

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等，键盘为电子产品，请按照电子产品保护方式爱惜使用。

To provide you with a better user experience, please read this manual carefully before using the product.

Packing List

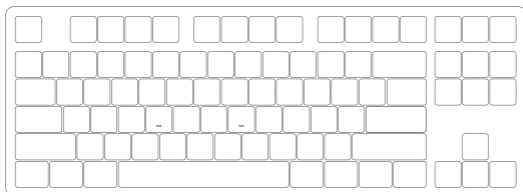

System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version

Connectivity Method


Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

LED Indicators

Status	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
Bluetooth device 3	LED for Key T	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then turns off
2,4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then turns off
Wired mode	LED for Key U	N/A	N/A	Red light stays on for 2 seconds and then turns off


Status	Indicator	Indicating Mode
Low Battery	Right LED for Key Spacebar	White light blinks slowly
Charging		Steady white
Fully Charged		LED off
Caps	LED for Key Caps	Steady white
Lock Win	LED for Key Win	Steady white

M3W RGB HotKeys

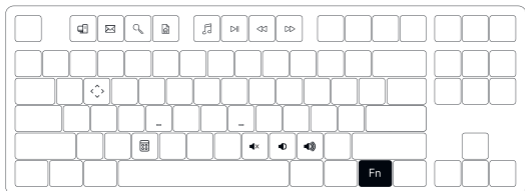

Fn+	F1	=	My Computer	Fn+	F6	=	Play/Pause	Fn+	<	=	Decrease Volume
	F2	=	E-mail		F7	=	Previous Song		>	=	Increase Volume
	F3	=	Windows Search		F8	=	Next Song		W	=	Swap W A S D with ↑ ↓ ← →
	F4	=	Browser Homepage		C	=	Calculator				
	F5	=	Multimedia Player		M	=	Mute				

M3W RGB System Commands (Windows)

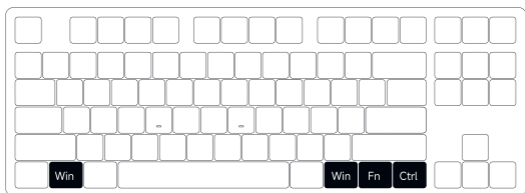

Lock Win Key

Press Fn
and left Win key


Restore Factory Settings

Hold down left Win
and right Win key for 5s

Evert Ctrl into Menu Key

Hold down Fn
and right Ctrl key for 3s

M3W RGB System Commands (Mac)

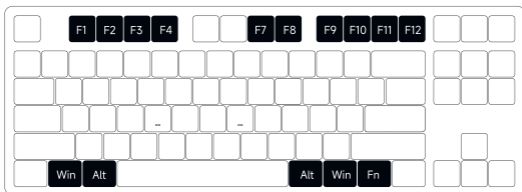

F1 Decrease display brightness

F2 Increase display brightness

F3 Open mission control

F4 Activate Siri

F7 Previous song

F8 Pause/Play

F9 Next song

F10 Mute

F11 Volume down

F12 Volume up

Left Win Option

Left Alt Command


Right Alt Command

Right Win Option

Fn + (F1-12)

F1 ~ F12

M3W RGB Backlight Settings

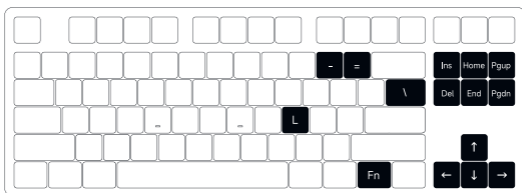

Fn+- Slower Animation

Fn+= Faster Animation

Fn+L Light On / Off

Fn+↑ Bright

Fn+↓ Dim

Fn+← Set Animation Direction to Left

Fn+→ Set Animation Direction to Right

Fn+Ins Effect1, Effect2, Effect3

Fn+Home Effect4, Effect5, Effect6

Fn+Pgup Effect7, Effect8, Effect9, Effect10


Fn+Del Effect11, Effect12, Effect13

Fn+End Effect14, Effect15, Effect16


Fn+Pgdn Effect17, Effect18, Effect19, Effect20

Fn+\ This shortcut allows you to set the backlight color to 7 single color with RGB loop effect

M3W RGB Wireless/Wired Connection Guide

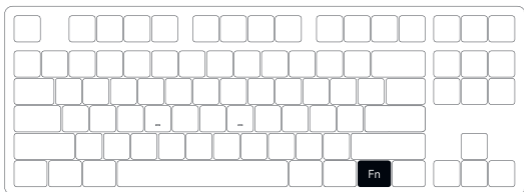

Fn+	E	Bluetooth Device 1
	R	Bluetooth Device 2
	T	Bluetooth Device 3
	Y	2,4G Wireless Device
	U	Wired Mode

 The switch is located under the CAPS key	Top: Mac (built-in power supply on)
	Middle: Default Windows (built-in power supply off)
	Bottom: Windows (built-in power supply on)

Bluetooth Pairing

After turning on the keyboard, press FN+E/R/T to enter Bluetooth mode. Press and hold the FN+E/R/T combination key for 3 seconds to put the keyboard in pairing mode, with the blue indicator light flashing quickly. Once the connection is established, the indicator light will stay on for 2 seconds. If the device fails to connect, the indicator light will turn off and the keyboard will enter sleep mode.

2.4G Pairing

After turning on the keyboard, press FN+Y to enter 2.4G mode. Then press and hold the FN+Y combination key for 3 seconds to enter pairing mode. Then insert the receiver, and the indicator light will flash quickly. Once pairing is successful, the LED indicator will stay on for 2 seconds. If no available device is found within 30 seconds, the LED indicator will turn off and the keyboard will enter sleep mode.

Battery Level Check

Press the Fn + Space combination keys to check the battery level in wireless mode. If the battery level is below 30%, the LED for number keys 1-2 will show a red light. If it's between 30-100%, the LED for number keys 1-9 will show a green light. And when the battery is fully charged, the LED for number keys 1-0 will show a green light.

1	2	3	4	5	6	7	8	9	0
Less than 30%	Less than 40%	Less than 50%	Less than 60%	Less than 70%	Less than 80%	Less than 90%	Less than 100%	Full charged	

Red light

Green light

Key/Lighting Effects Customization Instruction

1. The driver can be connected and lighting and key can be customized under the three working modes of the keyboard
2. The three working modes of the keyboard can be matched to drive the music rhythm
3. Please download the MonsGeek Cloud Driver on our website
4. Users can download the driver via www.monsgeek.com

MONGEEK Warranty and Service Statement

1. MONGEEK offers a One-Year warranty for customers in mainland China.
For other regions, please contact your seller (MonsGeek distributor) for specific warranty details.
2. If the warranty period expires, customers are responsible for repair costs.
MONGEEK provides instructions for self-repair if preferred, but users assume full responsibility for any losses incurred during the process.
3. Disassembling the keyboard without manufacturer/seller's instruction will void the warranty immediately.
4. Return and warranty policies may vary across platforms and are subject to the specific distributor's terms at the time of purchase.

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: www.monsgeek.com

Origin: Shenzhen, China



WARNING:
Water and Beverages can't be
poured into the Keyboard.



中国制造/Made in China

