

SELECTING PROPANE

SELECTING GAS

Step 1: Flip the FUEL CHOICE switch to LPG.

Step 2: Attach the LPG hose to both the generator inlet and the propane tank, then turn the tank on.

Step 3: Turn the FUEL SWITCH to OFF.

Step 1: Flip the FUEL CHOICE switch to GAS.




Step 2: Check generator for gasoline. Add as needed.

Step 3: Turn the FUEL SWITCH to ON.

FUEL CHOICE

GAS




LPG

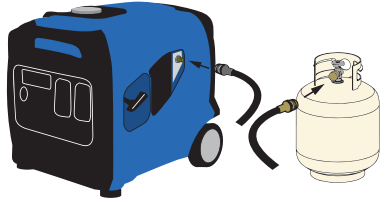

FUEL CHOICE

GAS

LPG

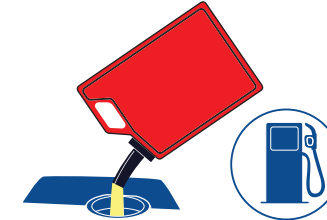

Step 4: Flip the START UP switch to ON.

Step 5: Flip the LOW IDLE switch to OFF.

Step 6: Flip the MAIN BREAKER to OFF.

Step 4: Flip the START UP switch to ON.


Step 5: Flip the LOW IDLE switch to OFF.

Step 6: Flip the MAIN BREAKER to OFF.

START UP

ON



OFF



LOW IDLE

ON

OFF




OR

START UP

ON



OFF



LOW IDLE

ON

OFF

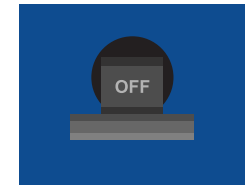

Step 7: Start the Generator.

Step 8: Flip the MAIN BREAKER to ON.

Step 9: Flip the LOW IDLE switch to ON.

Step 10: Plug devices in.

Step 7: Start the Generator.

Step 8: Flip the MAIN BREAKER to ON.

Step 9: Flip the LOW IDLE switch to ON.

Step 10: Plug devices in.




PUSH BUTTON



REMOTE





PULL START



LOW IDLE

ON

OFF

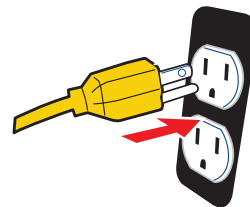


PUSH BUTTON



REMOTE



PULL START



LOW IDLE

ON

OFF

