INSTRUCTIONS

PHALT WALL

4533.1/52 4533.1/31 4533.2/52 4533.2/31

Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS:

- **Fitting:** Body made in aluminum with clear glass diffuser.
- **Lamp types:** 4533.1: 10W / 230V / GU10 LED
  4533.2: 2 x 10W / 230V / GU10 LED
- **Protection against electric shock:** CLASS I. Requires earth connection.
- **Ingress Protection:** IP44. Protection against the entry of solid bodies with dimensions more than 1mm. Protection against water splashes
- **Driver:** Not applicable
- **Quality/Corrosive rating:** Suitable for inland exterior applications
- **Ambient temperature range:** –8°C to +55°C.

INSTALLATION INSTRUCTIONS:

⚠ Electrical products can cause death, injury, damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.
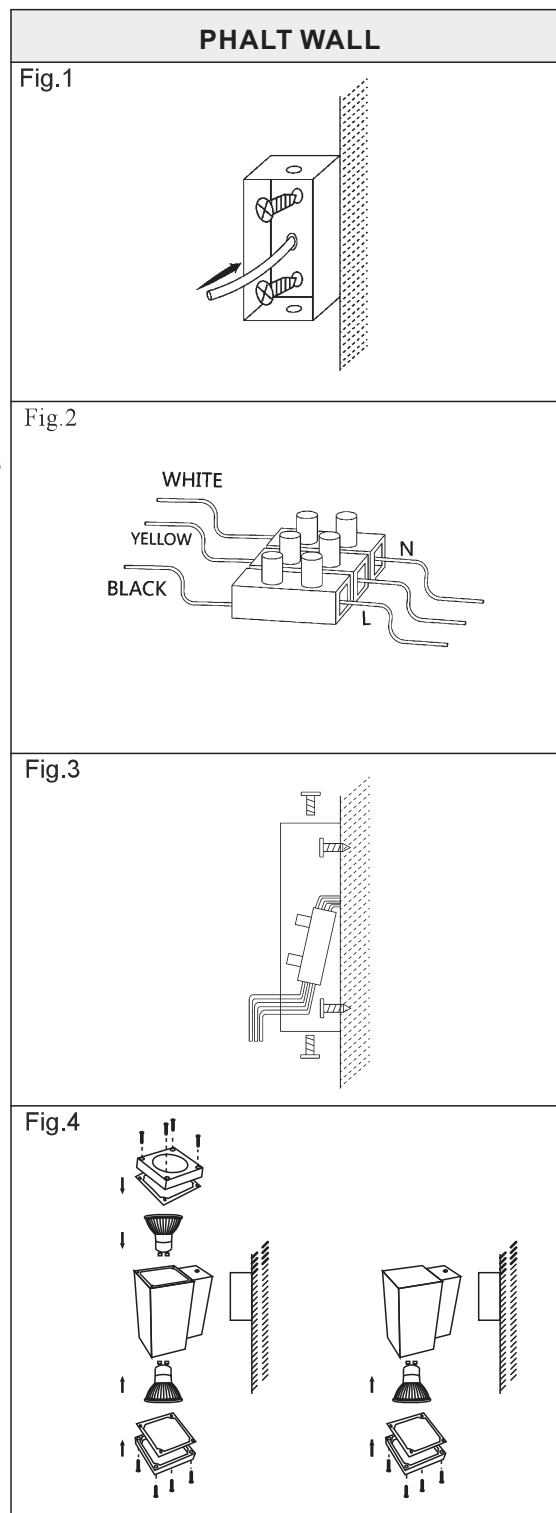
⚡

CAUTION: Risk of electric shock

Switch off mains supply.
- Fix the bracket to the wall. (Fig. 1)
- Connect the fitting to its electrical source (Fig. 2)
  Brown (Live) – to Brown or Red
  Blue (Neutral) – to Blue or Black
  Green/Yellow (Earth) – to Green/Yellow or Copper.
- Fix the base to the wall bracket (Fig. 3)
- Install the lamp and the glass shade (Fig. 4)

Switch on mains supply

WARNING:
- Ensure all items and screws are secure and fitted correctly.

PHALT WALL

Fig.1

Fig.2

WHITE
YELLOW
BLACK
N
L

Fig.3

Fig.4