


QUICKSTART ▶



M3 BORESCOPE DUAL ILLUMINATION VIEWING ACCESSORY (DIVA)

SYSTEM SET UP ▶



A Align DIVA at the end of the M3 Borescope so that the keyed aluminum piece aligns with the keyed notch.




E Connect the DIVA controller 5-pin connector to the M3 Borescope Controller.



B Press down the fastening spring button and slide together until DIVA snaps to connect.



F With the "I/O" in the off position, connect the power cord to the "24V" 2-pin connector and plug into wall outlet.

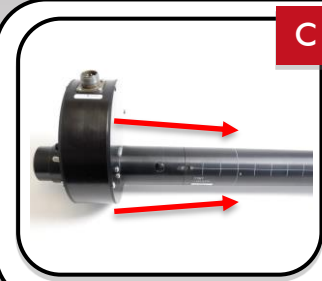

C Position M3 Borescope Controller to the keyed opposite end. Press and slide to connect.



G Turn "I/O" switch on and allow 5 seconds before controlling White and UV LED Intensity.



D Move "BLACK" switch to the UP position and move power selection switch to "24V" in the RIGHT position.



WARNING: "BLACK" switch must be in the UP position, and power selection must be in the RIGHT position labeled "24V". **POWER DIVA ONLY. DO NOT ALTER OR OPERATE M3 BORESCOPE CONTROLS WHILE DIVA IS POWERED.**



303 STATE ROUTE 94 • COLUMBIA, NJ 07832 • WWW.INTERTEST.COM

OFFICE: 908-496-8008 • HOURS: M – F, 8am to 5pm EST • E-MAIL: SERVICE@INTERTEST.COM

M3 BORESCOPE DUAL ILLUMINATION VIEWING ACCESSORY (DIVA)

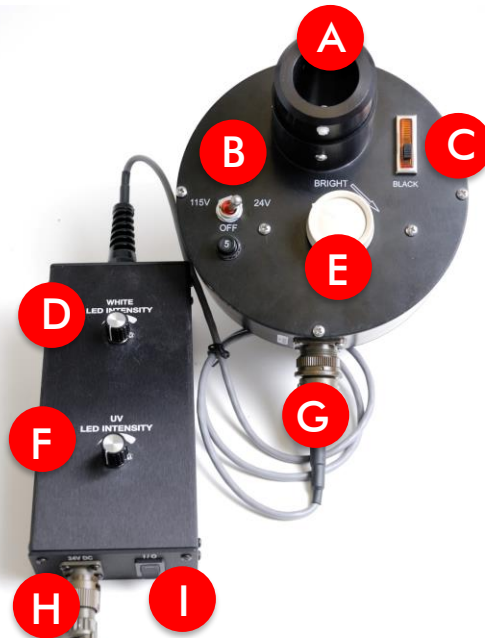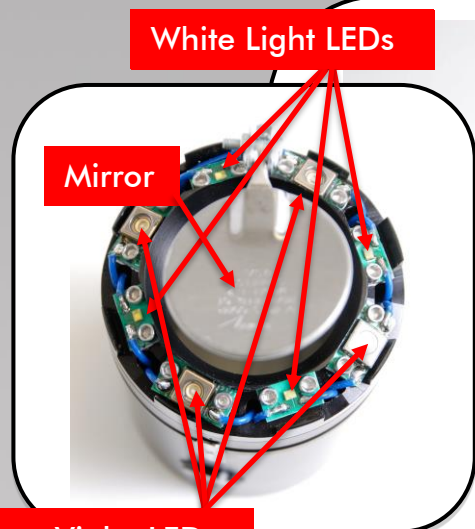

M3 BORESCOPE and DIVA CONTROL FUNCTIONS:

- A. M3 Borescope Pole Connection
- B. Power Selection 110V or 24V (**MUST BE 24V WITH DIVA**)
- C. Ultra-Violet (Black) Light On/Off Switch (**MUST BE ON WITH DIVA**)
- D. White Light LED Intensity
- E. M3 Borescope Light Intensity Control Knob (**ONLY FOR USE WITHOUT DIVA**)
- F. UV LED Intensity
- G. DIVA Pendant Controller Connection
- H. DIVA Pendant Controller Power Connection
- I. I/O Switch



303 STATE ROUTE 94 • COLUMBIA, NJ 07832 • WWW.INTERTEST.COM

OFFICE: 908-496-8008 • HOURS: M – F, 8am to 5pm EST • E-MAIL: SERVICE@INTERTEST.COM