INSTRUCTIONS

CAPRI RECT WALL LIGHT

4549.2.3030 4549.2.3031 4549.2.4030 4549.2.4031

Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Fitting:** Body made in Polycarbonate & ABS with Polycarbonate diffuser.
- Lamp types: 4549.2: 6W / LED 3000 or 4000K
- Protection against electric shock: CLASS II.
- **Ingress Protection:** IP65. Complete protection against dust and against the effects of water jets.
- Quality/Corrosive rating: Suitable for outdoor / indoor commercial applications
- Ambient temperature range: -20°C to +55°C.

INSTALLATION INSTRUCTIONS:

Electrical products can cause death, injury, damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.




CAUTION: Risk of electric shock

PLEASE NOTE: The light source contained on this luminaire shall only be replaced by the manufacturer or the service agent or a similar qualified person.

Ensure main supply is switched off.

- Remove the lamp cover.(Fig.1).
- Unscrew the small cover on PC diffuser.(Fig.2)
- Feed the main supply cable through the grommet of the base and fix the base to the wall (Fig.3)
- Connect the main cable to the terminal block provided and ensure correct connection as marked.(Fig.4): Brown(Live) - to Brown or Red Blue(Neutral) – to Blue or Black
- Screw the small cover tightly (Fig.5)
- · Re-attach the cover and switch on the main supply.(Fig.6)

WARNING: Ensure all items and screws are secure and fitted correctly.

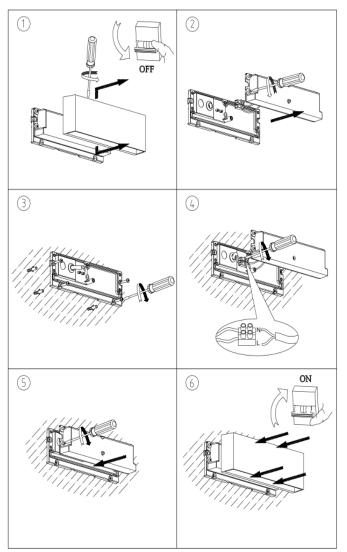

Spazio Lighting (Pty) LTD.

JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton CAPETOWN OFFICE: 36 Milner Street | Paarden Eiland DURBAN OFFICE: 31 Solstice Road | Umhlanga Ridge 011 555 5555 (Central Switchboard) | info@spazio.co.za

