




Installation




1. Please use the card to measure hole position correctly and drill 2 holes of 8mm with depth 60 -65 mm on the wall




2. Fix expansion plugs into the holes



3. Fix the screws into the expansion plugs leaving some space to hook the fitting on.

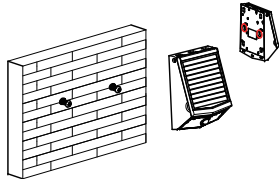

4. Attach the fitting to the screw heads

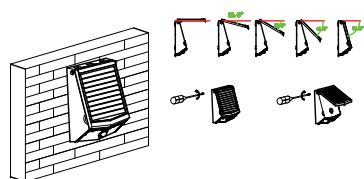

5. Loosen the screws on the top side of the panel, adjust the solar panel to the appropriate angle, press the button to set the work mode, re-tighten the screws to set the solar panel angle in place.



SUNPACK User Manual



4602.4030

5W/592LM



Notice & Warning

1. This is a solar powered lamp, please install it in a location where it can get enough sunshine.
2. Please note the lighting time depends on the sunshine duration & weather.
3. The lamp will light up automatically at dusk.
4. Build-in intelligent integrated circuit with over-charge, over-discharge, over-voltage protection.
5. The lamp is equipped with an internal battery pack, which is replaceable. If any need, please contact sellers for correct new battery pack.
6. If the battery is taken out and put back in or replaced with new ones, please place the solar panel in sunshine or a strong light to activate the lamp.
7. Non-professionals please do not disassemble the lamp.
8. Please do not dispose the battery with household garbage to avoid explosion.

Please read and follow all instructions to operate.
Save this manual for future reference.

Spazio Lighting (Pty) LTD.
JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton
CAPE TOWN OFFICE: 36 Milner Street | Paarden Eiland
DURBAN OFFICE: 31 Solstice Road | Umhlanga Ridge
011 555 5555 (Central Switchboard) | info@spazio.co.za

Specification

Product Type	Solar LED Wall Light---Transformer
Power/Lumen	5W/592Lm
Dimension	197X154X77.5MM
LEDS	SMD2835,30PCS(main light)+6Pcs(wall washing light)
Li-ion Battery Pack	18650/3.7V/3000mAh, replaceable
Solar Panel	2.4Wp Monocrystalline silicon
Working Mode	2 Different lighting modes
Detection Angle/Area	120°/2-6meter
Material	ABS+PC
Beam Angle	80°*100°
IP Degree	IP65
Install Height	2-4Meter
Lifespan	35000hrs
Warranty	24 Months warranty(Battery 12months warranty)
Packing	Brown box(1*Solar Light, 1*Screws Bag, 1*User Manual)

Working Modes

Please Note: When switching to a different working mode, the lamp will flash once, this is normal and indicates that the working mode has been changed successfully.



Please press the button to adjust to different working mode:



Press 1st time for Mode A,
Press 2nd time for Mode B,
Press 3rd time for off



Mode A

Automatically turns on at dusk and remain 50% brightness constantly (motion sensor disabled). After 5 hours or when battery capacity is below 30%, it will turn to Mode B.



Mode B

Main light automatically turns on to full brightness at 592Lm (bottom wall washing light off) when motion is detected in the range of <6mtrs, bottom wall washing light automatically turns on (main light off) in 20 seconds of no motion.