




# Ambrosia

## Ciszak Dalmas

**marset**




**Ambrosia 120**



(1) The height can be increased by means of the 15.7" or 23.6" poles (max. 3 units) They can be combined.

(2) Lightpoint

**Ambrosia 180**



**Aluminum structure. Methacrylate light tube.**

- Black
- Matt Gold

**Ambrosia 120**

Light source Ambrosia 22K:  
LED SMD 24Vdc 19,2W 2200K CRI80 2116lm  
Luminaire Ambrosia 22K:  
(Power supply not included) 1885lm

Light source Ambrosia 27K:  
LED SMD 24Vdc 19,2W 2700K CRI90 2028lm  
Luminaire Ambrosia 27K:  
(Power supply not included) 1891lm

Light source Ambrosia 30K:  
LED SMD 24Vdc 19,2W 3000K CRI90 2256lm  
Luminaire Ambrosia 30K:  
(Power supply not included) 1927lm

**Ambrosia 180**

Light source Ambrosia 22K:  
LED SMD 24Vdc 28,8W 2200K CRI80 3174lm  
Luminaire Ambrosia 22K:  
(Power supply not included) 2823lm


Light source Ambrosia 27K:  
LED SMD 24Vdc 28,8W 2700K CRI90 3042lm  
Luminaire Ambrosia 27K:  
(Power supply not included) 2833lm

Light source Ambrosia 30K:  
LED SMD 24Vdc 28,8W 3000K CRI90 3384lm  
Luminaire Ambrosia 30K:  
(Power supply not included) 2886lm


**Canopy and Outlet Box (power supply)**  
Luminaire: 120 - 277 VAC 0-10V

**Canopy Ambrosia 60W / 0-10V**

One canopy can feed one or two fixtures.




**Outlet Box Cover Plate**




The installation and location of the remote LED driver must be in accordance with the specific regulations of each country and will be the exclusive responsibility of the installation company.

**Pole**



The starting point for the Ambrosia was to bring back the traditional Linestra lamp to update it and show that a technical, resolute design can also be poetic.



Dry locations only




**Watch the video**

marsetusa@marset.com  
www.marset.com




**Ambrosia 210**



(1) The height can be increased by means of the 15.7" or 23.6" poles (max. 3 units per each side). They can be combined.

(2) Lightpoint

**Ambrosia 315**

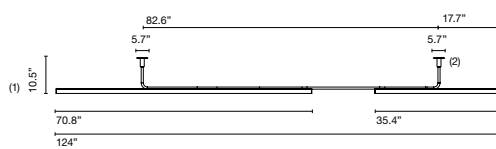

Aluminum structure. Methacrylate light tube.

- Black
- Matt Gold

**Ambrosia 210**

Light source Ambrosia 22K:  
LED SMD 24Vdc 28,8W 2200K CRI80 3174lm  
Luminaire Ambrosia 22K:  
(Power supply not included) 2802lm

Light source Ambrosia 27K:  
LED SMD 24Vdc 28,8W 2700K CRI90 3042lm  
Luminaire Ambrosia 27K:  
(Power supply not included) 2812lm

Light source Ambrosia 30K:  
LED SMD 24Vdc 28,8W 3000K CRI90 3384lm  
Luminaire Ambrosia 30K:  
(Power supply not included) 2865lm

**Ambrosia 315**

Light source Ambrosia 22K:  
LED SMD 24Vdc 43,2W 2200K CRI80 4761lm  
Luminaire Ambrosia 22K:  
(Power supply not included) 4220lm

Light source Ambrosia 27K:  
LED SMD 24Vdc 43,2W 2700K CRI90 4563lm  
Luminaire Ambrosia 27K:  
(Power supply not included) 4235lm


Light source Ambrosia 30K:  
LED SMD 24Vdc 43,2W 3000K CRI90 5076lm  
Luminaire Ambrosia 30K:  
(Power supply not included) 4314lm

**Canopy and Outlet Box (power supply)**


Luminaire: 120 - 277 VAC 0-10V

**Canopy Ambrosia 60W / 0-10V**

One canopy can feed one or two fixtures.




**Outlet Box Cover Plate**



The installation and location of the remote LED driver must be in accordance with the specific regulations of each country and will be the exclusive responsibility of the installation company.

**Pole**



The starting point for the Ambrosia was to bring back the traditional Linestra lamp to update it and show that a technical, resolute design can also be poetic.

dimnable

Dry locations only





**Watch the video**

marsetusa@marset.com  
www.marset.com





**120V - 277V Installation options with canopy (60W / 0-10V)**

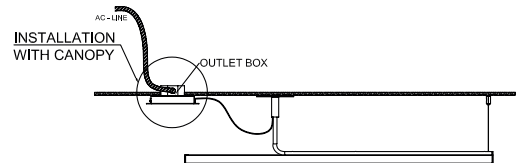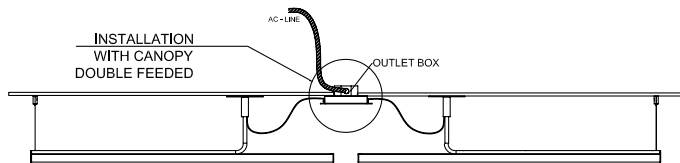

**24 Vdc remote driver Installation options without canopy**

Remote driver not supplied by Marset.

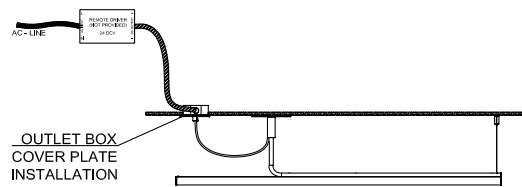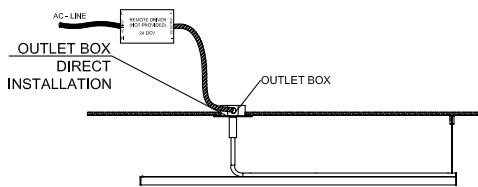

**⚠ WARNING.** California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)