

INSTRUCTIONS



ARGUS BOLLARD

4639.06.30.52

4639.06.40.52

Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS:

- **Fitting:** Aluminum body with polycarbonate diffuser.
- **Lamp types:** 6W / LED 3000K and 4000K
- **Protection against electric shock:** CLASS I requires earth connection.
- **Ingress Protection:** IP 44. Protection against the entry of object greater than 1mm and water splashes.
- **Driver:** Includes LED Driver
- **Quality/Corrosive Rating:** Suitable for outdoor domestic and commercial applications.
- **Ambient temperature range:** -20° to +40°

INSTALLATION INSTRUCTIONS:

⚠ Electrical products can cause death, injury or damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.



CAUTION: Risk of electric shock

PLEASE NOTE: The light source contained on this luminaire shall only be replaced by the manufacturer or the service agent or a similar qualified person.

Ensure mains supply is switched off.

- Mark and drill three holes according to the base where you would like to install the fitting. (Fig. 1)
- Insert the plastic expansion screws.
- Pull out the terminal block mount from the fitting and remove the terminal block from it and connect to the mains supply (Fig. 2)

Brown (Live) - to Brown or Red

Blue (Neutral) - to Blue or Black


Green/Yellow (Earth) - to Green/Yellow or Copper.

- Re-attach the terminal block to the mount and re-insert it into the fitting. (Fig. 3)
- Install the fitting on the ground with the screws provided

Switch on mains supply

WARNING

- Ensure all items and screws are secure an fitted correctly.

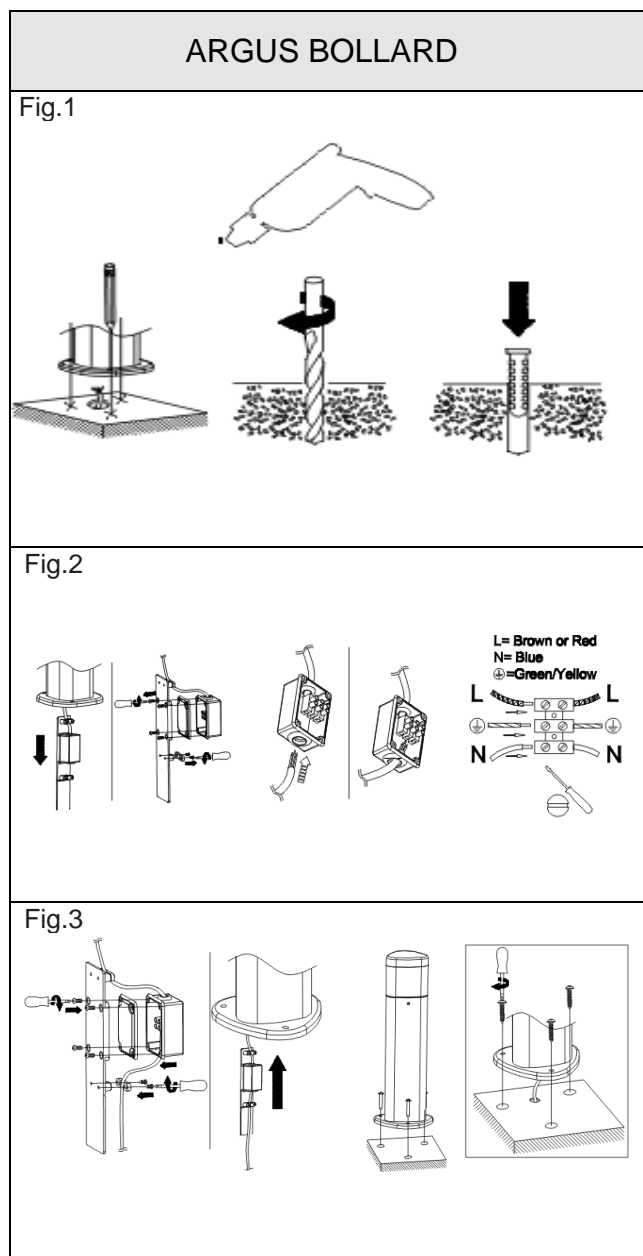

Spazio Lighting (Pty) LTD.

JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton

CAPETOWN OFFICE: 36 Milner Street | Paarden Eiland

DURBAN OFFICE: 31 Solstice Road | Umhlanga Ridge

011 555 5555 (Central Switchboard) | info@spazio.co.za