

Introduction

Aksa power generation system, providing optimum performance, and reliability, for stationary standby, prime power, and continuous duty applications. All generator sets are factory build, and production tested.

Power

3 Phase, 50 Hz, PF 0.8

Voltage (V)	STANDBY RATING (ESP)		PRIME RATING (PRP)		STANDBY CURRENT (A)
	kW	kVA	kW	kVA	
400 / 231	380.0	475	352.0	440	686

STANDBY RATING (ESP) Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528-1. Overload is not allowed.

PRIME RATING (PRP) Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528-1. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation.

General Characteristics

Model Name	APD 475 C
Frequency (Hz)	50
Fuel Type	Diesel
Engine Make and Model	CUMMINS 6ZTAA13-G2
Alternator Make and Model	Aksa AK 6371 (400)
Control Panel Model	DSE 7320
Canopy	MS 70 CK
Noise Level @1m , @7m (dB(A))	94 / 85

Engine Specifications

General Data

Manufacturer	CUMMINS
Engine Model	6ZTAA13-G2
Number of Cylinders / Type	6 cylinders - in line



Bore mm (in)	130
Stroke mm (in)	163
Displacement l (cu. In)	13
Compression Ratio	17:1
Engine Speed (rpm)	40
Standby Power (kW/hp)	415/557
Prime Power (kW/hp)	390/523
Block Heater (QTY)	1
Block Heater Power (Watt)	4000
Governor System	Electronic
Air Filter	Dry Type
Aspiration	Turbo Charged and Charge Air Cooled

Lubrication System

Oil Capacity (l)	45.42
------------------	-------

Fuel System

Fuel Type	Diesel
Injection Type	Direct Injection
Type of Fuel Pump	BYC PB

Electrical System

Operating Voltage (Vdc)	24 Vdc
Battery and Capacity (Qty/Ah)	2x120

Cooling System

Cooling Method	Water Cooled
Coolant Capacity (engine only) (l)	23.1

Exhaust System

Exhaust Gas Flow ft ³ /min (L/s)	79.3
Exhaust Back Pressure in-Hg (kPa)	13
Exhaust Gas Temperature °C (F)	668
Heat Rejection to Exhaust kW (BTU/min)	359

Radiator

Total Coolant Capacity l (gal)	86.1
Cooling Fan Air Flow m ³ /min (ft ³ /min)	618
External Restriction to Cooling Airflow (Pa)	125



Fuel Consumption

Fuel Cons. @100% Prime Load kg/h (l/h)	89.1
Fuel Cons. @75% Prime Load kg/h (l/h)	65.1
Fuel Cons. @50% Prime Load kg/h (l/h)	43.2

Alternator Characteristics

Manufacturer	Aksa
Alternator Model	AK 6371
Frequency (Hz)	50
Power (kVA)	464
Voltage (V)	400
Phase	3
A.V.R.	SX440
Voltage Regulation	1
Insulation Class	H
Protection Class	IP23
Rated Power Factor	0.8
Weight Complete Generator (kg)	1263
Cooling Air (m ³ /min)	62.1

Open Generator Set Dimensions

Length mm (ft)	3180
Width mm (ft)	1550
Height mm (ft)	2181
Dry Weight kg (lb)	3440
Full Tank Capacity (l)	700


Canopy Characteristics

Length mm (ft)	4463
Width mm (ft)	1606
Height mm (ft)	2559
Dry Weight kg (lb)	4340
Size lt (gal)	700

Control Panel



Manufacturer	DSE
Control Module Model	DSE 7320
Communication Ports	MODBUS

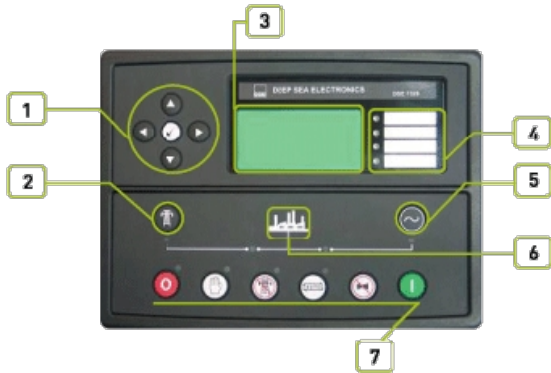

1. Menu navigation buttons
2. Close mains button
3. Main Status and instrumentation display
4. Alarm LED's
5. Close generator button
6. Status LED's
7. Operation selecting buttons

Standard Devices

DSE model 7320, Auto Mains Failure control module, with a highly sophisticated level of new features and functions
 Static battery charger, Fuses for control circuits

Control Unit

- The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines.
- The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.
- The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Construction and Finish

- Components installed in sheet steel enclosure.
- Phosphate chemical, pre-coating of steel provides corrosion resistant surface
- Polyester composite powder topcoat forms high gloss and extremely durable finish
- Lockable hinged panel door provides for easy component access

Installation

The Control panel is mounted at the generating set baseframe on robust steel stand or power module. Located at side of generating set with properly panel visibility.

Engine

- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due

Shut Down

- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage

Warnings

- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- Loss of speed signal



- Oil pressure sensor open
- Phase rotation

Generator

- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earthcurrent
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phasesequence

Pre-alarms

- Low oil pressure
- High engine temperature
- Low engine temperature
- Under/over speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning

Electrical Trip

- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Mains

- Voltage (L-L, L-N)
- Frequency

Expansions

- Additional LED module (2548)
- Expansion relay module (2157)
- Expansion input module (2130)

Options

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm

Control Panel Compliance List

- Electrical Safety / Electro Magnetic Compatibility (EMC)
- BS EN 61000-6-2 EMC Generic Immunity Standard
- BS EN 61000-6-4 EMC Generic Emission Standard
- BS EN 60950 Electrical Safety

Static Battery Charger

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.
- Battery charger models' output V-I characteristic is very close to square
- 2405 has fully output short circuit protection and it can be used as a current source.
- 2405 charger has high efficiency, long life, low failure rate, light-weight and low heat radiated in accordance with linear alternatives.
- The charger is fitted with a protection diode across the output.
- Charge fail output is available.
- Connect charge fail relay coil between positive output and CF output.
- Input: 196-264V.
- Output: 27,6V 5A or 13,8V 5A.

Standard Equipment

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)



- Static battery charger
- Manual for application and installation

Optional Equipment

Engine

- Fuel-Water Separator Filter
- Oil heater

Control Panel

- Automatic synchronising and power control system (Multi gen-set Parallel)
- Parallel system with mains
- Transition synchronization with mains
- Alarm output relays
- Earth fault, single set
- Parallel system with mains
- Remote relay output
- Remote communication with modem
- Charge Ammeter

Auxiliary Equipment

- Main Fuel Tank
- Automatic or manual fuel filling system
- Electrical or manual oil drain pump
- Low and high fuel level alarm
- Inlet and outlet motorized louvers
- Inlet and outlet acoustic baffles
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant (-30°C)

Canopy

- Galvanized Coating
- ISO Container
- Marine Grade Paint

Aksa Certificates

Directive

- 2006/42/EC : Machinery Safety Directive
- 2004/108/EC : Electromagnetic Compatibility Directive
- 2006/95/EC : Low Voltage Directive

Standarts

- EN ISO 8528-13:2016 : Reciprocating internal combustion engine-driven alternating current generating sets- Part:13: Safety

Alternator

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

Transfer Panel

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

Exhaust

- Residential Silencer
- Silencer Spark Arrester
- Critical Silencer
- Catalytic Converter

Optional Alternator and Control Panel

Please contact to your reseller for additional Alternator, Control Panel and Breaker Switch options.

