

INSTRUCTIONS

IPAD LED Flood Light

4645.10.XX	4645.20.XX	4645.30.XX
4645.50.XX	4645.80.XX	4645.100.XX

Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS:

- **Fitting:** Body made in aluminium alloy with tempered glass diffuser.
- **Lamp types:**
 - 4645.10.XX: 10W / LED 3000K or 4000K
 - 4645.20.XX: 20W / LED 3000K or 4000K
 - 4645.30.XX: 30W / LED 3000K or 4000K
 - 4645.50.XX: 50W / LED 3000K or 4000K
 - 4645.80.XX: 80W / LED 3000K or 4000K
 - 4645.100.XX: 100W / LED 3000K or 4000K
- **Range of mounting heights:** 0 to 2.9 Meters
- **Protection against electric shock:** CLASS I. Requires earth connection
- **Ingress Protection:** IP65, complete protection against the entry of dust and water jets.
- **Driver:** Integral driver included
- **Quality/Corrosive rating:** Suitable for commercial use and indoor/outdoor applications.
- **Ambient temperature range:** -8°C to +45°C
- **Operating Position:** Universal

INSTALLATION INSTRUCTIONS:


⚠ Electrical products can cause death, injury and damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.

Ensure mains supply is switched off.

- Mount the bracket on the wall and connect the fitting to the mains supply. (Fig. 2)
- Re-connect the fitting to its bracket.(Fig 3)
- Turn On Power (Fig. 4)

WARNING:

- Ensure all items and screws are secure and fitted correctly.

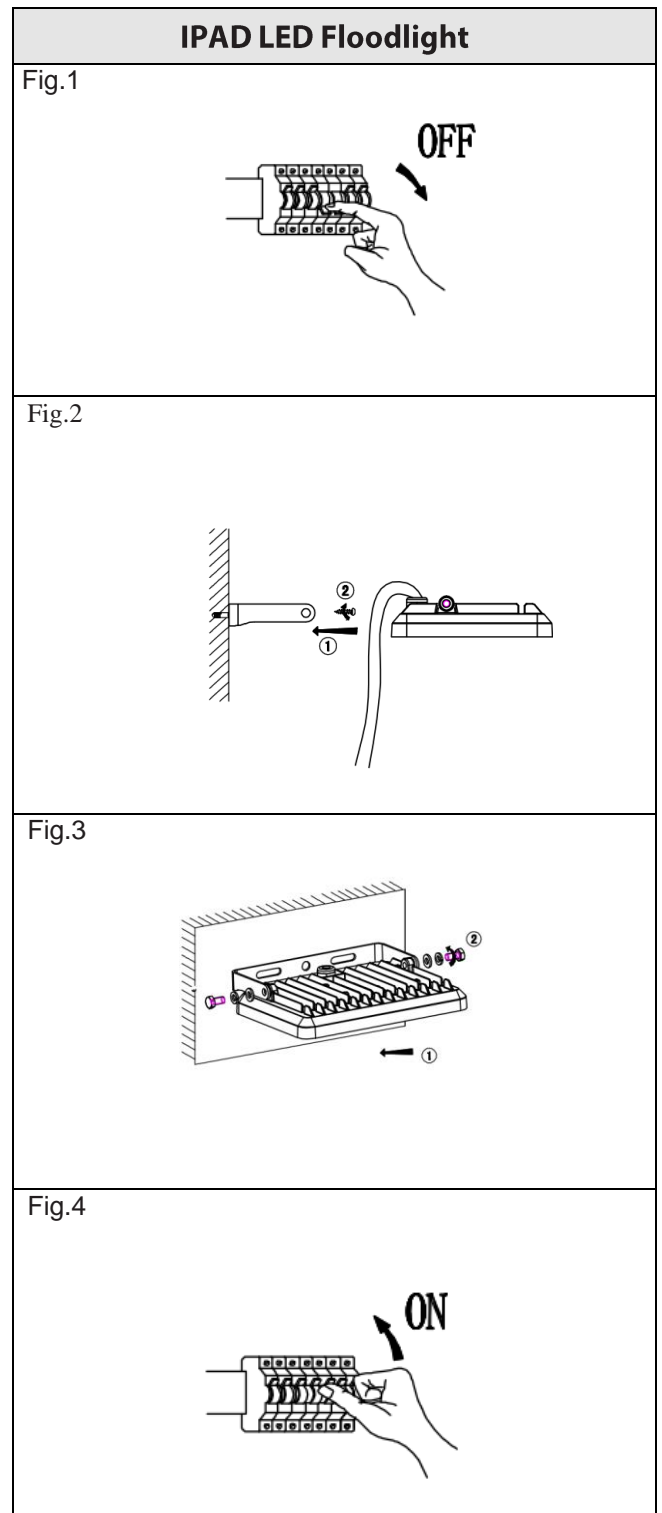

Spazio Lighting (Pty) LTD.

JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton
CAPE TOWN OFFICE: 36 Milner Street | Paarden Eiland
DURBAN OFFICE: 31 Solstice Road | Umhlanga Ridge
011 555 5555 (Central Switchboard) | info@spazio.co.za