

# INSTRUCTIONS

## COMPOSITE FLOODLIGHT



4646.10.30.30  
4646.10.40.30

4646.30.30.30

4646.50.30.30  
4646.50.40.30

4646.100.30.30  
4646.100.40.30

Please read the instructions before commencing installation and retain for future reference.

### SPECIFICATIONS:

- **Fitting:** Aluminium heatsink, thermoplastic body and tempered glass diffuser
- **Lamp types:**  
10W / 50W / 100W / LED                      3000K and 4000K  
30W / LED    4000K
- **Protection against electric shock:** CLASS I. Requires earth connection.
- **Ingress Protection:** IP65. Complete protection against dust and water jets
- **Driver:** Includes LED driver.
- **Quality/Corrosive rating:** Suitable for coastal Installation, commercial use and indoor/outdoor applications.
- **Ambient temperature range:** -8°C to +55°C.

### INSTALLATION INSTRUCTIONS:


**⚠** Electrical products can cause death, injury, damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.

#### Ensure mains supply is switched off.

- Select a suitable mounting position. (Fig. 1)
- With a suitable mounting position identified, securely fix the U shape mounting bracket to the mounting surface. (Fig. 2)
- Connect the fitting to its electrical source in compliance with the SANS 10142 quality standard mentioned above (Fig 3)
- Switch on mains and adjust the bracket angle as required (Fig. 4)

#### WARNING:

- Ensure all items and screws are secure and fitted correctly.

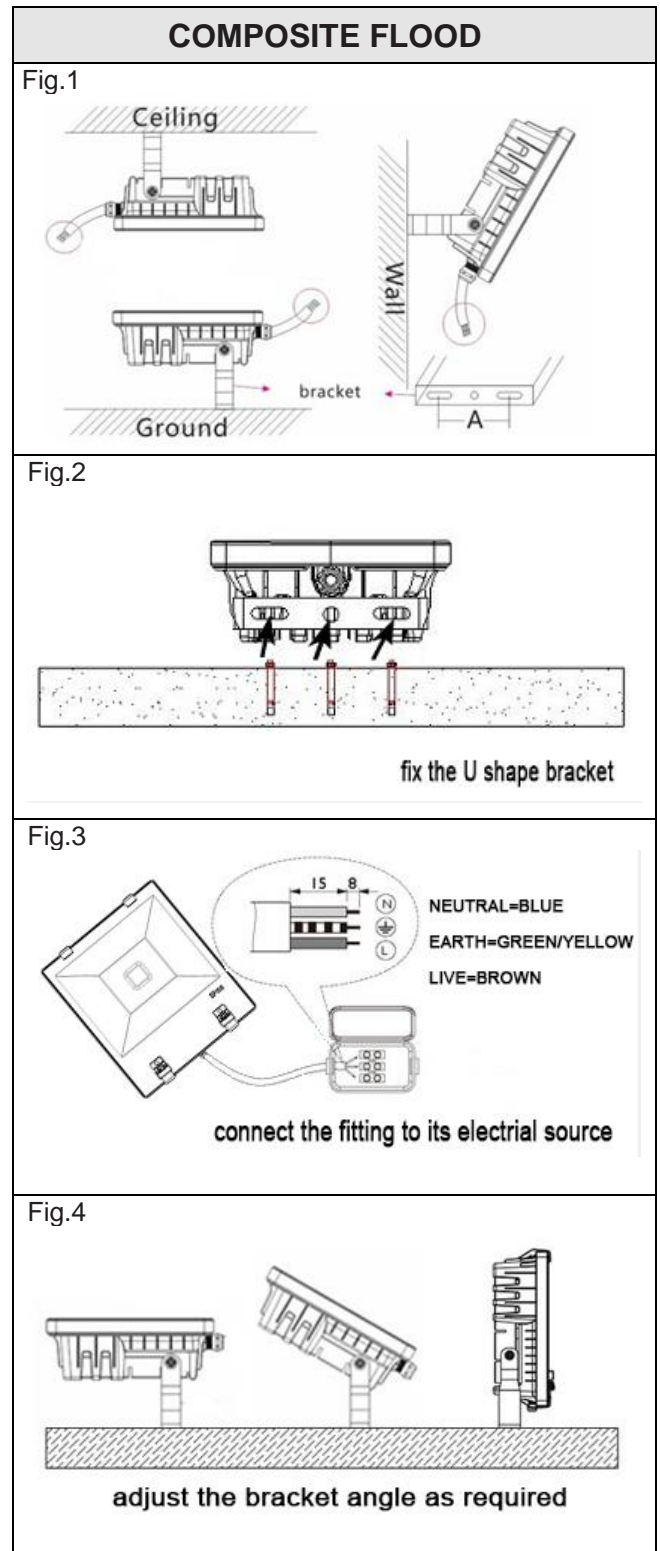

Spazio Lighting (Pty) LTD.

JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton

CAPE TOWN OFFICE: 36 Milner Street | Paarden Eiland

DURBAN OFFICE: 31 Solstice Road | Umhlanga Ridge

011 555 5555 (Central Switchboard) | info@spazio.co.za