

INSTRUCTIONS



KTM LED FLOOD

Please read the instructions before commencing installation and retain for future reference.

10W: 4647.10.40.30	20W: 4647.20.40.30
30W: 4647.30.40.30	50W: 4647.50.40.30
100W: 4647.100.40.30	200W: 4647.200.40.30
400W: 4647.400.40.30	

SPECIFICATIONS:

- Fitting:** Aluminum body with tempered glass diffuser.
- Lamp types:** 10W - 400W / LED 4000K
- Dimensions:**

10W: 90 x 70 x 20mm	20W: 120 x 90 x 20mm
30W: 150 x 130 x 21mm	50W: 190 x 170 x 21mm
100W: 260 x 240 x 21mm	200W: 380 x 340 x 45mm
400W: 500 x 380 x 55mm	
- Protection against electric shock:** CLASS I. Requires earth connection.
- Ingress Protection:** IP65. Protection against water jets and the entry of dust.
- Driver:** Integral drive included
- Quality/Corrosive rating:** Suitable for inland outdoor/indoor residential and commercial applications
- Ambient temperature range:** -25°C to +45°C.

INSTALLATION INSTRUCTIONS:

! Electrical products can cause death, injury, damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.



CAUTION: Risk of electric shock

PLEASE NOTE: The light source contained on this luminaire shall only be replaced by the manufacturer or the service agent or a similar qualified person.

- Ensure mains supply is switched off. (Fig.1)
- Remove fitting from its bracket and attach the bracket to the wall. (Fig.2a and Fig.2b)
- Connect the fitting to its electrical source. (Fig.3)
 - Brown (Live) - to Brown or Red
 - Blue (Neutral) - to Blue or Black
 - Green/Yellow (Earth) - to Green/Yellow or Copper.
- Re-attach the fitting to the bracket and switch on mains supply (Fig. 4)

WARNING:

Ensure all items and screws are secure and fitted correctly.

KTM LED FLOOD

Fig.1




Fig.2a




Fig.2b




Fig.3

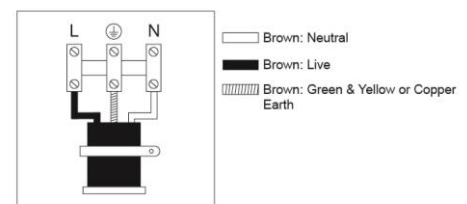


Fig.4

