



# SUTA



This **SUTA** product is backed by a 20-year limited warranty.  
For more information, visit:


[www.sutabedding.com](http://www.sutabedding.com)

For service in Canada, please visit [www.performancesleep.ca](http://www.performancesleep.ca)

# SUTA

200i ADJUSTABLE BASE

OWNERS MANUAL

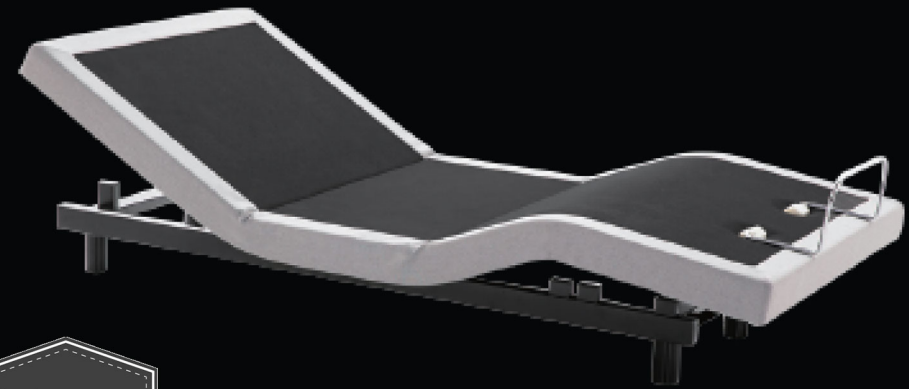

## WARNINGS

**IMPORTANT: PLEASE READ ALL SAFETY INSTRUCTIONS THOROUGHLY BEFORE USING THIS PRODUCT. SAVE THESE INSTRUCTIONS.**

### ELECTRICAL

This product is for use on a standard 120-volt circuit.

Always use a grounded, electrical surge protection device with this product. This product should be plugged directly into the surge protection device and the surge protection device should be plugged directly into a wall outlet.

Only connect this product to a properly grounded outlet.

Always unplug this bed from the electrical outlet before cleaning or servicing.

Never operate with a damaged cord or plug. Keep the cord away from this products moving parts.

Keep the cord away from heated surfaces.

Do not use this product outdoors.

To disconnect, turn all controls to the off position, then remove plug from outlet.

### SMALL CHILDREN / PETS

Immediately dispose of all packing materials that may pose a suffocation risk.

Do not allow children or pets to play on or under the bed. Children should not operate this product without adult supervision.

### PACEMAKERS

Some pacemakers may detect motion by this product as a false sense of movement and/or exercise.

This may or may not affect your pacemaker. Talk to a physician to address any concerns.

## HOME USE / HOSPITAL DISCLAIMER

This product is designed solely for in-home use and not as a hospital bed. The product does not meet hospital standards. Do not use with oxygen or other flammable gasses.

## WEIGHT RESTRICTIONS

The recommended weight restrictions for the 200i Adjustable Base are as follows:  
(all weights include the weight of the mattress and bedding)

Twin: 750 lbs. | Full: 750 lbs. | Twin XL: 750 lbs. | Queen: 750 lbs. | Split Beds: 750 lbs. per side

This product will support the recommended weight limits when weight is distributed evenly across the base. This product is not designed to support or lift this amount in the head or foot sections alone. Consumers should not enter or exit the bed when any portion of it is in the raised position. Do not sit on the head or foot sections while in the raised position. Exceeding the recommended weight restrictions or other misuse of this product could damage the bed and void the warranty.

## PRODUCT RATINGS

**IMPORTANT: USE THIS PRODUCT ONLY AS DESCRIBED IN THESE INSTRUCTIONS. DO NOT MODIFY ANY PARTS OR COMPONENTS.**

### MOTOR RATINGS

The 200i Adjustable Base motors are not designed to operate for more than two [2] continuous minutes within an eighteen [18] minute time period. Exceeding this rating will shorten the life of the motors, and will void the warranty.

### POWER RATINGS

**INPUT:** AC 100-240V - 50/60Hz, 1.5 Amp

**OUTPUT:** DC 29V-2A

**FUSE:** 1.5A 250V

If a short-circuit occurs, a fuse in the electrical motor compartment will be blown in order to protect the electrical components. Should this occur, the customer should seek professional assistance by calling a licensed electrician or by contacting customer service.

This product is designed to have no maintenance requirements by the user. Please do not open any motor compartments, alter the wiring, modify the base, or change the product in any way as it will void the warranty.

## FCC COMPLIANCE

Operates on 2.4 GHz frequency transmitter.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.






To comply with the FCC RF exposure requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirement and void users right to operate the device.

For any questions or concerns regarding this product please contact  directly:

[www.sutabedding.com](http://www.sutabedding.com)



## CONTENTS

	Overview	1 - 2
	Assembly	3 - 8
	Remote Control	9 - 10
	Electric Components and Backup Battery	11 - 14
	Test All Functions / Additional Help	15 - 18




## OVERVIEW


### Get to know your product

Before beginning assembly of the 200i AdjustableBase, please take a moment to familiarize yourself with the parts and location of components. See the adjacent image for a detailed overview.

If any parts or components are missing, or are different than shown in the adjacent image, do not attempt to complete the assembly process and contact customer support.

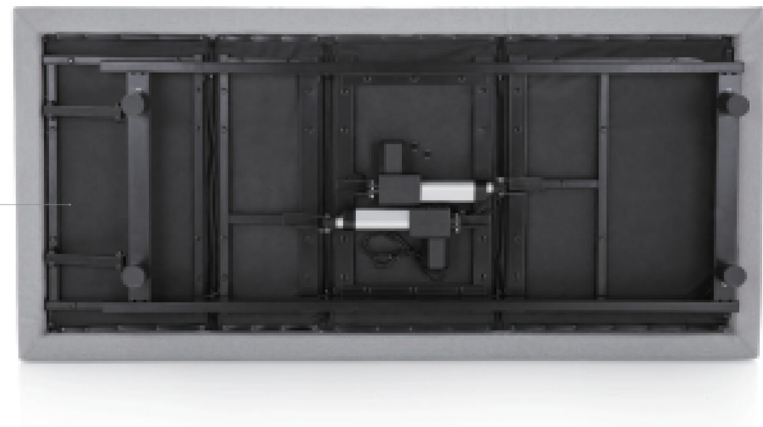

Bed Motor

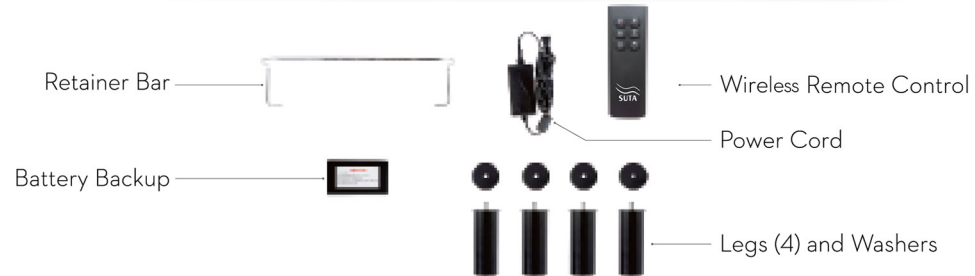

**ASSEMBLY**


**Step 1:**

Place the box in the room the bed will be used with the bottom of the box facing up. Carefully remove the binding straps and packaging material, taking care not to puncture the box with any sharp objects.


**Step 2:**

Remove the bed base from the box and set mattress side down on the floor (see image A). Remove all plastic and zip ties. All components and parts are located in the underside of the base. Remove attached parts and set aside in preparation for assembly (see image B). Check to make sure all parts have been included and are not damaged (see page 2 for a list of all parts and components).

A

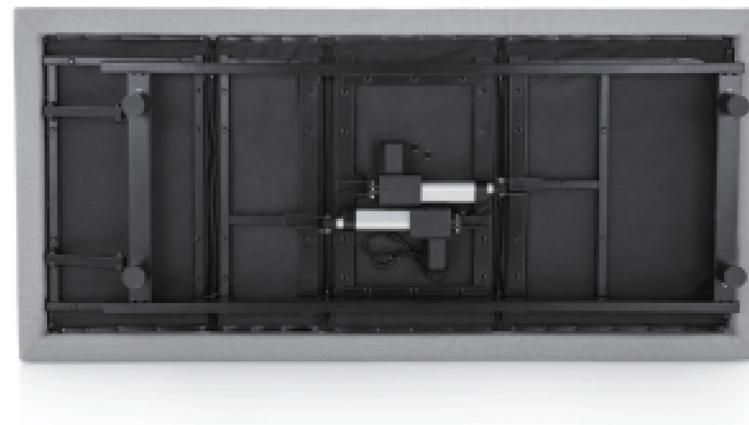

B

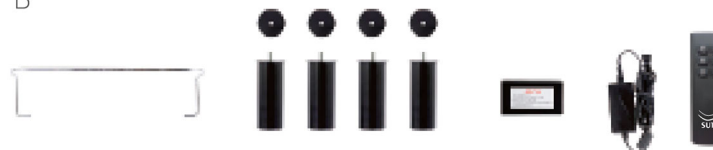



**ASSEMBLY**

**Step 3:**

Place the washers on the legs and hand tighten all four (4) legs into the bed frame until secure. Note that there are two location options for each leg, an outside placement or an inside placement. Tighten the legs in the location of your choosing, maintaining a consistent inside or outside location throughout. Take care not to over tighten (see *image A*).

**Step 4:**

Install the power cord by connecting the cord jack to the receptacle on the bed motor (see *image B*). Be sure the cord is connected completely and securely.

A



B



## ASSEMBLY

### Step 5:

With two (2) to four (4) people, lift the bed by the metal frame and turn it over so the mattress side is facing up. Take caution not to lift the bed with the fabric, or to use the legs as pivot points causing angled pressure as this may cause damage. Move the bed to the desired location.

### Step 6:

To install the mattress retainer bar, place the bar over the receiving area on the foot end of the bed. Press firmly until the bar snaps into the slot. Repeat for the other side. The assembly is now complete.

Plug the power cord into the wall outlet and run the test on pages 15 – 16 of this manual. You may want to familiarize yourself with the remote control functions (pages 9 – 10) prior to running the test.

A







## REMOTE CONTROL

### Overview

1. Press the pairing button  on the receiver until the green LED turns on. You have 10s for the pairing process.
2. Press Keys ① and ② of the handset simultaneously until the LED on the receiver starts blinking confirms successful pairing.

Note.

For pairing the distance between transmitter and receiver should be less than 2 meters.

A




**ELECTRIC  
COMPONENT  
SETUP**

**Overview**


The electronic components are pre-installed and no assembly is necessary, however, some input locations are important for proper set up and functionality (see images A & B to become familiar with input, setting and part locations).

A

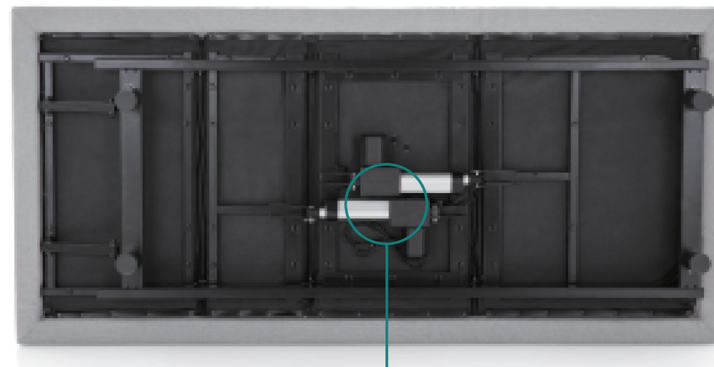

B

B



Head and Foot Motor

Power Cord/Remote Control  
Input Connecting Cables

## BACKUP BATTERY

### Overview

**t:** *The backup battery is only to be used in case of a power outage. Batteries are not to be used for normal operation of the bed.*

### Backup Battery Use:

Use twelve (12) AAA batteries only (not included). If a power outage occurs install the AAA batteries into the provided battery pack (see image A). Remove the power cord from the input location under the bed and plug in the backup battery pack as shown in image B. The backup battery will not support repeated movement for long periods of time. While using the backup battery it is recommended to move the head and foot of the bed independently rather than simultaneously. **Remove the battery pack and install the power cord after power is restored.**

A



18V AAA Battery Compartment  
(batteries not included)

B



**TEST ALL  
FUNCTIONS**

**Overview**

To ensure proper setup, use remote and test all functions for three (3) seconds.

- Head Up
- Head Down
- Foot Up
- Foot Down
- Head/Foot Up
- Head/Foot Down



