

MIKIT

SAY HELLO TO M65

User Guide

Three Ways of Connecting Devices



Short Press:

Hold **FN** first, then the **corresponding key**, and release both keys.

Long Press:


Hold **FN** first, then the **corresponding key**. Hold for 5 seconds until the indicator starts blinking.

Bluetooth Mode

1 Toggle the keyboard Mode Switch to the wireless side.



2 Short Press FN+Q to make the indicator blink, then Long Press FN+Q to make the indicator flash.

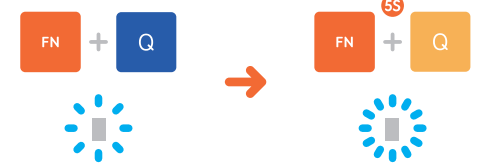

3 Select the pairing device [Mikit M65 BT].



4 The indicator turns off when the keyboard is paired successfully.



*In order to complete the pairing of the keyboard with a second or third new Bluetooth device, repeat the instructions from Step 2 and replace the "FN+Q" with "FN+W" or "FN+E".

2.4GHz Mode

1 Toggle the keyboard Mode Switch to the wireless side.



2 Plug the 2.4GHz receiver into your computer.



3 Press FN+R to enter 2.4GHz connecting mode.



4 The indicator turns off when the keyboard is connected successfully.




*Please find the 2.4GHz receiver inside the package.

Wired Mode

1 Toggle the keyboard Mode Switch to the wired side.



2 Plug the USB cable into your device.

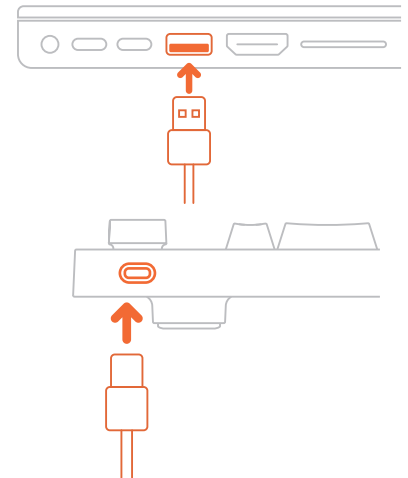


*When being plugged into the computer, the keyboard will start to charge automatically.

*Caution: The rated power for the charger must not exceed 5V=1A. Connection to a higher power output will damage the keyboard.

LED Indicator Status Description



The indicator is located between G and H.



Bluetooth



Blue Light Blinking
Bluetooth Device #1
Re-Connecting



Blue Light Flashing
Bluetooth Device #1
Pairing On



Turquoise Light Blinking
Bluetooth Device #2
Re-Connecting



Turquoise Light Flashing
Bluetooth Device #2
Pairing On



Yellow Light Blinking
Bluetooth Device #3
Re-Connecting



Yellow Light Flashing
Bluetooth Device #3
Pairing On

2.4GHz



Pink Light Blinking
2.4GHz Device
Re-Connecting



Pink Light Flashing
2.4GHz Device
Pairing On

Others



White Light On
CapsLock On



White Light Blinking
Special Keys Combination Enabled



Red Light Blinking
Low Battery Level

Function Keys Combinations

Blue: Short Press
Yellow: Long Press



Switch Between Mac/Windows Layout

Swap CapsLock and Left Ctrl

Backlight On/Off

WinLock

Reset to Default

Battery Level Check
(The LED indicator blinks 1, 2, 3, ...10 times, which stands for 10%, 20%, 30%, ...100% battery level.)

Play/Pause

Previous

Next

Counterclockwise: Vol-
Clockwise: Vol+

Backlight Effects Switching

Backlight Colors Switching

Brightness +

Brightness -

Short Press FN+Right Shift:
For Mac, this will enable Number Row to work as Multimedia Keys, and FN+Number Row to work as Function Keys. Short Press again to disable.

Specifications



Product: Evergreen

Series: M65

Number of Keys: 67

Input: 5V=1A

Battery Specifications: 3.7V 2800mAh

Precautions: See Warranty Card

Manufacturer: Mikit (Shenzhen) Technology Co., Ltd.

A905, Rongchaobin Hai Bldg., Haixiu Rd., Bao'an District, Shenzhen, China

Packing List: Keyboard, Dust Cover, USB Cable, 2.4GHz Receiver, Keycap & Switch Puller, Bluetooth Dongle, Manual, Warranty Card