

# INSTRUCTIONS

## LOCA LED WALL WITH USB CHARGER

8286/3031 8286/3030 8286/3048

Please read the instructions before commencing installation and retain for future reference.

### SPECIFICATIONS:

- **Fitting:** **8286/3031** Painted metal base with aluminum tube + USB Charger  
**8286/3030** Painted metal base with aluminum tube + USB Charger  
**8286/3048** Stainless steel base with aluminum tube + USB Charger
- **Lamp types:** 3W / LED 3000K + OUTPUT5V-1A
- **Protection against electric shock:** CLASS I
- **Ingress Protection:** IP20. Protection against the entry of solid bodies with dimensions of more than 12mm.
- **Ballast:** Includes LED driver
- **Quality/ Corrosive rating:** Suitable for Commercial use, indoor, except in corrosive environments.
- **Ambient temperature range:** -20°C to +40°C.

### INSTALLATION INSTRUCTIONS:

⚠ Electrical products can cause death, injury or damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of compliance is updated.



**CAUTION:** Risk of electric shock

**PLEASE NOTE:** The light source contained on this luminaire shall only be replaced by the manufacturer or the service agent or a similar qualified person.

#### Turn off mains supply.

- Attach the metal bracket on the wall and ensure the electrical cable is threaded through. (Fig.1)
- Connect the fitting to its electrical source (Fig. 2)
  - Brown (Live) - to Brown or Red
  - Blue (Neutral) - to Blue or Black
  - Green/Yellow (Earth) - to Green/Yellow or Copper.
- Screw the base of the fitting on the metal bracket with the cable and power connection inside. (Fig.3)

#### Turn on mains supply.

USB port output: 5V-1A. Use USB cable to charge your adaptive mobile devices. After the charging is finished, disconnect the device from the USB port.

#### WARNING:

- Refer to product labels to confirm the input voltage.
- Confirm the fitting is well installed before operation.
- Check whether the fitting is clean and dry before installation.
- Do not make any modifications to the fitting.
- This product is not suitable for installation in damp or explosive environments.
- Ensure all items and screws are tight.
- Avoid mounting the fitting on a damp surface such as a newly painted or plastered wall as this may cause discoloration of the finish.
- Do not use any chemical or abrasive agents to clean the shade.




Fig. 1




Fig. 2

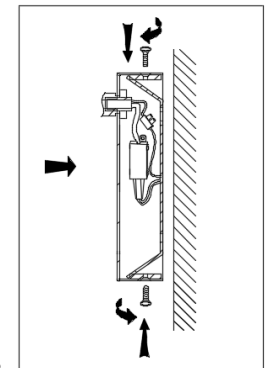


Fig. 3




Fig. 4

**Spazio Lighting (Pty) LTD.**

**JOHANNESBURG OFFICE:** 52 Andries Street | Wynberg/Sandton

**CAPE TOWN OFFICE:** 36 Milner Street | Paarden Eiland

**DURBAN OFFICE:** 31 Solstice Road | Umhlanga Ridge

**011 555 5555** (Central Switchboard) | [info@spazio.co.za](mailto:info@spazio.co.za)