

## 规格参数

机械参数							
LED灯珠	光镜	光杯	工作电压	材质	表面处理	尺寸	重量
冷白6500K	防刮钢化玻璃镜片	电镀铝光杯	2.8-4.2V	AL T6061-T6	硬质氧化	29*21*120mm	78.8g(裸机)
配件	手绳*1、备用O型圈*1,磁吸充电线						
ANSI/NEMA FL1参数							
照明模式							
	极亮	高亮	中亮	低亮			
☀️ 档位亮度	2500~600流明	500流明	150流明	15流明			
🕒 续航时间	1分+2.3小时	4.75小时	14.3小时	145小时			
📏 最大射程	185米						
🎯 最大光强	8556cd						
✅ 放跌落等级	1.5米						
🌧️ 防水等级	IPX8						

注：上述参数只是一个近似值，以1颗3000mah 18650电池在实验环境中测试所得，可能会随着手电，电池和使用环境而发生变化。

## 操作说明

注意：请在使用前拧紧灯头和灯尾再进行后续操作。

1. 开机&关机：按下尾部开关打开手电，再次按下开关关闭手电。
2. 档位调节：在开机状态下轻触尾部开关可以循环切换档位亮度：“极亮-高亮-中亮-低亮”循环，再次按下开关关闭手电，手电会记忆关机时的档位。
3. 爆闪：在开机状态下，两次轻触开关进入爆闪，再次轻触回到之前的档位，单击关闭。
4. SOS：在开机状态下，三次轻触开关进入SOS，再次轻触回到之前的档位，单击关闭。

## 安装方法



拧开尾盖




取出绝缘片(确保18650电池已装入),再拧上尾盖


## 保修条款

1. 30天免费包换：产品自出售之日起30天内,用户在正常使用情况下出现品质问题,则享受免费包换。
2. 5年有限保修：在超过免费包换时间外,公司将提供有偿保修,费用以实际更换材料费用为准。

## 充电功能



在开机的状态下,使用5V的充电设备,将磁吸充电线接入磁吸充电口为手电充电(磁吸线接头显示蓝色表示已通电),充电状态以充电指示灯显示为准,充电中显示红灯,充满显示蓝色。

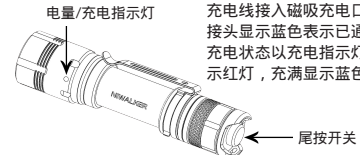


电量/充电指示灯

尾按开关

## 警示

1. 手电亮度高,请勿直视发光体,以免造成视力损伤。
2. 为了保护电池,电路板以及LED灯珠,建议操作极亮模式不要过长。
3. 请远离儿童防止其误食。
4. 请勿使用配套的充电器给其他电子设备充电。

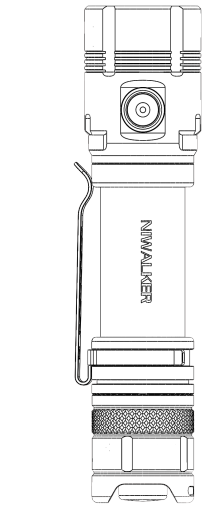

## Ns2 说明书

+86-0769-82050520  
sales@niwalkerlight.com  
niwalkerflashlight  
http://www.niwalkerlight.com  
广东省东莞市樟木头镇百果洞百达工业区艺峰园区



RoHS FC CE

Ns2 is a cost-effective rechargeable outdoor and household flashlight. Utilized 1pc high power LED, it emits 2500lumens max output.

## Specifications

Technical Parameters							
LED	Lens	Reflector	Working Voltage	Material	Surface Finish	Dimension	Weight
High power 6500K	Toughened ultra-clear glass lens	Electroplated AL reflector	2.8-4.2V	AL T6061-T6	hard-anodized	29*21*120mm	78.8g (battery excluded)
Accessories	Spare O-ring *1, Lanyard *1, USB-C cable, holster						
ANSI/NEMA FL1 Parameters							
General Mode							
	Turbo	High	Middle	Low			
☀️ Output	2500~600 lumens	500 lumens	150 lumens	15 lumens			
🕒 Run time	1min+2.3hrs	4.75hrs	14.3hrs	145hrs			
📏 Beam distance	185meters						
🎯 Intensity	8556cd						
✅ Impact Resistance	1.5meters						
🌧️ Waterproof	IPX8						

Notes: The above parameters tested by 1pc 3000mAh 18650 battery are approximate and may vary between lights, batteries and environment.

## Operation


**CAUTION** :Please screw down the light head and tail cap tightly before use.

- **ON/OFF**: When the light is off, click on the tail switch to turn on the flashlight, click again to turn it off.
- **Output selections**: When the light is on, tap the tail switch to cycle through low-mid-high-turbo; it has memory function, it will always remember and be turned on the output which it was turned off last time.
- **Strobe**: When the light is on, double-tap the tail switch to activate strobe, tap again to back to last mode, click the switch to off.
- **SOS**: When the light is on, triple tap the tail switch to activate strobe, tap again to back to last mode, click the switch to off.

## Installation



Unscrew the tail cap




Remove the insulation plate before using


## Warranty

1. 30days free replacement: We will offer free replacement within 30days of purchase if problems develop with normal use.
2. 5-year limited warranty: As to those exceed 30days free replacement time, we will still provide with maintenance service, but the cost of parts will be charged and freight should be paid by customers.

## Charging Function



When the light is on, connect the flashlight to any 5V charging device with magnetic charging cable to charge it (if the magnetic connector is blue, it is powered on). The charging status is subject to the charging indicator light. The red light constant on when charging, and the blue light constant on when charging finished.

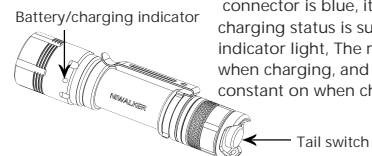


Battery/charging indicator

Tail switch

## Warnings

1. Flashlights are high-intensity lighting devices capable of causing eye damage or other harms, so please avoid shining our light directly into anyone's eyes.
2. Please keep flashlights away from children.
3. To protect the battery, driver circuit and LED, we do NOT recommend you run the light at max mode more than ten minutes.

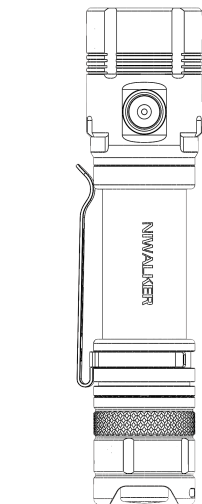

## Ns2 User Manual

+86-0769-82050520  
sales@niwalkerlight.com  
http://www.niwalkerlight.com

Building B, Yifeng industrial park,  
Yifeng road, Baida Industrial Estate,  
Baiguodong, Zhongmutou, Dongguan,

RoHS FC CE