

LEVYS

FINE JEWELRY

EST 1922

RING SIZING GUIDE

Method A: Measure Your Finger

Use a quarter to make sure this page is printed at the correct size.


1. Cut out the ring sizer.
2. Cut a slit for Slot "A".
3. Wrap the sizer around the finger where the ring will be worn. Make sure the numbers are facing out.
4. Pull the pointed end Tab "B" through Slot "A" until the sizer is snug. Make sure to allow size for your knuckle. If your knuckle is size in between the two.
5. The number aligned with Slot "A" is your ring size.
6. If the measurement lands between two numbers, your size is a half size.



Use a quarter to make sure this page is printed at the correct size.

Example: If your measurement falls between 5 and 6, your ring size is 5 1/2.

Sizing Tip: Measure your finger at the beginning of the day to avoid incorrect measurements. More sizing mistakes are made by ordering rings too large rather than too small.

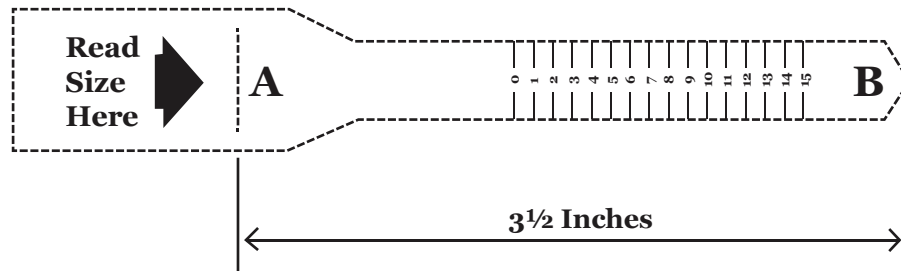

Method B: Measure a Ring that Fits

1. Select a ring that properly fits the intended finger.
2. Place the ring on top of the circle below until the inside edge of the ring matches the outside of the circle.

Comfort Fit Ring Tip: If the ring is a comfort fit design, match circles to the contoured edge of the inner surface of the ring.

Size 4.5 14.8 mm	Size 5 15.6 mm	Size 5.5 16 mm	Size 6 16.45 mm	Size 6.5 16.9 mm	Size 7 17.3 mm	Size 7.5 17.7 mm	Size 8 18.2 mm
Size 8.5 18.6 mm	Size 9 19 mm	Size 9.5 19.4 mm	Size 10 19.9 mm	Size 10.5 20.2 mm	Size 11 20.6 mm	Size 11.5 21 mm	
Size 12 21.4 mm	Size 12.5 21.8 mm	Size 13 22.2 mm					

Sizes & dimensions are approximate.

Make sure your printer is set to 100-percent. Do not reduce the print size in your printer 'page setup' area. You can verify that the ring sizer printed correctly by measuring it with a ruler; it should measure 3 1/2 inches long from "A" to "B".

To open the print dialog box, press CTRL + P for pc or COMMAND + P for mac.