


DOG PROOFER PET DOORS THROUGH-WALL MODEL Product Technical Specifications



INDUSTRY-BEST, NO-HASSLE WARRANTY

**DOG PROOFER PET DOORS ARE MANUFACTURED
BY HALE PET DOORS IN THE USA**

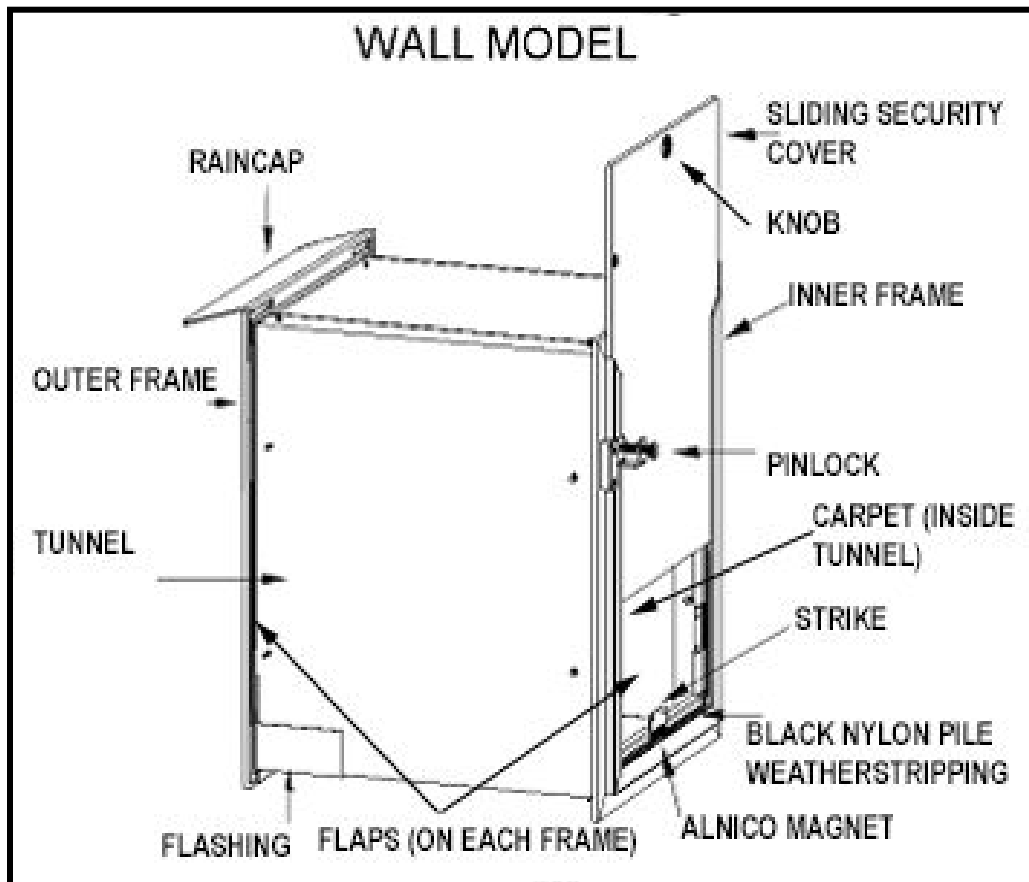

675B S GLASPIE STREET, OXFORD, MI 48371

Help@DogProofer.com | 888-211-0617

The “Wall Model” is an extremely popular model. Its self-framing and self-supporting design makes it easy to install in almost any wall location. No need to frame out the wall. Just cut the tunnel to the wall thickness, slip the outside frame into the tunnel and attach with provided screws. Instructions for installation included in the box or on our website. We offer technical support when needed and [professional installation is available in many locations nationwide.](#)

PRODUCT SPECIFICATIONS:

Flaps: Double flaps (one flap on each wall surface) made of flexible 3/16” clear PVC vinyl.

Inner Frame: Inner frame made of two different metal extrusions. A built-in groove on three sides supports the security cover. (Placement depends on direction cover slides.) Both metals are .063” wall thickness and made of extruded 6063-T5 aluminum.

Outer Frame: Extruded 6063-T5 aluminum with .063” wall thickness. Designed to sleeve into the inside frame.

Flange: The outer frame flange is .070” smaller than the inner frame flange to allow the frame to sleeve together.

Magnets (Alnico5): a ¼” rod magnet 1 ½” long made from an aluminum, nickel and cobalt alloy known for its strength and durability. Metal holders secure magnets into the door frame. Door size determines the number of magnets.

Strikes: Made of ferrous stainless steel. 1 ½” long, ¾” tall and 1/32” thick. U shaped with a center hole for a rivet to securely attach to the flaps.

Weather stripping: Flap is surrounded by ½” nylon pile for maximum insulation. Nylon is woven into a backing 9/32” wide and 1/32” thick.

Tunnel: Pre-assembled .040” aluminum wrapped around and riveted and sealed to the inner flange of the inside frame. Attached to the outer frame at install.

**DOG PROOFER PET DOORS ARE MANUFACTURED
BY HALE PET DOORS IN THE USA**





675B S GLASPIE STREET, OXFORD, MI 48371

Help@DogProofer.com | 888-211-0617

Security Cover: 1/4" thick high-density polyethylene sheet. Extremely shock and impact resistant. Has a 3/8" diameter locking hole and preinstalled knob for easy removal.

Cover Knob: A lightweight zinc alloy cabinet knob pull-type handle in a satin nickel finish that is 25/32" wide, 19/32" tall and 53/64" deep with a 1/2" deep and 21/32" wide finger hole. It is attached to the cover with a 12 mm long zinc-coated steel flat head Phillips screw with a 0.70 thread size that is countersunk to prevent scratching the frame.

Pin Lock: A 1/4" diameter positive action steel pin encased with 5/32" thick fabricated plated steel.

Carpet: 0.12 pile high-quality polyester needle punch, stain, and fade resistant carpet manufactured from post-consumer recycled plastic drinking bottles. Covers both inner walls and inside bottom of the tunnel. Black carpet is supplied with dark bronze door frames and brown carpet is supplied with all other frame colors.

Flashing: Pre-bent .040" aluminum strip added to bottom of tunnel towards the exterior of the wall to make sure that any water that happens to get inside the pet door is shunted to the outside of the wall.

Gap: standard range between door frames is from 1- 9/32" to 2". A dimension larger than 2" would normally be considered a wall unit. Doors can be factory modified to collapse to as small as 3/4" gap.

Raincap: an awning like attachment made of .063" extruded 6063-T5 aluminum. Hooks to the outside frame for use in diverting water and preventing it from entering the pet door from above. It is included as a standard component of the wall model but its use is optional.

**DOG PROOFER PET DOORS ARE MANUFACTURED
BY HALE PET DOORS IN THE USA**





675B S GLASPIE STREET, OXFORD, MI 48371

Help@DogProofer.com | 888-211-0617

PRODUCT VARIATIONS / OPTIONS:

Flaps: flaps covering the pet door are available in the below configurations depending on your specific circumstances:

Training flap: use for a limited time when the pet is timid and getting used to the pet door.

Single flap: designed for installation through interior walls where added insulating factor is not needed.

Frame Colors: Available in four color choices including brushed aluminum, dark bronze, white and Arizona beige which can be mixed to coordinate with interior and exterior colors of the home.

Tunnel: Available in 10" and 16" lengths. Longer tunnels can be custom ordered.

Security Cover Load: Standard top loading. Also available inside the loading model if there is an obstruction above the door.

Security Cover: Can be installed outside, inside, or with dual security covers. Available in four colors to coordinate with our frame colors.

Sizes: 12 standard sizes available from small to giant. **Custom sizing is also available.**

PRODUCT APPLICATIONS:

The "Wall Model" is designed to be installed through almost any wall including but not limited to:

- Brick or double brick walls
- Block walls
- Standard wood or metal stud construction
- Stucco

In addition to being suitable for nearly any wall, the Through Door model can also be used through both interior or exterior walls, whichever suits your specific pet door application.

**DOG PROOFER PET DOORS ARE MANUFACTURED
BY HALE PET DOORS IN THE USA**





675B S GLASPIE STREET, OXFORD, MI 48371

Help@DogProofer.com | 888-211-0617

WE'RE HERE TO HELP

Call or Email for assistance with design, installation or to place an order. We're available 9AM to 5PM Eastern Standard Time, Monday - Friday.

GIVE US A CALL

1-888-211-0617

SEND US AN EMAIL

help@dogproofer.com

FIND AN INSTALLER

[Submit Details](#)



**DOG PROOFER PET DOORS ARE MANUFACTURED
BY HALE PET DOORS IN THE USA**

