

Commercial Series TriTech Motion Detectors

www.boschsecurity.com



BOSCH
Invented for life



- ▶ TriTech - Passive infrared and microwave Doppler radar detection with First Step Processing for superior catch performance and best-in-class false alarm immunity
- ▶ Microwave Noise Adaptive Processing - Avoids false alarms from repetitive sources
- ▶ Integrated EOL resistors - Reduces installation time and complexity
- ▶ Flexible mounting height, no adjustments - Reduces installation time and false alarms, improves catch performance
- ▶ Self-locking enclosure with bi-axial bubble level for faster installation

The Commercial Series TriTech motion detectors are designed to ensure reliable catch performance and false alarm immunity in commercial applications. ISC-CDL1-W15x detectors use a combination of passive infrared (PIR) and microwave Doppler radar detection technologies with advanced signal processing. New features such as integrated, selectable end-of-line resistors, a self-locking enclosure with integrated bubble level, and removable lift gate style terminal strip make installation of Commercial Series detectors easier and more reliable.

Functions

First Step Processing

First Step Processing (FSP) almost instantly responds to intruders without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. The installer can select the sensitivity level, thus improving reliability.

Microwave Noise Adaptive Processing

Microwave Noise Adaptive Processing adjusts to background disturbances, reducing false alarms from repetitive sources without sacrificing intruder detection.

Integrated jumper selectable EOL resistors

The integrated EOL resistors simplify the wiring process and reduce installation time.

Flexible mounting heights

No adjustments required when mounted from 2.3 to 2.75m (7.5 to 9.0 ft). Reduce installation time and false alarms while improving catch performance.

Self-locking enclosure with removable terminal strip

The sliding, self-locking enclosure has an integrated bi-axial bubble level and custom gap-free, lift-gate style terminal strip to make installation easier and more reliable.

Dynamic temperature compensation

The detector intelligently adjusts its sensitivity so that it can identify human intruders at virtually any temperature.

Small animal immunity

The small animal immunity feature reduces false alarms from small animals up to 4.5 kg (10 lbs) that may move on the floor within the coverage area of the detector.

Protected, sealed optics and electronics

The optics and electronics are assembled into the front enclosure and sealed with a protective cover to prevent damage during installation. The sealed optical chamber also prevents drafts and insects from affecting the detector.

Test features

Externally visible alarm LED can be disabled after installation.

Switch configuration

The following functions are selectable using switches:

- Alarm LED On and Off
- PIR sensitivity

Wall-to-wall coverage

A user-selectable integrated lookdown zone and coverage range of 15 m x 15 m (50 ft x 50 ft) provide wall-to-wall coverage.

Certifications and approvals

Region	Certification	
Australia	RCM	
Europe	CE	
	EN50131-1	EN50131-2-4 Grade 2, Environmental Class II
Belgium	INCERT	BEC T 031 (1st edition 2014)
	INCERT	BEC T 031 (1st edition 2014)
Sweden	SBSC	Alarm Class 1/2, Environmental Class II (Larmklass 1/2 miljoklass II)
USA	UL	
	UL	UL 639 - Standard for Intrusion Detection Units
Canada	ULC	CAN/ULC S306-03 - Canadian Standard for Intrusion Detection Units
	ULC	
	IC	Industry Canada
France	AFNOR	NF EN50131-2-4 Grade 2, Environmental Class II + RTC 50131-2-4
Brazil	ANATEL	

Installation/configuration notes

Mounting


The recommended mounting height is 2.3 m to 2.75 m (7.5 ft to 9 ft) with no adjustments required.

Mount the motion detector level, both horizontally and vertically.


The detector can be mounted:

- In a corner by utilizing the beveled edges of the detector base.
- On a flat wall by securing the detector base directly to the wall.
- On a flat wall using the optional B328 Gimbal-mount Bracket, or B335 Swivel-mount Bracket.
- On the ceiling with the optional B338 Ceiling-mount Bracket.

Coverage patterns

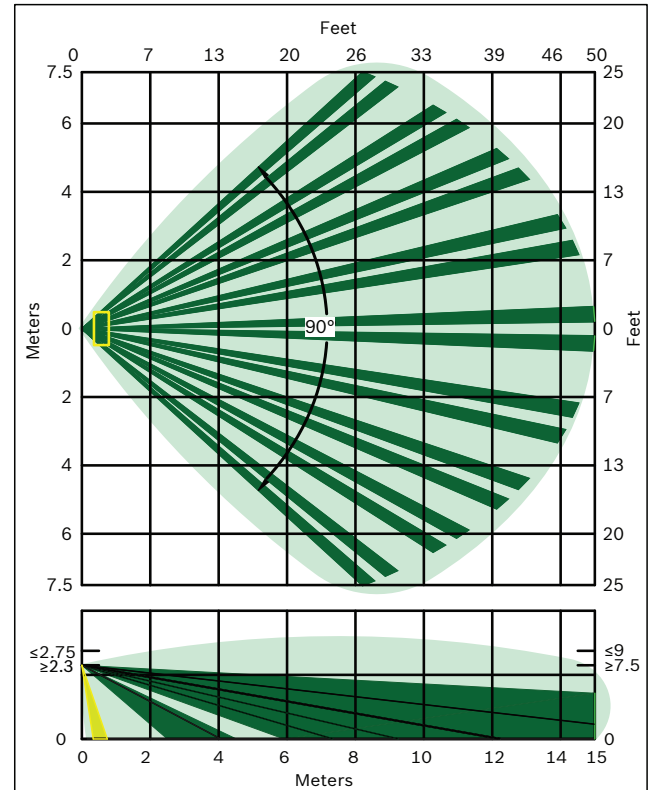

ISC-CDL1-WA15x 15 m x 15 m (50 ft x 50 ft) coverage

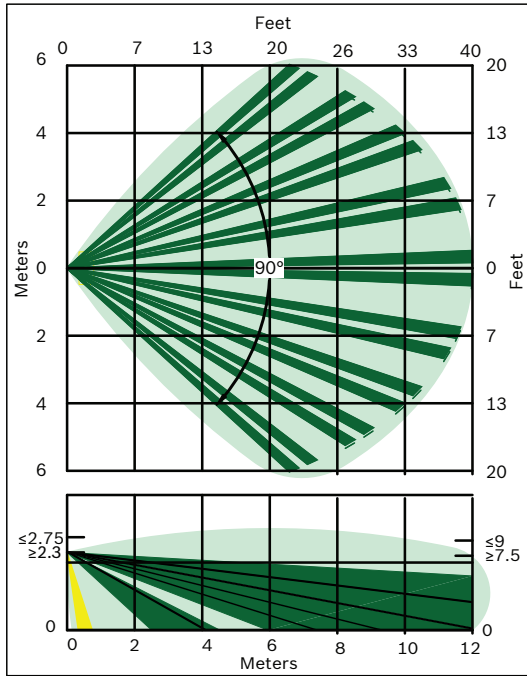

ISC-CDL1-WA12x 12 m x 12 m (40 ft x 40 ft) coverage

Parts included

Quant.	Component
1	Detector
1	Hardware pack <ul style="list-style-type: none"> • 2 jumpers • 2 anchors • 2 screws • 1 cable tie
1	Literature- Installation Guide

Technical specifications

Properties

Dimensions	120 mm x 70 mm x 55 mm (4.7 in. x 2.75 in. x 2.2 in.)
Material	High-impact ABS plastic
Color	White
Terminal wire size	Ø 0.40 mm to 1.29 mm (26 AWG to 16 AWG) (UL: 22 AWG to 16 AWG)

Environmental

Environment	Complies with EN50130-5 Environmental Class II
Relative humidity	93% non-condensing
Temperature (operating)	-30°C to +55°C (-22°F to +130°F) UL: 0°C to +49°C (+32°F to +120°F)

AFNOR/CNPP: -10°C to +55°C

Electrical

Current	Standby = 10 mA (UL : Maximum current = 35 mA)
Voltage (operating)	9 VDC to 15 VDC
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 150 kHz to 2.7 GHz at field strengths less than 10 V/m.

Outputs

Alarm relay, trouble relay	Solid state, supervised, normally-closed (NC) contacts rated for <100 mA, 25 V, 2.5W
Tamper	Supervised, normally-closed (NC) contacts rated for <100 mA, 25 V, 2.5W
End-of-line resistors	Alarm: 1.0 k, 2.2 k Tamper: 1.0 k, 2.2 k, 33 k

Ordering information

ISC-CDL1-W15G Commercial Series TriTech Motion Detector

Provides PIR and microwave Doppler radar detection, 15 m x 15 m (50 ft x 50 ft) coverage pattern. Frequency: 10.525 GHz. Order number **ISC-CDL1-W15G**

ISC-CDL1-W15G-CHI Commercial Series TriTech Motion Detector

Provides PIR and microwave Doppler radar detection, 15 m x 15 m (50 ft x 50 ft) coverage pattern. Frequency: 10.525 GHz. For use in China. Order number **F01U297386**

ISC-CDL1-W15H Commercial Series TriTech Motion Detector

Provides PIR and microwave Doppler radar detection, 15 m x 15 m (50 ft x 50 ft) coverage pattern. Frequency: 10.588 GHz. For use in France and the United Kingdom. Order number **F01U297379**

ISC-CDL1-W15K Commercial Series TriTech Motion Detector

Provides PIR and microwave Doppler radar detection, 15 m x 15 m (50 ft x 50 ft) coverage pattern. Frequency: 9.350 GHz. For use in Germany, Austria, and Switzerland. Order number **F01U297383**

Accessories

B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside. Order number **B328**

B335-3 Swiveling low-profile mount

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

B338 Universal Ceiling-mount Bracket

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

Represented by:

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

Latin America and Caribbean:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com