


SV-1029 Solenoid Valve

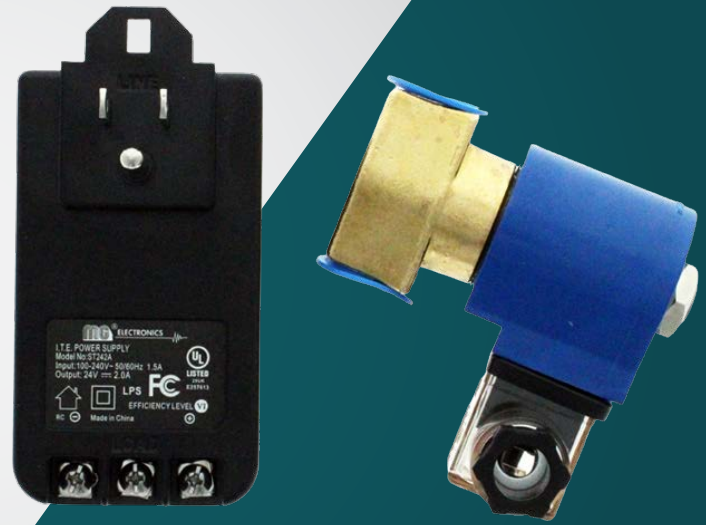

About


The Solenoid Valve (**SV-1029**) is designed to work with multiple CO2Meter Safety Devices and can be directly wired for connection to the safety shut-off valve to shut-off the gas supply in the room or at the tank.

Features

- Food grade valve to insure continuity of supply
- Includes bare wiring for Connection to the CM-7000 Series - CO₂ Multi Sensor System
- Designed to be retrofitted on the supply line out of most cylinders or bulk tanks
- Actuates based on CO₂ Monitor Readings

Works With

- [CM-7000: CO₂ Multi-Sensor System](#)
- [RAD-0102-6: Remote CO₂ Storage Safety Alarm](#)

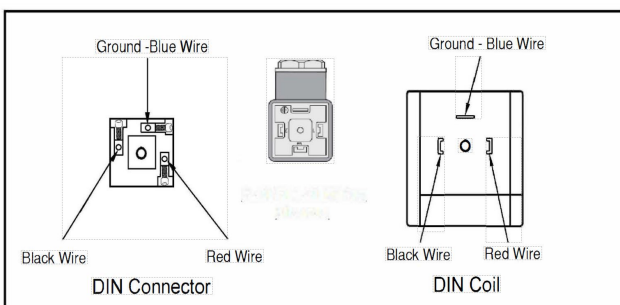

Specifications

- Pipe Size: 3/8 inches
- Orifice Diameter: 1/8 inches
- Minimum Operating Pressure: 0 psi
- Max Operating Pressure: 140 psi
- Coefficient of volume: 0.30
- Body Material: Brass
- Length: 4.63 inches
- Width: 4.25 inches
- Height: 3.25 inches
- NEMA Rating: 4X
- IP Rating: 65
- Standards: UL, CSA
- UL Approved
- 24VDC
- Watts: 10

- **Power Supply Included with SV-1029 purchase**
- **User must wire relays from monitor to valve**
- ***Consider hiring a licensed electrician for both requirements***