



VARMILO

阿米洛机械键盘

Varmilo Mechanical Keyboard

阿米洛Victory 67系列 VYU67 使用手册
Varmilo Victory 67 Series VYU67 User manual

前言

Varmilo音译即为“阿米洛”，取自世界语“Via”、“armilo”。寓意：为您定制的专属装备。阿米洛在保证优良做工的同时，希望能够满足顾客的个性化定制需求。此外阿米洛也坚持在有限的键盘空间内进行创作，试图让用户的桌面更加丰富多彩。

——键盘艺术家·阿米洛


产品特征

全新系列的阿米洛机械键盘均采用阿米洛静电容机械轴或高品质品牌机械轴体，具有稳定的内部结构与触感。

日常保养

先用拔键器拔掉键帽，然后倒置键盘，轻轻拍打键盘背面，将残渣倒出。再用毛刷清理键盘上沾附的残渣、灰尘。若还有残留，用干净的抹布蘸水进行擦拭，直到干净为止。然后放置阴凉通风处晾干。使用过程中，请勿频繁拔插、拉扯、弯折键盘线，容易造成键盘插口处松动或脱落。

布局

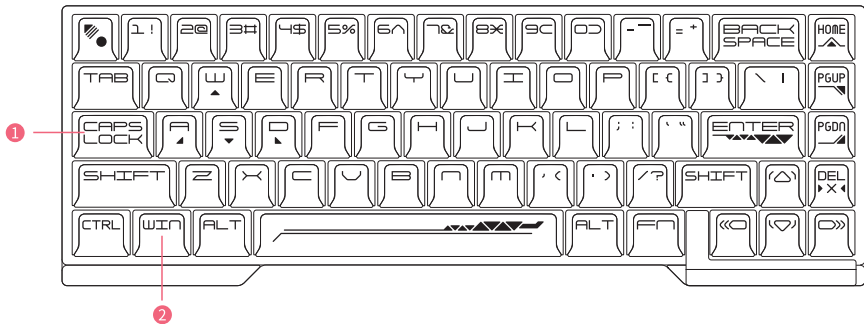

指示灯说明

- ① Caps Lock指示灯:大写时亮白灯,小写时与背光灯同步。
- ② Win指示灯:锁定Win键功能时亮白灯,解锁Win功能时与背光灯同步。
(Fn+Win,锁定/解锁Win键)

注意事项

- 所有Fn组合功能,须按住Fn,再按组合的功能键执行功能。
- 单独按下Fn键时,背光灯会切换成白灯,仅亮起已设置Fn层按键,松开时切换回背光灯灯效。

多媒体功能

按键组合	按键功能	按键组合	按键功能	按键组合	按键功能	按键组合	按键功能
Fn + T	上一曲	Fn + U	下一曲	Fn+Y	开始/暂停	Fn + 1 ~ =	F1~F12
Fn+I	音量关闭	Fn+O	音量减小	Fn+P	音量增大	Fn+Home	Insert
Fn+<	Print Screen	Fn+>	Scroll Lock	Fn+?	Pause/Break	Fn+Del	End

灯光效果

- 按Fn + \ | ,打开或关闭键盘所有灯光。
- 按Fn + “[{” / “}” ,切换可调颜色灯效的上一个/下一个颜色。
- 按FN + R-shift,按灯效顺序循环切换灯效。
- 按Fn + “←” / “→”,减慢/加快当前RGB灯效的动态速度。
- 按Fn + “↓” / “↑”,降低/提高当前RGB灯效的灯效亮度。
- 按Fn + G,打开或关闭键盘前侧氛围灯
- 按Fn + H,前侧氛围灯灯效根据顺序循环切换灯效。
- 按Fn + K,前侧氛围灯亮度根据顺序切换。
- 按Fn + L,前侧氛围灯速度根据顺序切换。

系统模式切换

- 在Mac系统模式下,按Fn + PgUp,Caps Lock指示灯和Win指示灯闪烁三次,切换到Win系统模式。
- 在Win系统模式下,按Fn + PgDn,Caps Lock指示灯和Win指示灯闪烁三次,切换到Mac系统模式。

恢复出厂设置

- 长按Fn + Tab 键三秒, 背光灯闪烁白灯三次,

驱动下载

- 进入阿米洛官网 (<https://varmilo.cn>) 在技术支持中搜索型号, 或者在驱动选项下按型号查找。

驱动功能介绍

- 按键设置: 可将键值设置为其他按键, 宏定义, 快捷方式。
- 灯效设置: 切换灯效, 修改灯光颜色, 自定义灯效。
- 宏 设 置: 整理, 录制自定义宏。
- 延迟调节: 调节键盘的反应速度。
- 磁轴行程自定义: 自定义轴体行程, 支持0.1-4mm 40段调节。
- 快速响应功能 (RT功能): 最低支持0.1mm精确识别。
- 高级键功能: DKS, MT, TGL等进阶组合键功能

Varmilo阿米洛保修信息

- 阿米洛全系列键盘/外设在售出后, 会提供给消费者商一年质保服务(配件类为三个月质保服务)。
- 保修期限内以此卡与产品购买日期为依据, 请您妥善保管, 遗失不予补发。若遗失此卡, 您仍可以依购买凭据(发票, 小票)与电商购买信息作为保修依据。
- 免费质保服务仅适用于正常使用下非人为所发生的质量问题, 若产品因人为因素或不可抗力造成破坏, 则无法享受免费质保服务。其中人为因素包括擅自拆解, 外力损伤(撞击, 刮擦等), 进液体(饮料, 水等), 移除产品本身的序列号或保修贴纸等; 不可抗力包含受洪水、受潮、啮齿动物损坏等自然灾害造成的损害。
- 外壳有印制图案的产品款式请避免用酒精擦拭清理, 可使用清水或无酒精洗涤用品清洁。

维修须知

- 保修期内您可以享受免费质保服务, 保修期外阿米洛仍提供付费维修服务。
- 阿米洛外设产品支持全国联保(仅支持中国大陆地区), 您可以联系您购买产品的电商店铺或线下门店进行保修, 也可登录阿米洛官方网站(<https://varmilo.cn>)进行保修。

Preface

Varmilo comes from Esperanto 'Via' 'armilo', which means the unique keyboard customized for you. We were born to meet customer's personality and variety as well as keep good craftsmanship and stable quality. Varmilo is aiming at beautifying your desk setup by the endless improvement and boundless innovation!

--By keyboard artist Varmilo


Product Feature

The brand-new Varmilo mechanical keyboard series adopt the Chery MX switches from Germany with stable internal structures and tactility.

Daily Maintenance

To clean a keyboard, pull out the keycaps using a key puller, put the keyboard upside down, pat the back of the keyboard to pour out impurity, and brush off the impurity and dust that are adhered to the keys. If residuals exist, wipe them off using a clean cloth with some alcohol. After that, dry the keyboard in a cool and ventilated place. To avoid a loose or fallen USB port, do not frequently plug,unplug, drag or bend a keyboard cable.

Layout

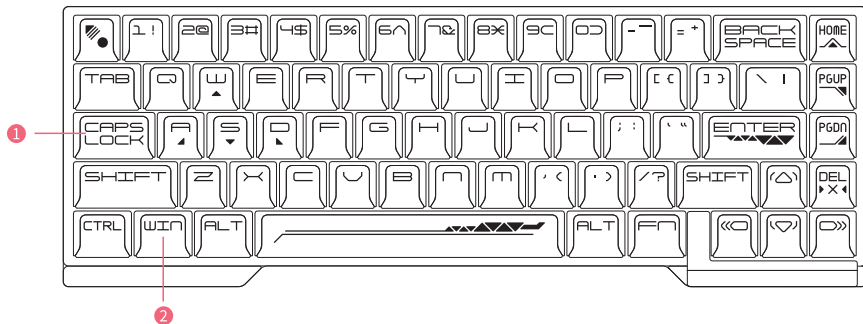

Indicator light description

- ① Caps Lock indicator: White light on when capitalized, back to the normal backlight when Lower case.
- ② Win indicator: When you lock the Win button, the white indicator lights on. When you unlock the Win button, back to the normal backlight.
(Fn+Win, lock Win key or /unlock Win key) 8

Notes

- For all Fn combination functions: Long-press the Fn key, then press the combined function key to trigger the combination keys function.
- Individually press the Fn key, and the backlight will switch to white light, but only the Fn layer keys that have been set will turn on white light. When the Fn key has been released, the backlight will go back to the normal backlight effect.

Multimedia Function

Combinations	Functions	Combinations	Functions	Combinations	Functions	Combinations	Functions
Fn + T	Last Song	Fn + U	Next Song	Fn+Y	Play/Pause	Fn + 1 ~ =	F1~F12
Fn+I	Vol Down	Fn+O	Vol Up	Fn+P	Vol Off	Fn+Home	Insert
Fn+<	Print Screen	Fn+>	Scroll Lock	Fn+?	Pause/Break	Fn+Del	End

Lighting effect

- Press Fn + "\|" to turn on or turn off all keyboard lights.
- Press Fn + "[{" or "}" to switch the color light effect to the last one or next one.
- Press FN + "Right-shift" to switch different light effect.
- Press Fn + "←" or "→" to slow down or speed up the dynamic speed of the backlight effect.
- Press Fn + "↓" or "↑" to reduce or increase the brightness of the backlight effect.
- Press Fn + G to turn on or off the backlight in front of the keyboard.
- Press Fn + H, switch the backlight effect in the front of keyboard rotated according to the sequence.
- Press Fn + K, switch the lighting degree of backlight in front of keyboard.
- Press Fn + L, switch the speed of backlight in front of keyboard.

System mode switching

- In Mac system mode, press Fn + PgUp, and the Caps Lock indicator and Win indicator blink three times to switch to Win system mode.
- In Win system mode, press Fn + PgDn, and the Caps Lock indicator and Win indicator blink three times to switch to Mac system mode.

Factory Data Reset

Restore the factory setting: Fn + D long press for 3 seconds, backlight white light flashing for three times, restore the factory successfully.

Driver Download

· In Varmilo website (<https://varmilo.com>), select Technical Support, search the model number in the search bar, or choose the Driver button to look for the corresponding model driver.

Driver function introduction

- Key Settings: Any keys can be set to other keys, macro definitions, shortcuts.
- Backlight effect Settings: switch the light effect, switch the light color, and customize the light effect.
- Macro setup: Organize and record custom macros keys function.
- Delay adjustment: Adjust the keyboard response speed.
- Magnetic switch stroke travel customization: customized switch stroke travel, support 0.1-4mm 40 section adjustment.
- RT function: The fastest trigger is 0.1mm travel with accurate recognition.
- Advanced key function: DKS, MT, TGL and other advanced key combination function.

Varmilo Warranty Service Information

- Varmilo provides one year free warranty service for keyboards and three months for accessories from the date of order receipt.
- The warranty period is based on this card and the date of purchase. Please keep it properly. If you lose this card, you can still use the purchase voucher (invoice, receipt) and the purchase information of e-commerce as the warranty basis.
- Free warranty service is only applicable to non-human quality problems in normal use. If the product is damaged due to human factors or force majeure, the free warranty service cannot be provided. Human factors include external damage (impact, scraping, etc.), liquid (water, beverage, etc.), unauthorized disassembling, removing the serial number or warranty sticker of the product itself, etc. Force majeure includes the damage caused by flood, dampness, rodent damage and other natural disasters.
- For products with printed patterns on the cases, please avoid wiping with alcohol and use clean water or alcohol-free cleaning products.

Maintenance Instructions

- During the warranty period, you can enjoy the free warranty service. If exceeded free warranty period, Varmilo will still provide paid maintenance service.
- Customers could ask for warranty service from where you purchased the products, or contact support@zhihaihe.cn for further assistan.



Official Website



Weibo



Wechat



Instagram



Twitter



Support(Chinese)



Support(English)



扫码即可了解有关阿米洛产品的最新信息。

Scan the QR code for more detailed and update news of Varmilo.



VARMILO

志海和营销(深圳)有限公司

ZhiHaiHe Marketing(ShenZhen) Co.,Ltd

电话TEL:+86-755-2644 4451

传真FAX:+86-755-2644 4428

官网WEB:keyboard.varmilo.com

地址ADD:中国广东省深圳市光明区玉塘街道田寮社区第十工业区 3 栋 202
Rm202, 2nd Floor, Block 3, 10th Industrial Zone, Tianliao Community,
Yutang Street, Guangming District, Shenzhen, China