


The ENFORCER Siren/Strobes are multi-purpose devices: siren, speaker, and optional strobe (SH-816S-SQ only). It can serve as a regular siren, but also has an audio input that can be used to playback audio or broadcast messages. The SH-816S-SQ series also includes a strobe light with a choice of amber, blue, clear, or red lenses and can be surface installed or to a standard single gang, double gang or C-type back box.

Features

- Weatherproof for outdoor/indoor use, IP65
- 9~15 VDC and low current draw
- 120dB Warble-tone siren
- 25W Speaker for audio
- Built-in tamper alarm output
- Mount directly to wall or to most common back boxes

Works With

- CM-900 | Industrial Gas Detector
- RAD-0102-6 | Remote CO₂ Storage Safety 3 Alarm
- RAD-0002-ZR I Oxygen Deficiency Safety Alarm

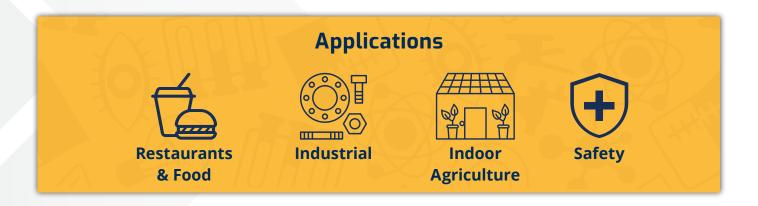

TECHNICAL DATA

SELF CONTAINED SIREN/STROBE

The Enforcer

Туре	Siren with Strobe
Operating Voltage	9~15 VDC
Maximum Current Draw	870mA@12VDC
Siren Volume	120dB
Speaker Rating	25W Peak
Strobe Flash Rate	100 Per Minute
Tamper Outpup	100mA@30 VAC/VDC
IP Rating	IP65
Operating Humidity	0-95%
Operating Temperature	-4°~131° F (-20°-55°C)
Housing Material	White Polycarbonate Plastic
Dimensions	6 1/8" x 7" x 4 1/2" (155mm x 178mm x 155mm)
Weight	2 lb 2 oz (957g)









