

Indoor Infrared Sauna User Manual



Available for HY-MINI

Installation Procedure

Fasten by buckle



1, Floor Panel



2, Rear Panel



3, Left Panel



4, Bench Support



5, Right Panel



Connect the wires to sockets



6, Bench Panel



7, Front Panel



8, Top Panel



Fix screws via drilled holes
Connect wires on roof



9, Door Handle

After finish all installations and assure all functions well,
fix the dust-proof cover.





3.5cm 1.6cm

Screws 1.6cm x 6pcs, assemble the dust-proof cover.

Screws 3.5cm x 8pcs, fix the ceiling with rear, side, front panels.




Operation Instructions of Control Panel

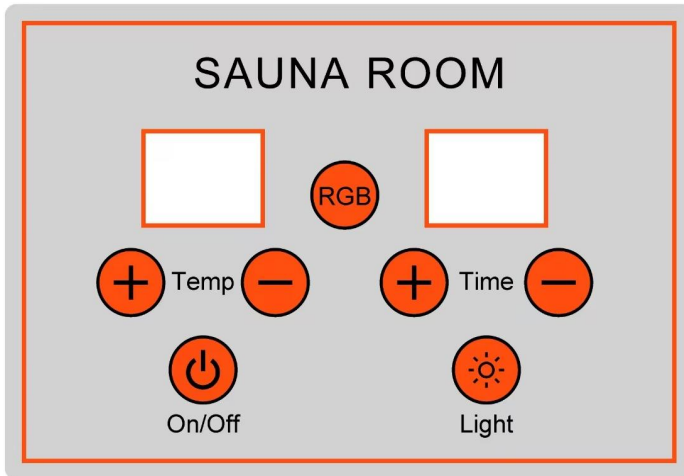

Power Button (On/Off)

This button turns the sauna on or off.



Light Button (On/Off)

This button turns the LED spot lights on or off if there is.



Temperature Setting

Press  or  button to increase or decrease the

sauna temperature. The heaters will turn off when the sauna reaches its desired temperature.

Temperature setting ranges from 64 to 149°F. Press **Light Button** 3 seconds to switch °F to °C.



Timer Setting

Press  or  button to increase or decrease the

sauna timer. It will count down until 00 and shut down the heaters.

Tips: Time setting ranges from 1 to 99 minutes.



RGB light Button

Press this button to switch RGB light.

Tips: The RGB light has 10 colors. One press to switch one color. The 11th press switches to auto mode, the 12th press switches off the RGB light.

Blue-tooth function: Source SAUNA BT on your mobile phone or other devices with Blue-tooth function, connect with it when the sauna turns on, then you can play music etc. via blue-tooth. To adjust volume, change playing turns, pause or stop via your mobile phone.

Trouble shooting

Error code E0: The temperature sensor doesn't connect well, connect it again.

Error code E1: There is a short circuit, replace a new temperature sensor or circuit board.

For more troubleshooting advice or to report a problem, please contact with your supplier.