

LCD-1 Wall Mount Kit

Fitting Check-List

①




x5

②




x1

Dimensions

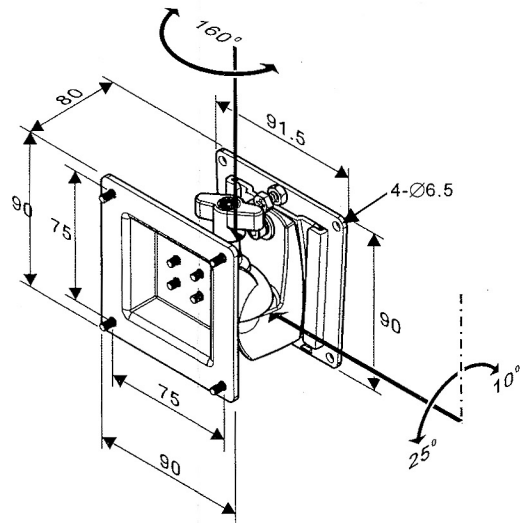

Unit:mm

Assembly Guide




4- \varnothing 6.5

Secure wall mount plate firmly to the wall with four expansion screws (not supplied).

Note:

- * Wall should be solid and with sufficient space for wall-mount plate.
- * Proper expansion screws for wall-mounting (Plate screw holes dia.6.5mm)

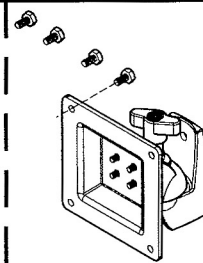


Check your panel first to which VESA standard interface it supports before assembling. (75x75mm VESA standard interface)


Secure the arm to the rear of the Lcd panel with 4 screws.

Note:


- * Standard product fit VESA interface 75X75mm, if need VESA interface plate 100X100mm, please consult with the store you purchased.

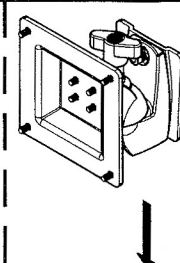

Insert the arm (with LCD monitor on already) into the wall mount plate and press it down.

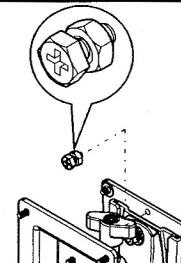

Secure the nut to the screw about 3-5 circles (as figure). Clockwise direction locks it into wall mount plate. Then secure the nut counterclockwise to the wall mount plate (avoiding the arm falls off).



When the joint loosens, tighten the parallel knob up with clockwise direction. Loading weight : 1 ~ 6 kgs.

Note:

- * Support the monitor during the adjustment procedure.