



CONTENTS


Kazimir Sconce

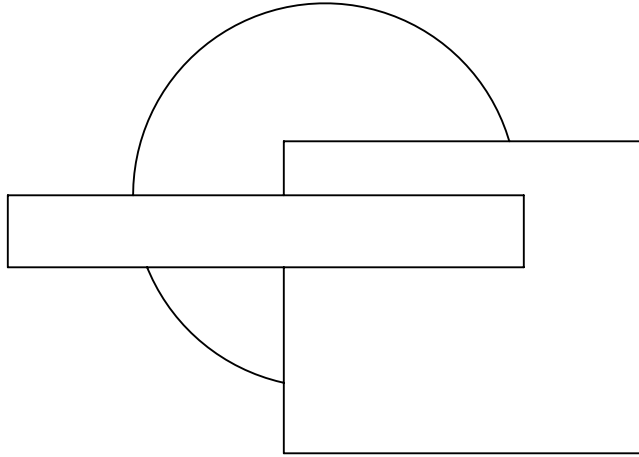


Crossbar



Hex Driver



(x2) J-Box Screws



Driver with Wago Connectors



SAFETY INFORMATION

Only suitable for direct mounting on non-combustible surfaces.
Under no circumstances can Kazimir fixtures be mounted on normally flammable surfaces.
Suitable for dry, indoor use only.
Maximum ambient temperatures: 25° C

KAZIMIR SCONCE | WALL INSTALLATION

Note: Please contact a licensed electrician.

Note: Ensure power is off during installation

1. Using provided hex driver, loosen set screws (A) on top and bottom to release crossbar (B).
2. Make wiring connections from wall to driver input and place driver into J-Box. Pull the driver output wires through the center hole of the crossbar (B), leaving the driver inside of the J-Box.
3. Secure crossbar (B) to J-Box in desired orientation using provided 8-32 J-Box screws. Keep in mind that the fixture (C) will be rotated depending on how the crossbar is mounted.
4. Make wiring connections from driver output to fixture (C) and feed excess wire back through center hole of crossbar (B) and into J-Box.
5. Place fixture (C) onto crossbar (B) so that the grooves in the fixture backplate align with the flanges of the crossbar.
6. Using provided hex driver, thread set screws (A) on top and bottom so that they re-enter the holes of the crossbar (B) and hold the fixture (C) in place.

