FITTING DIAGRAM

FORD XR5 V3: FRONT BOLT-ON INSTRUCTIONS


INSTALLATION AND FITTING SERVICES

If you are having any difficulties please seek professional advice from the listed International and Domestic Authorised Dealers on our website.

www.flowdesignsaustralia.com


CONFIGURATION 1

FRONT EXTENSIONS ONLY

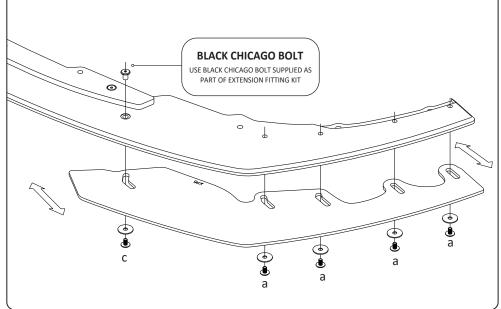

- Insert bolts loosely into allocated brass thread locations.
- Slide extensions in and out to your liking.
- Use a 4mm hex key to hand tighten.

PLEASE NOTE : DO NOT OVERTIGHTEN - These bolts do not need to be very tight.

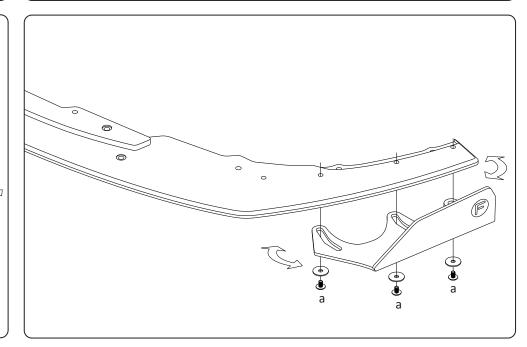


- Insert bolts loosely into allocated brass thread locations.
- Slide and pivot winglets to your liking.

CONFIGURATION 2


FRONT WINGLETS ONLY

Use a 4mm hex key to hand tighten.

PLEASE NOTE : DO NOT OVERTIGHTEN - These bolts do not need to be very tight.

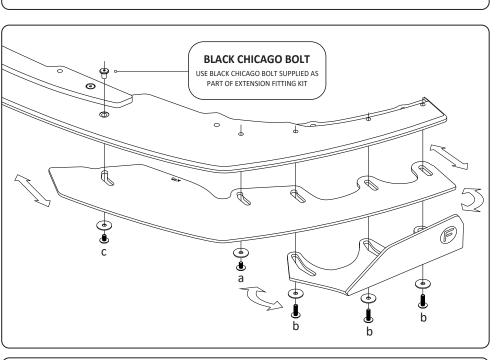

PLEASE NOTE : DO **NOT** OVERTIGHTEN - These bolts do not need to be very tight.

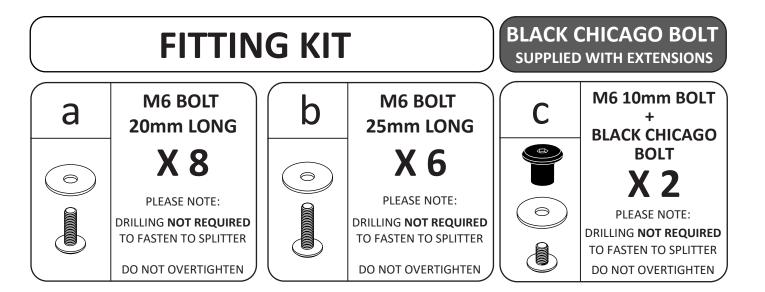



HAND TIGHTEN ONLY



BUMPER REMOVAL NOT REQUIRED

CONFIGURATION 3 FRONT EXTENSIONS AND WINGLETS

 Insert bolts loosely into allocated brass thread locations. Slide and pivot extensions and winglets to your liking. • Use a 4mm hex key to hand tighten.









FERMS AND CONDITIONS: MISUSE OF GOOD