FITTING DIAGRAM

HONDA CIVIC RS HATCH FK4/7 FACELIFT: REAR DIFFUSER

INSTALLATION AND FITTING SERVICES

If you are having any difficulties please seek professional advice from the listed International and Domestic Authorised Dealers on our website.

www.flowdesignsaustralia.com


BUMPER REMOVAL NOT REQUIRED


HANDY HINTS

- Remove clips for OEM holes prior to installing diffuser.
- Mount rear diffuser using bolts (a.), then using the rear diffuser as a guide, drill holes for bolts (b.)

(R3)


HANDY HINTS






- · Align FLOW-LOCK Fins to their corresponding slots.
- Please ensure to allocate the correct FLOW-LOCK Fin to the correct corresponding slot (A into A slot, B into B slot etc.)
- Ensure textured side of fin is facing out from opposing fin
- Push fin firmly into the slots until a clicking sound is heard.
- Check both top and bottom locking tabs have securely seated.

Please Note: Once fins have been locked into position, they will be difficult to remove.

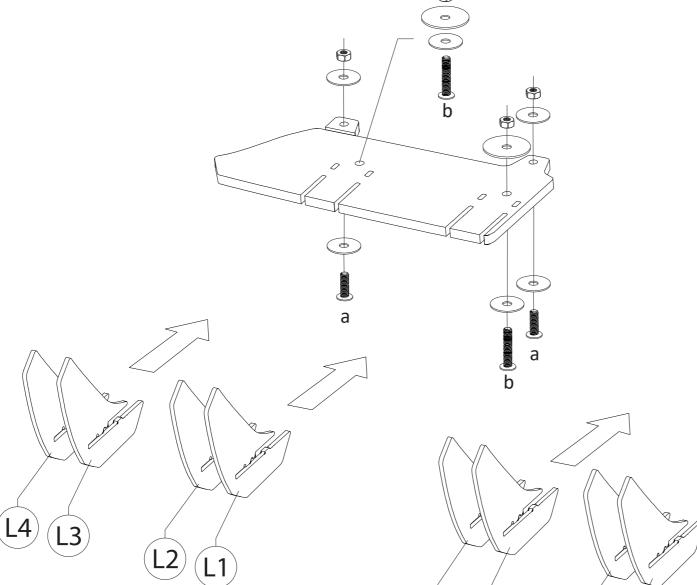

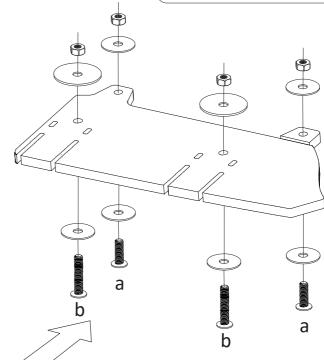

FITTING KIT

a

0

M6 BOLT 30mm LONG

X4

PLEASE NOTE: DRILLING NOT REQUIRED TO FASTEN TO BUMPER

b

X4

PLEASE NOTE: DRILLING **REQUIRED** TO FASTEN TO BUMPER PLEASE USE 8mm DRILL BIT

M6 BOLT 40mm LONG

> For correct fitment, install all fins onto rear diffuser before fastening to rear bumper

HANDY HINTS















