FITTING DIAGRAM

KIA BD CERATO GT PFL HATCH / SEDAN : FRONT BOLT-ON INSTRUCTIONS

INSTALLATION AND FITTING SERVICES

If you are having any difficulties please seek professional advice from the listed International and Domestic Authorised Dealers on our website.

www.flowdesignsaustralia.com

BUMPER REMOVAL NOT REQUIRED


CONFIGURATION 1

FRONT EXTENSIONS ONLY

BLACK CHICAGO BOLT USE BLACK CHICAGO BOLT SUPPLIED AS PART OF EXTENSION FITTING KIT

CONFIGURATION 2

FRONT WINGLETS ONLY

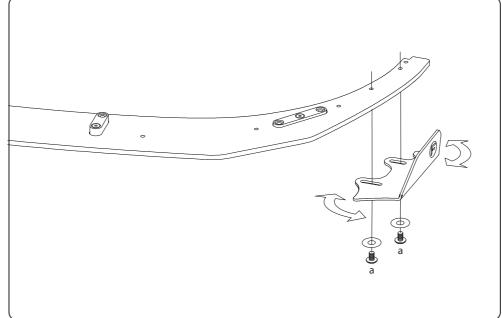



FRONT EXTENSIONS AND WINGLETS

- Insert bolts loosely into allocated brass thread locations.
- · Slide extensions in and out to your liking.
- Use a 4mm hex key to hand tighten.

PLEASE NOTE: DO NOT OVERTIGHTEN - These bolts do not need to be very tight.

- Insert bolts loosely into allocated brass thread locations.
- Slide and pivot winglets to your liking.
- Use a 4mm hex key to hand tighten.

PLEASE NOTE: DO NOT OVERTIGHTEN - These bolts do not need to be very tight.

- Insert bolts loosely into allocated brass thread locations.
- Slide and pivot extensions and winglets to your liking.
- · Use a 4mm hex key to hand tighten.

PLEASE NOTE: DO **NOT** OVERTIGHTEN - These bolts do not need to be very tight.


FITTING KIT

a M6 BOLT 10mm LONG

PLEASE NOTE:
DRILLING NOT REQUIRED
TO FASTEN TO SPLITTER
DO NOT OVERTIGHTEN



PLEASE NOTE:
DRILLING NOT REQUIRED
TO FASTEN TO SPLITTER
DO NOT OVERTIGHTEN



DO NOT OVERTIGHTEN

BLACK CHICAGO BOLT



