



LeonLite | LITE^{edge}

4.5W Smart Low Voltage Garden Light

Quick Start Guide
Guide de démarrage rapide
Guía de inicio rápido

*HUB REQUIRED

DOWNLOAD LITEEDGE APP



NOTE // Allow Access to Bluetooth



BLUETOOTH CONNECTIVITY IS REQUIRED

Please **ALLOW** LITEedge app to use the Bluetooth. This will allow LITEedge app to find and connect to certain smart light.

PRODUCT FEATURES



BLUETOOTH



COLOR CHANGING



ADJUSTABLE COLOR TEMP



HUB REQUIRED FOR CONTROL VIA INTERNET



AC/DC 12-24V ONLY



IP65 WATERPROOF



0-12 CHILDREN WARNING



ELECTRICIAN REQUIRED

WARNING & DISCLAIMER


Proper setup of this device requires blinking lights. Please take precautions during the activation process, and avoid direct eye contact with or placing a cover over the light until successful pairing is complete to prevent potential discomfort or photosensitive seizure.

MULTIPLE LIGHTS PAIRING AND CONNECTION Method 1




Connection distance:
Max. 50 ft (without block)

Pairing distance:
as close as possible




Max. 50 ft
(without block)




4 OR MORE


1 Register and login.




2 To set the lights to pairing mode, simply turn them OFF-ON five times and watch as they begin blinking.




3 Press "+" while the lights are still in pairing mode (blinking).




4 Press "Go to add" button.




5 Select the lights and press "+".



6 Connecting...




7 Press "Done" button.




Pop-up window


8 Successfully added.




✓ Success.

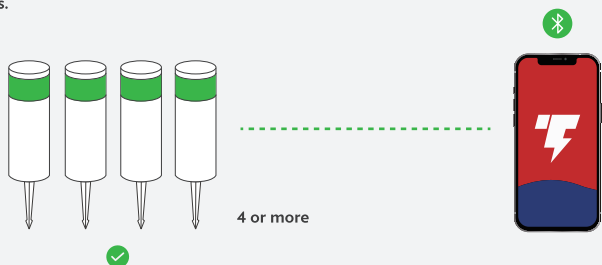

3 Press "+" while the lights are still in pairing mode (blinking).



4 Press "Do not add" button.




Pop-out windows


5 Press the "Path Lights" icon.




6 Press "Yes" and the "Next" button.




7 Press "Add All".



8 Press "Next" button.



✓ Success.

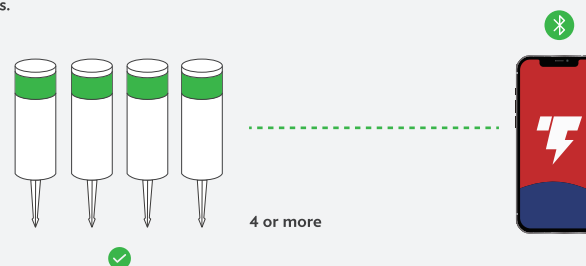


MULTIPLE LIGHTS PAIRING AND CONNECTION Method 2



Connection distance:
Max. 50 ft (without block)

Pairing distance:
as close as possible




Max. 50 ft
(without block)




4 OR MORE

1 Register and login.




2 To set the lights to pairing mode, simply turn them OFF-ON five times and watch as they begin blinking.




TROUBLESHOOTING

Time-Out During Multiple Lights Pairing


- Some lights fail to connect due to time-out when connecting multiple lights.

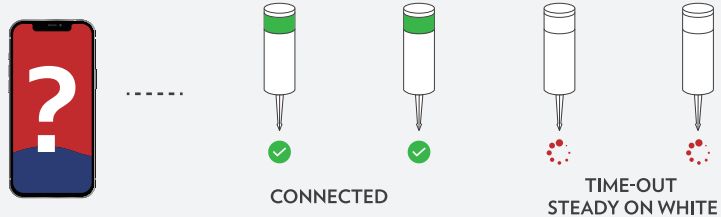

- To reset the time-out light(s), toggle the light(s) OFF and then ON again.

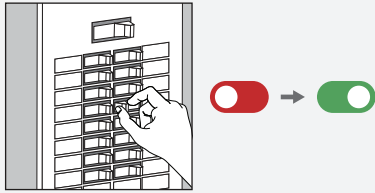


- Now pair the remaining lights with LITEdge App and further illuminate your space!

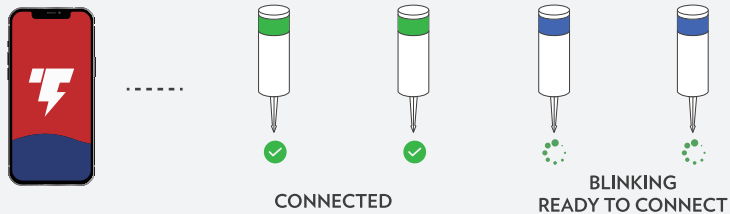

FEATURE


Group-Control Multiple Lights

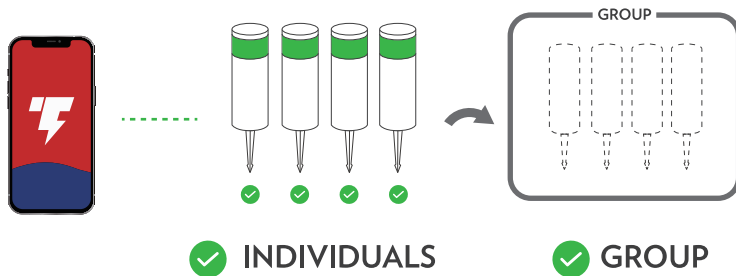


- Tap "∟".




- Create a group.



- Select the lights that you'd like to add to the group.




- Success.

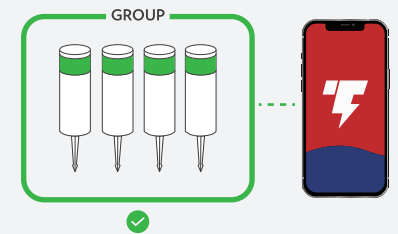

TROUBLESHOOTING


One of All Lights Lost the Connection

- If one of the lights in your group is disconnected, there are steps you can take to easily re-establish connection.

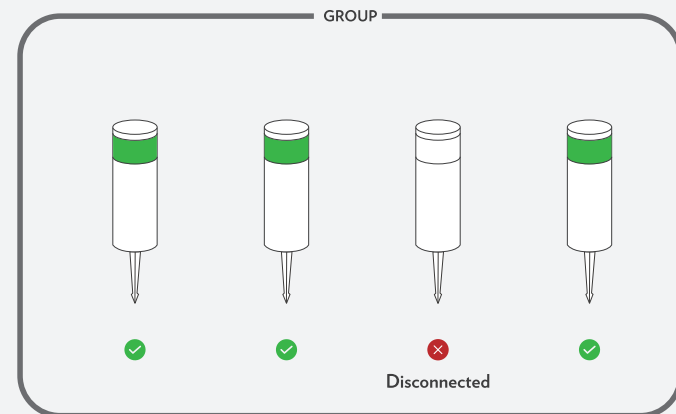


Method 1: Reset and pair the disconnected light individually (efficient but may require professional knowledge).


1 Turn off the main power/switch.

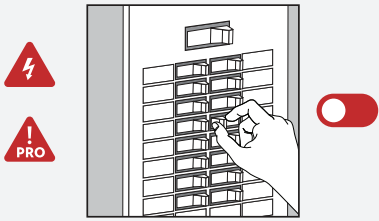

2 Remove the disconnected light from the system.

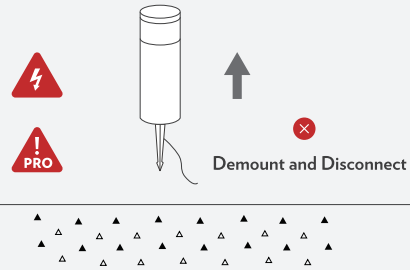


3 Power on the light individually, reset, and connect.




Blinking (Reset: ON-OFF 5 times, then ON)


4 Mount it back.

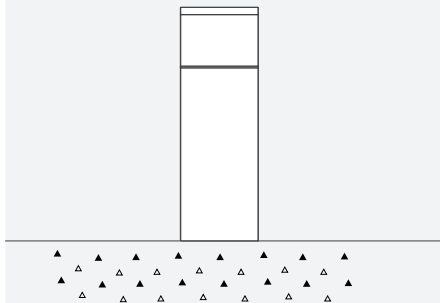

5 Add the light back to the existing group.

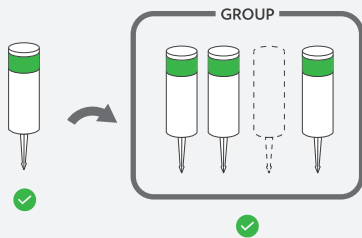


Success.




Method 2: Reset and pair the whole system (easy but maybe time-consuming).


1 Reset by main switch.




2 Reset all lights (ON-OFF x 5, then ON)




3 Pair all lights.

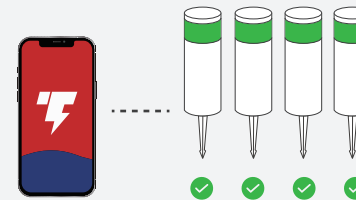

4 Create a group/Add to a group (If necessary).

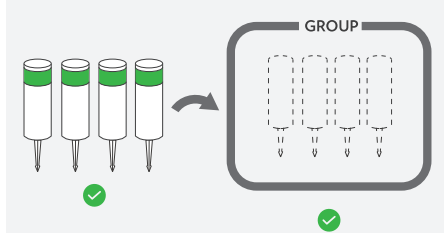

Success.

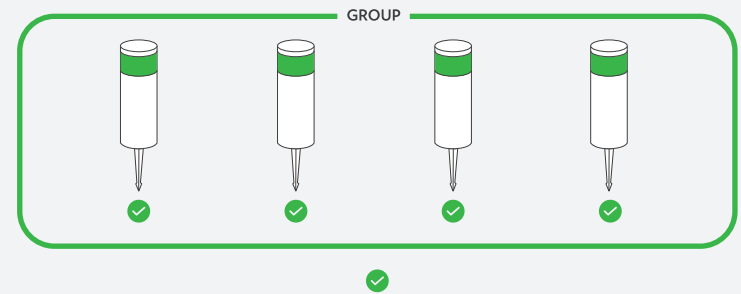

01 / FREQUENTLY ASKED QUESTIONS

1. How can I share my devices with other users?

To share your LITEdge smart devices, follow these steps:

- (1) Open the LITEdge App and tap the "Me" icon at the bottom right corner.
- (2) Select "Home Setting" and choose the home you want to share.
- (3) Select "Add Member" and add other users by entering their LITEdge account details or sending an invitation by text message or email.

NOTE: The maximum range of the Bluetooth connection is 50ft.

2. How can I group multiple devices together?

- (1) If you are using the Alexa or Google Home App, follow their "Add to home" process to link your LITEdge smart devices to your smart speaker and create a room to group them. NOTE: This light requires a smart hub to work with a smart speaker.
- (2) If you are using the LITEdge App, tap the device icon, select "Create Group," and add your preferred devices to a group to control them all together.

3. How many devices can I control?

Our App can control an unlimited number of devices, but make sure at least one of these lights is within Bluetooth connection range, which has a maximum range of 50ft, and the maximum distance between two lights is 50ft.

4. How can I rename my device?

To rename your device, tap the device from your main device list, select the "pencil" icon beside the default device name, and enter a new name.

5. What should I do if the device is offline or disconnected?

If a device is offline or disconnected, try unpairing and pairing the device again first, making sure that Bluetooth access is allowed and at least one of these devices is within Bluetooth connection range. If that doesn't work, feel free to call us at +1 800-990-7688, and we will provide you with help.

6. How can I remove a device?

To remove a device, select the device from your main device list, Tap the "pencil" icon and choose "Remove Device" and wait for the LED indicator to blink. NOTE: REMOVING THE DEVICE WILL ERASE THE CONNECTION SETTINGS, AND YOU MAY NEED TO PAIR IT AGAIN TO RECONNECT.

02 / TROUBLESHOOTING

1. Having trouble connecting to Bluetooth?

Make sure you've allowed access to Bluetooth and that at least one of these lights is within Bluetooth connection range.

2. Do I need a hub?

A smart hub is required if you want to use the light with a smart speaker.

Need further assistance? We're here to help! Please visit <https://www.leonlite.com/contact> or call +1 (800) 990-7688.

LeonLite Product innovation has always been a critical driver of LEONLITE's business. In a highly competitive industry, we constantly strive to develop new products that offer homeowners unique advantages in terms of style, installation, and energy efficiency. In addition, our products meet the industry's strictest safety and performance standards to ensure product quality.



TORCHSTAR CORP

LeonLite

LITEdge

3768 Milliken Ave, Suit A
Eastvale, CA 91752

Questions or Comments

1-800-990-7688

info@leonlite.com

www.leonlite.com

© 2022 TORCHSTAR CORP

All rights reserved