

This system includes: TAVD-4000H Amplifier, TP1000 4 channel Encoder/Mux/Modulator

Note: Other configurations available:

- TP1800 Transmodulator 4-8VSB In,
   1 Agile 8VSB Output
- TM900 Agile Adaptive Digital Modulator ATSC 1.0/3.0
- TM500 Low-Cost Digital Modulator



# 4000-watt VHF Digital Transmitter

- 4 channels (2HD/2SD or 1HD/3SD) 8VSB RF output
- PSIP/PSI descriptors generator/injector with VCT
- Remultiplexer with PID editor, ASI injection, remap, restamp, grooming, and add-drop
- MPEG2/MPEG4 video encoding
- Full color touchscreen display, with Ethernet and SNMP
- Internal RF isolator, efficient switching power supply
- EAS input and control through GPI or SNMP
- Dynamic PSIP input from any external EIT EPG generator
- Excellent video quality and lower bitrates through triple pass video motion estimation
- 2 Year Warranty on Amplifier
- 1 Year Warranty on Modulator
- ATSC 3.0 Available on Select Modulators

## **RF CHARACTERISTICS**

Frequency Range Modulator: 50 – 860 MHz RF Input

55 - 858 MHz RF Output (band center)

Amplifier: 174 – 216 MHz (VHF Band III)

Frequency Step Size 12.5 kHz

Input Power 0 dBm (nominal) into power amplifier from translator

Transmitter Output Power4000W (other levels available upon request)Power LevelAdjustable 10 - 100% through amplifierImpedanceOutput of amplifier  $50 \Omega$ , N female

Modulation 8VSB, QAM (output power will change between standards)

**Spurious** - 60 dBc including harmonics With Filter

### **AUDIO / VIDEO INPUT CHARACTERISTICS**

Digital Audio Inputs SDI embedded – (1) stereo pair or pass through compressed

Digital Audio FormatSelectable Dolby Digital / AC3 / Stereo / 5.1-7.1 pass-through / MPEG2 / AACAnalog Audio InputsOptional AV/L-R balanced-unbalanced audio embedded available upon request

Digital Video Inputs (4) HD / SD SDI with embedded audio

Analog Video Inputs Optional CVBS / Component / HDMI / VGA / DVI adapter available upon request

Input Resolution Auto detect any resolution

Video Scaler Scaler function can be selected on standard software to scale the input to lower resolution for matching

Encoding Modes MPEG2 / MPEG4 H264 selectable by software per each channel

Encoding Latency Ultra-low delay 50 milliseconds encoding

Encoding BitratesUser selectable from 0.5 to 20 Megabits/s per channel (VBR / CBR stat mux)Encoding ControlVideo bitrate, CBR / VBR, ultra-fast encoding modes, 1080P MPEG2 mode

Features All Closed Caption and TXT formats, Crystal-View technology

 FM Noise
 > 60 dB

 FM Noise
 > 60 dB

Technalogix.com 403-347-5400 Sales@technalogix.ca

<sup>\*\*</sup> Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. \*\*



# 4000-watt VHF Digital Transmitter

### **ASI INPUT / OUTPUT**

ASI Inputs (1) SPTS / MPTS

Remulitplex Generate, inject, remap, restamp, grooming, add / drop; Stat Mux

Max Input Bitrate214 Megabit/sASI Outputs(2) Mirror

ASI Output Format Selectable 188 / 204 bits

Transport Stream ASI Mux MPTS ready for exciters, STLs, and uplinks

Max Output Bitrate Fixed payload selectable to 19.3 Megabit/s (ATSC) or any other value as needed

#### **IPTV OUTPUT**

IP Streaming Output (1) 100 / 1000 auto

Mux IP Stream Output (1) Same as ASI MPTS Mux but over IP – ready for IP STLs, exciters, etc.

SPTS Single Stream (4) Selectable RTP / RTSP / UDP Single Program Transport Streams, IGMP, Multicast / Unicast

 Output

 IPTV Bitrates
 Same as ASI Mux output for the MUS stream, same as each encoder for the SPTS streams

Transport Stream ID TSID

#### **INTERFACE**

**DB25 Remote Port** Control: RF carrier on/off, RF power up/down, reset

Monitor: Forward/reflected RF level, control PCB Vcc

Flags: Overdrive, VSWR (adjustable trip point), high temperature

Ethernet Control: RF carrier on/off, RF power up/down, AGC/manual mode, change VSWR trip point, reset

Monitor: Forward/reflected RF level, pallet voltage, RF input level, temperature, VSWR trip point,

model/serial number


Flags: Carrier on/off, overdrive, pallet voltage, VSWR, RF input, temperature, AGC / manual

**SNMP** Control: RF carrier on/off, RF power up/down, AGC/manual mode, change VSWR trip point, reset

Monitor: Forward/reflected RF level, DC pallet voltage, RF input level, temperature, pallet current,

attenuation, run time, RF fault, model/serial number

Flags: Overdrive, VSWR, temperature, SNMP error





Screenshots off Touchscreen Interface

<sup>\*\*</sup> Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. \*\*



# 4000-watt VHF Digital Transmitter

### **PHYSICAL FEATURES**

Minimal Rack Space TAVD-4000 Amplifier

Modulator

Lightweight Enclosures Aluminum, typically 70 lbs

Operating Temperature 0 to +45° C Humidity 90%, non-condensing

**Cooling** Air cooled

34U x 30" (D) x 19" (W) 1U x 14" (D) x 19" (W)


# **ELECTRICAL CHARACTERISTICS**

Flexible AC Input TAVD-4000 Amplifier 180-264Vac, 35Aac at 208Vac single phase

Other AC supply voltages and phases available on request. Verify AC voltage range at time of order.

### TYPICAL SPECIFICATIONS

All Specifications are Approximate. Taken with TP-1000 Modulator

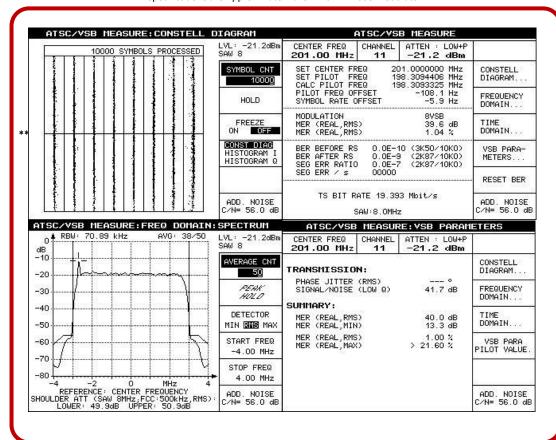

<sup>\*\*</sup> Due to continuous product improvements, Technalogix reserves the right to change specifications without notice. \*\*