

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS THE PROPERTY OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.

THIRD ANGLE PROJECTION

THIRD ANGLE PROJECTION

MOTOR SPECIFICATION

8061S148-01

Q.R. NO.	CUSTOMER NO.	
CUSTOMER	ALCAIR	
VOLTS	240	Hz 50 Ph 1 Duty AOM
MOTOR RPM	890	3.2 AMPS
NOM. OUTPUT	410 WATTS	
ROTATION	CLOCK WISE AT DRIVE END	
CAPACITOR	START	 μ F/V RUN 15/370 μ F/V
ENCLOSURE	VENTED ESHIELD AT LEAD END	
MOTOR TYPE	CSR	INSULATION CLASS B130
THERMAL PROTECTION	AUTO RESET OVERLOAD	
APPLICATION	FAN	
BEARING D.E.	6202 DDU.	LUBRICATION LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU.	
SUPPLY LEAD	SINGLE CORE 2000 $\pm$ 30 BRAIDED SLEEVEING	
EARTH PROVISION	VIA SUPPLY LEAD	
BASIC BUILD SPECIFICATION	305-570-05	PAINT/ COLOUR PC BLACK CASE PLAIN ESHIELDS
PERFORMANCE SPECIFICATION	SP85123-01	
CONNECTION DIAGRAM	393-402-04	RATING LABEL SSTDAUTO.FMT

FASCO

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

C N693

VOLTS 240	R.P.M. 890	CLASS B130	Hz 50
WATTS 410	TYPE CSR	μ F/V S N.L.	Ph 1
AMPS 3.2	DUTY AOM	μ F/V R 15/370	PROT. AUTO


WARNING

MOTOR FITTED WITH INTERNAL AUTO-RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

87.0

SPECIAL REQUIREMENTS:

- 1) CAPACITOR SUPPLIED BY CUSTOMER.
- 2) 'V' SEAL FITTED TO SHAFT AS PER BEI 246.

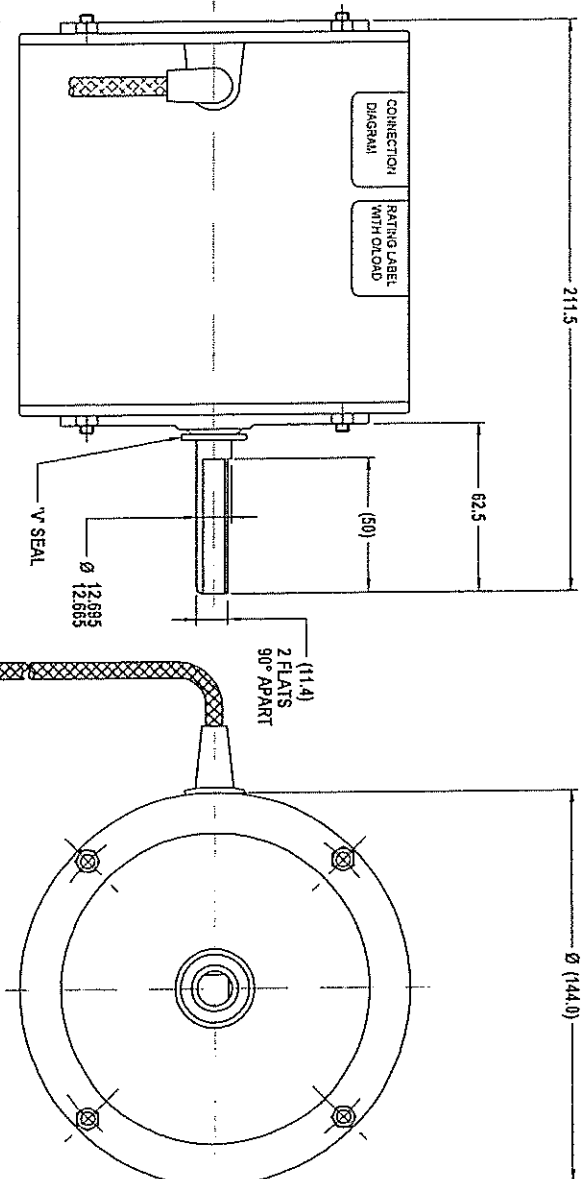

UNLESS OTHERWISE DIMENSIONS & TOLERANCE

BCB SALES & SERVICE

PH: 03 9546 3833

FAX: 03 9546 3356

DECIMALS X $\pm$ 1.0 XX $\pm$ 0.5

THIS DRAWING REMAINS THE PROPERTY OF FASCO. MOTORS AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS.

RELEASED SCALE

11111 1 1/10/01

FASCO

THAILAND

39/4 MOO 3, BANGKOK - SANGH RD, BANGKANG, MUANG NONGTHABURI DISTRICT, NONGTHABURI 1100 THAILAND

FRAME STATUS

R

SHEET

A3

MOTOR

123:8557V-410-XAD/ALCA

DWG. NO.

8061S148-01

REVISION

Q

MIC No. 003766

By: ORAN Date: 20/07/01

MIC ADD NAME PLATE AND UPDATE ESHIELDS. Note: