


Battery Powered Security Camera

User manual

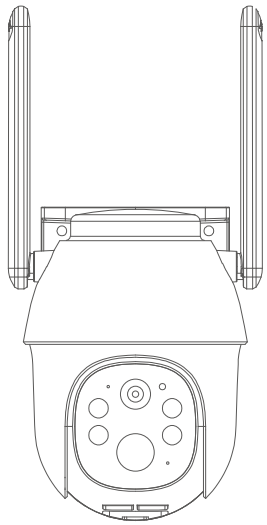

TC@yooomail.com

Note: The camera picture in the user manual for reference only, please take the physical object as the standard.

Content

Packing list.....01

Product structure-front02

Product structure-back03

Download the App.....04

Register,Login05









Add the Camera06

Function introduction07


FAQ08

221201

Packing list


 Camera*1	 Screw accessories package*1	 Solar panel*1 (optional)
 Fixed installation Bracket*1 (optional)	 USB Cable*1	 User Manual*1
 Screw accessories package*1 (optional)	 1x Positioning sticker	

Product structure-front

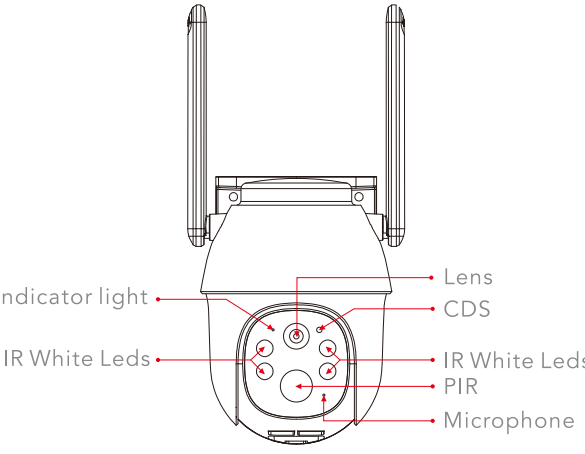

Content	Description
Working Indicator light status:	
Blue light & red light flash alternately :	SIM card arrears, card lock.
Blue light & red light flashing quickly at the same time :	SIM card is abnormal or operator refuses service.
The blue light is always on :	The device is running (5 minutes timeout in the network configuration state, automatic shutdown).

Product structure-back

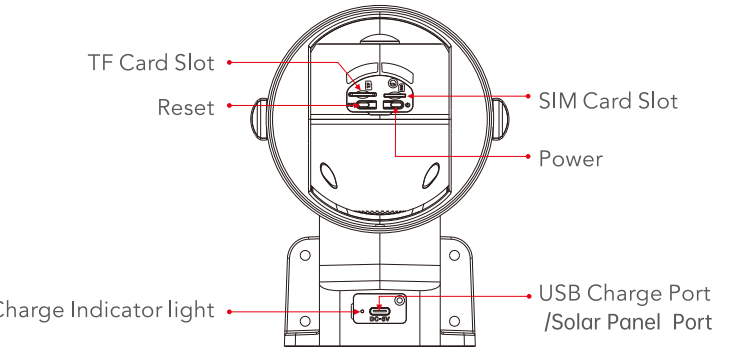

Content	Description
Charging Indicator light:	
The red light is normally on :	The camera is charging.
The blue light is normally on :	The camera is fully charged.
RESET :	Press " Reset" for about 3-5s to restore the factory default. SIM card :
1. Nano SIM card only supported (4G only supported didn't support 2G/3G/5G).	
2. The SIM card provided by us can only be used as a data card, and cannot be used for phone calls.	


3. The SIM cards purchased by users themselves need to support 4G data and have data packages. For SIM card recharge fees and other questions, please consult the relevant operator.

The following only describes how to recharge the SIM card provided by us in the app, the tariff is based on the actual price in the app.

TF card slot : Support TF card local storage (maximum 128G). please format the TF card in the "Ucon " APP for the first time using

Download the App


Ucon is available for both iOS and Android operation system. Search the name " Ucon " in App Store or Google Play, or scan the QR Code to download the App.



Download App(IOS&android)


Register, Login

- Register : Select your country to register an account with your email.
- Login : Enter the existing account and password to log in.

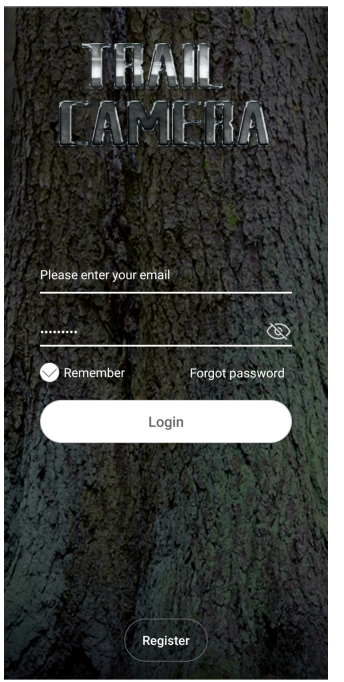


Add the Camera

- Ensure that the device operates in a network environment with a relatively good 4G signal of the current mobile phone;
- In the off state, insert the Nano SIM card and TF card into the device, press and hold "POWER" for 1-2S to turn on the device;
- Wait for the device indicator light to change from slow flashing red to steady blue light (if the device indicator blue light is not always on, press and hold "Reset" for 3-5S until the device appears "beep", wait for the device to reset and restart to configure network)
- Open the " Ucon " APP, click " Add a device" on the main interface to add a device, select " Setup 4G device", and finally refer to the APP text or voice prompts until the device is added successfully;

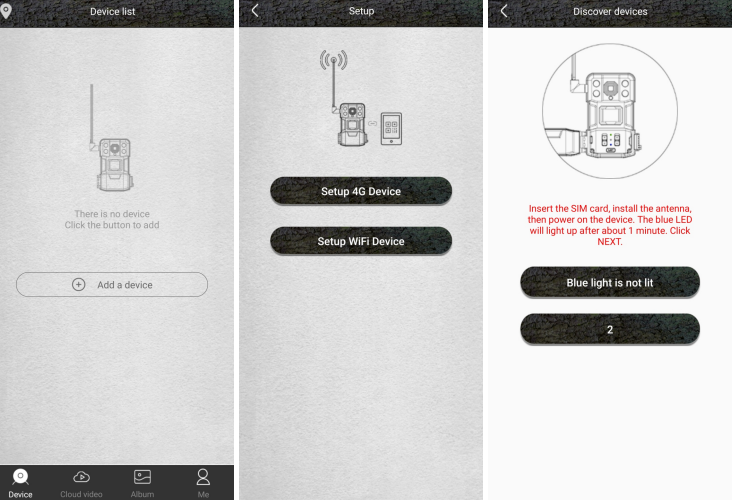

Function introduction

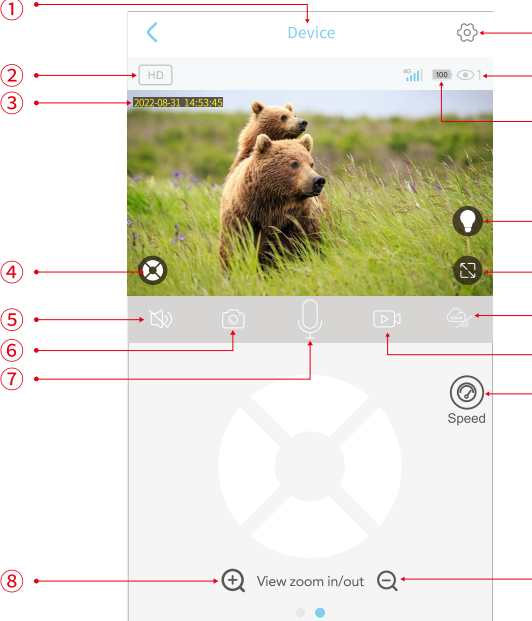

① Camera name	⑦ Intercom	⑬ Full screen preview
② Definition of the picture	⑧ Picture enlarge	⑭ Cloud/SD card storage switch
③ Time of the device	⑨ Camera Settings	⑮ Record
④ PTZ	⑩ Online user	⑯ PTZ Speed
⑤ Sound of the device	⑪ battery level	⑰ Picture Zoom out
⑥ Screenshot	⑫ IR/White LED switch	

FAQ

- Failed to add during network configuration?**
Please ensure that the device is installed in a good 4G network environment
- After scan adding is still unsuccessful?**
Restart the device or power off the device after scan adding is still unsuccessful, and then try to add it again.
- The device cannot preview normally?**
Please check whether the 4G network signal is too weak, and check whether the SIM card data is in arrears. If you still can't preview, reset the camera and add it again.
- After resetting the device, why is the camera still in the device list?**
Resetting the device only to reset the camera's network configuration, but cannot change the configuration on the APP, to delete the camera, you must log in the APP to delete.
- Are there any regional restrictions on SIM usage?**
Generally, it is not limited to provinces, but for some border areas, real-name or compliance operations are required in accordance with the regulations of the Ministry of Industry and Information Technology or communication operators.
- If the device comes with an IoT SIM card, can it be used on a mobile phone or other device?**
The attached IoT card has been bound by the device, and it is forbidden to insert it into other devices for use, otherwise the IoT card will be locked and cannot be used;
- What should I do if the data card expires?**
The attached IoT card comes with a two-year activation period. If it is not used within the time limit, the IoT card will not be able to be used.
- Why does the device can not recognize the TF card?**
Please insert and remove the TF card after power off, please check if the TF card is working normally and whether it is in FAT32 format, when the mobile phone or the device is working in unstable network, the APP also will prompt that the TF card can not be recognized.