

Product Descriptions

INTENDED Purchase - The LED Corn bulbs is light for replace traditional 360 degree lights such as metal halide,CFL,HID,HPS for parking lot,gas station,warehouse indoor and outdoor energy saving purpose.Design install into existing fixture with cost-effective solution.

STRUCTURE - Die casting aluminum no fan passive cooling solution,PC cover protect LEDs from dust,insect and humidity working environment.Driver fully sealed by thermal paste with function to disperse heat into outside Adopt 150LM/W LED chips improve light efficiency.Driver part apart from lamp body speed cooling hot air out.

OPTICS - Milky and Transparent PC cover for choice range from 27W~ 125W with E26,E27,E39,E40 socket for choice in different application sealed or open fixture.

ELECTRICAL - Standard 6kV surge protection,regular input voltage 100~ 277V,no ballast need.

INSTALLATION - Easily fitted in traditional fixture instead of MHL and HPS.

LISTINGS - UL,cUL,DLC certification approved.
Suitable for sealed,dry,humidity working environment from -40°C up to 45°C.

WARRANTY - years warranty.
Replaceable driver part design.Free provide materials replacement easy for customer replace.
We will responsible if damaged or quality problem. like damaged under shipment.
Screws loosen.Driver problem.

Features

E26 E27 E39 E40(27~ 54W)
E39 E40(80~125W)
UL,cUL,DLC approved
360° Degree Beam Angle
100~277V input voltage
No fan Passive cooling solution
Die-casting heat sink
Suitable in enclosed fixture
PC Cover milky&transparent
Driver fully sealed by thermal paste.
6K High voltage Surge test approved.

SMD2835 150lm/W LED chips
50,000hrs lifespan
5 years warranty
Top Brand Rubycon Capacitors
No UV or IR radiation
No magnetic disturbance driver design
OEM special design company LOGO
IP44 waterproof dust free
Separately driver with body speed heat dissipation(80~ 125W)



27~54W




80~125W

Series	Lumens	Base	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
RCL-27W	4010LM 4,010 lumens	E26,E27,E39,E40	360° Degree Beam Angle	Input Voltage 100-277V 50~60Hz Total Power(W) 27W Power Factor(%) >90	165PCS SMD2835 chips	WW 2800~3200 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	70 70 CRI 80 80 CRI 90 90 CRI
RCL-36W	5250LM 5,250 lumens	E26,E27,E39,E40	360° Degree Beam Angle	Input Voltage 100-277V 50~60Hz Total Power(W) 36W Power Factor(%) >90	297PCS SMD2835 chips	WW 2800~3200 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	70 70 CRI 80 80 CRI 90 90 CRI
RCL-45W	6550LM 6,550 lumens	E26,E27,E39,E40	360° Degree Beam Angle	Input Voltage 100-277V 50~60Hz Total Power(W) 45W Power Factor(%) >90	429PCS SMD2835 chips	WW 2800~3200 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	70 70 CRI 80 80 CRI 90 90 CRI
RCL-54W	7900LM 7,900 lumens	E26,E27,E39,E40	360° Degree Beam Angle	Input Voltage 100-277V 50~60Hz Total Power(W) 54W Power Factor(%) >90	429PCS SMD2835 chips	WW 2800~3200 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	70 70 CRI 80 80 CRI 90 90 CRI


Series	Lumens	Base	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
RCL-80W	11500LM 11, 500 lumens	E39,E40	360° Degree Beam Angle	Input Voltage 100-277V 50~60Hz Total Power(W) 80W Power Factor(%) >90	440PCS SMD2835 chips	WW 2800~3200 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	70 70 CRI 80 80 CRI 90 90 CRI
RCL-100W	14700LM 14,700 lumens	E39,E40	360° Degree Beam Angle	Input Voltage 100-277V 50~60Hz Total Power(W) 100W Power Factor(%) >90	616PCS SMD2835 chips	WW 2800~3200 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	70 70 CRI 80 80 CRI 90 90 CRI
RCL-125W	18400LM 18,400 lumens	E39,E40	360° Degree Beam Angle	Input Voltage 100-277V 50~60Hz Total Power(W) 125W Power Factor(%) >90	756PCS SMD2835 chips	WW 2800~3200 K NW 4000~4500 K DW 5000~5500 K CW 6000~6500 K	70 70 CRI 80 80 CRI 90 90 CRI

DIMENSIONS

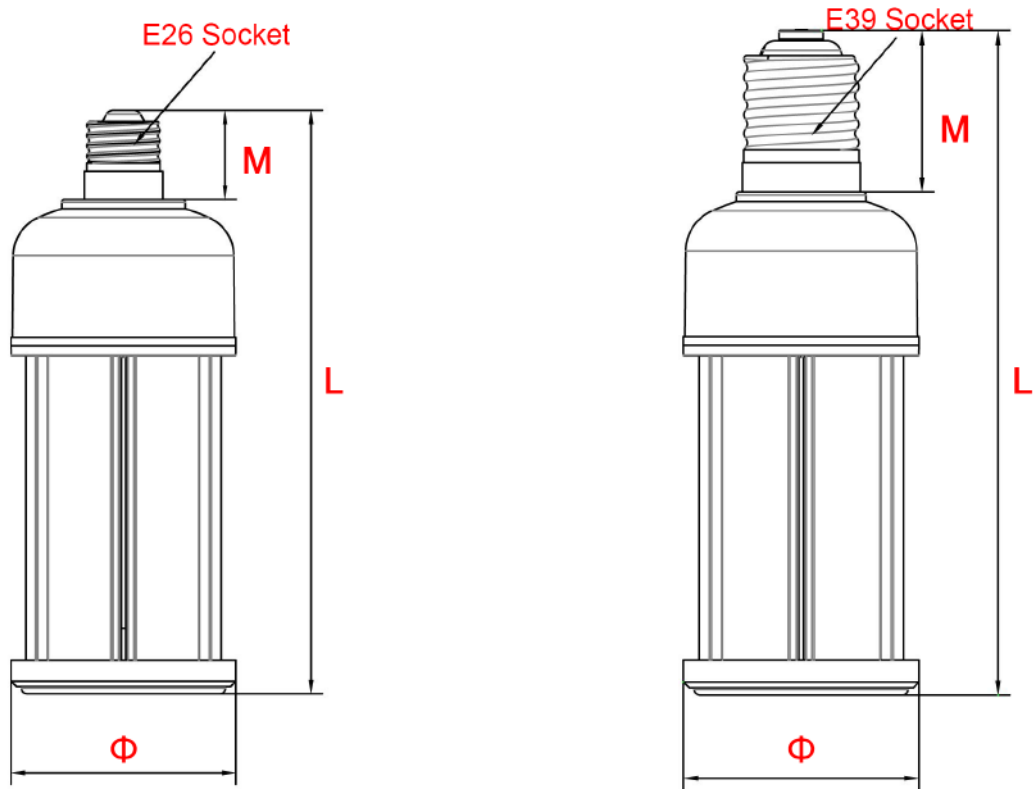

	E26			E39		
Series	Φ	M	L	Φ	M	L
RCL-27W	3.15" (80MM)	1.25" (31.8MM)	8.27" (210MM)	3.15" (80MM)	1.84" (46.8MM)	8.86" (225MM)
RCL-36W	3.15" (80MM)	1.25" (31.8MM)	9.06" (230MM)	3.15" (80MM)	1.84" (46.8MM)	9.65" (245MM)
RCL-45W	3.15" (80MM)	1.25" (31.8MM)	10.24" (260MM)	3.15" (80MM)	1.84" (46.8MM)	10.83" (275MM)
RCL-54W	3.15" (80MM)	1.25" (31.8MM)	10.24" (260MM)	3.15" (80MM)	1.84" (46.8MM)	10.83" (275MM)
RCL-80W	/	/	/	4.72" (120MM)	2.05" (52MM)	9.84" (250MM)
RCL-100W	/	/	/	4.72" (120MM)	2.05" (52MM)	10.63" (270MM)
RCL-125W	/	/	/	4.72" (120MM)	2.05" (52MM)	11.42" (290MM)

RCL-27W

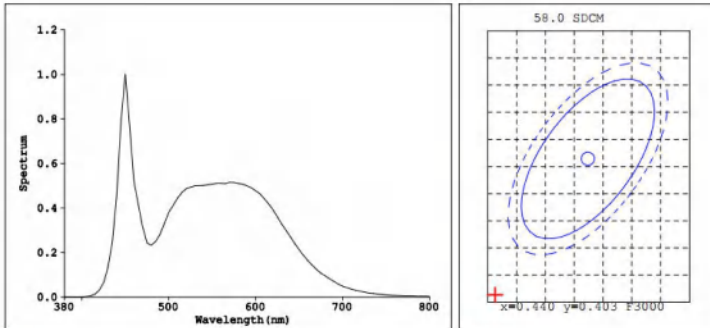

Color Parameters:

Chromaticity Coordinate: $x=0.3277$ ($dx=-0.0003$) $y=0.3497$ ($dy=0.0126$)
 Chromaticity Coordinate: $u'=0.2004$ $v'=0.4812$ ($duv=6.48e-03$)
 Tc=5705K Dominant WL:Ld=532.3nm Purity=3.5% Centroid WL:545.0nm
 Ratio:R=15.4% G=80.1% B=4.5% Peak WL:Lp=450.0nm HWL:20.1nm
 Render Index:Ra=82.7
 R1 =80 R2 =87 R3 =92 R4 =83 R5 =82 R6 =83 R7 =88
 R8 =67 R9 =2 R10=69 R11=83 R12=60 R13=82 R14=96 R15=74

Photo Parameters:

Flux: 4007.52 lm Fe: 12.299 W Efficacy:145.2 lm/W
 WHITE:ANSI_5700K


Electrical Parameters:

Lamp : U=224.0V I=0.1280A P=27.60W PF=0.9570

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=32917(G=4,D=56)
 REF=7618(R=3) $\Delta=0.360\%$ PMT: 27.1 centigrade [26.7]

RCL-36W

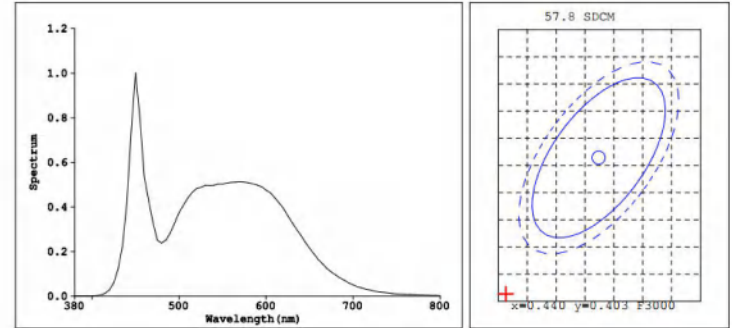

Color Parameters:

Chromaticity Coordinate: $x=0.3280$ ($dx=-0.0003$) $y=0.3497$ ($dy=0.0123$)
 Chromaticity Coordinate: $u'=0.2006$ $v'=0.4812$ ($duv=6.33e-03$)
 Tc=5690K Dominant WL:Ld=534.0nm Purity=3.6% Centroid WL:546.0nm
 Ratio:R=15.5% G=79.9% B=4.6% Peak WL:Lp=450.0nm HWL:20.4nm
 Render Index:Ra=83.1
 R1 =81 R2 =87 R3 =93 R4 =83 R5 =82 R6 =83 R7 =88
 R8 =68 R9 =3 R10=71 R11=83 R12=60 R13=82 R14=96 R15=75

Photo Parameters:

Flux: 5245.2 lm Fe: 16.106 W Efficacy:145.7 lm/W
 WHITE:ANSI_5700K


Electrical Parameters:

Lamp : U=223.1V I=0.1660A P=36.00W PF=0.9730

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=43412(G=4,D=56)
 REF=9940(R=3) $\Delta=0.517\%$ PMT: 27.1 centigrade [26.8]

RCL-45W

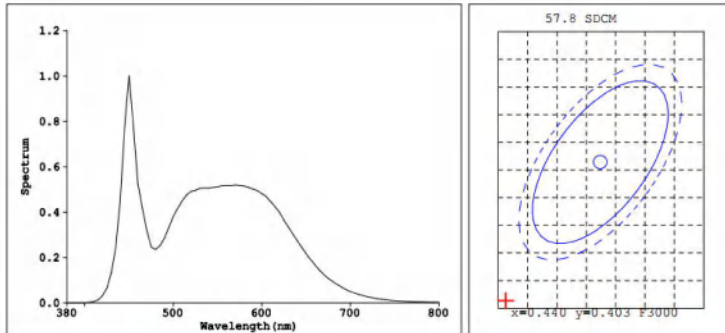

Color Parameters:

Chromaticity Coordinate: $x=0.3282$ ($dx=-0.0002$) $y=0.3505$ ($dy=0.0130$)
 Chromaticity Coordinate: $u'=0.2004$ $v'=0.4816$ ($duv=6.64e-03$)
 $Tc=5683K$ Dominant WL: $Ld=535.9nm$ Purity=3.9% Centroid WL: $546.0nm$
 Ratio: $R=15.5\%$ $G=80.0\%$ $B=4.5\%$ Peak WL: $Lp=450.0nm$ HWL: $20.4nm$
 Render Index: $Ra=82.9$
 R1 =80 R2 =87 R3 =92 R4 =83 R5 =82 R6 =83 R7 =88
 R8 =68 R9 =3 R10=70 R11=83 R12=60 R13=82 R14=96 R15=74

Photo Parameters:

Flux: 6510.5 lm Fe: 19.679 W Efficacy: 145.0 lm/W
 WHITE: ANSI_5700K

Electrical Parameters:


Lamp : U=222.9V I=0.2060A P=44.90W PF=0.9770

Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm[0]
 REF=12143(R=3) $\#=0.431\%$

$Ip=52489$ ($G=4, D=57$)
 PMT: 27.1 centigrade [26.7]

RCL-54W

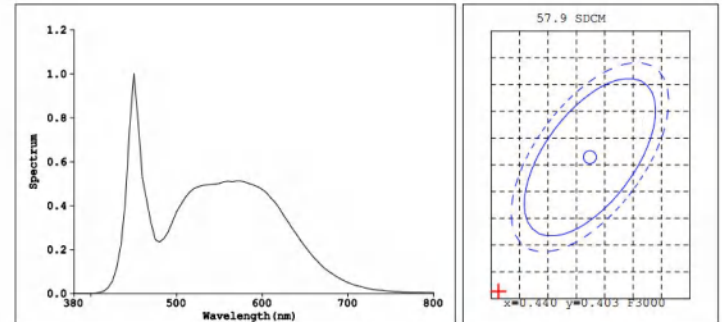

Color Parameters:

Chromaticity Coordinate: $x=0.3281$ ($dx=-0.0002$) $y=0.3504$ ($dy=0.0129$)
 Chromaticity Coordinate: $u'=0.2004$ $v'=0.4816$ ($duv=6.67e-03$)
 $Tc=5687K$ Dominant WL: $Ld=535.4nm$ Purity=3.8% Centroid WL: $546.0nm$
 Ratio: $R=15.4\%$ $G=80.0\%$ $B=4.6\%$ Peak WL: $Lp=450.0nm$ HWL: $20.0nm$
 Render Index: $Ra=82.7$
 R1 =80 R2 =87 R3 =93 R4 =83 R5 =81 R6 =83 R7 =88
 R8 =67 R9 =2 R10=70 R11=82 R12=59 R13=82 R14=96 R15=74

Photo Parameters:

Flux: 7871 lm Fe: 23.152 W Efficacy: 146.3 lm/W
 WHITE: ANSI_5700K

Electrical Parameters:


Lamp : U=223.7V I=0.2280A P=53.8W PF=0.9800

Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm[0]
 REF=14279(R=3) $\#=0.741\%$

$Ip=13246$ ($G=3, D=54$)
 PMT: 27.0 centigrade [26.7]

RCL-80W

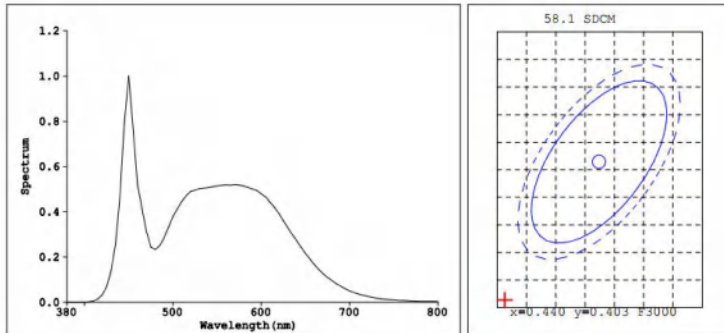

Color Parameters:

Chromaticity Coordinate: $x=0.3275$ ($dx=-0.0003$) $y=0.3498$ ($dy=0.0128$)
 Chromaticity Coordinate: $u'=0.2002$ $v'=0.4812$ ($duv=6.61e-03$)
 Tc=5712K Dominant WL:Ld=531.8nm Purity=3.5% Centroid WL:545.0nm
 Ratio:R=15.3% G=80.1% B=4.5% Peak WL:Lp=450.0nm HWL:20.4nm
 Render Index:Ra=82.5

R1 =80	R2 =86	R3 =92	R4 =83	R5 =81	R6 =82	R7 =88
R8 =67	R9 =1	R10=69	R11=82	R12=60	R13=81	R14=96
						R15=74

Photo Parameters:

Flux: 11515 lm Fe: 34.811 W Efficacy:145.2 lm/W
 WHITE:ANSI_5700K


Electrical Parameters:

Lamp : U=224.0V I=0.3720A P=79.30W PF=0.9520

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]
 REF=21395(R=3) $\lambda=-0.479\%$ Ip=19520(G=3,D=55)
 PMT: 27.0 centigrade [26.6]

RCL-100W

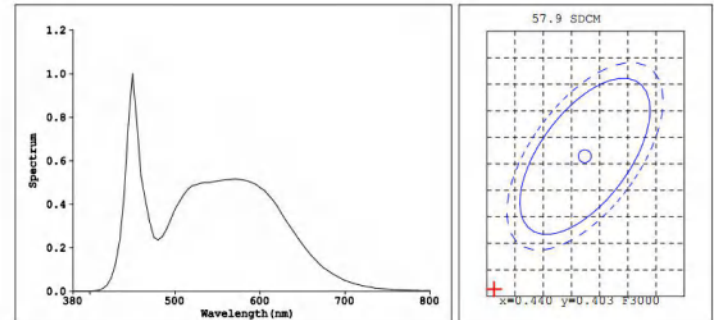

Color Parameters:

Chromaticity Coordinate: $x=0.3280$ ($dx=-0.0003$) $y=0.3500$ ($dy=0.0125$)
 Chromaticity Coordinate: $u'=0.2005$ $v'=0.4814$ ($duv=6.44e-03$)
 Tc=5687K Dominant WL:Ld=534.6nm Purity=3.7% Centroid WL:546.0nm
 Ratio:R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.3nm
 Render Index:Ra=82.9

R1 =80	R2 =87	R3 =92	R4 =83	R5 =82	R6 =83	R7 =88
R8 =67	R9 =2	R10=70	R11=83	R12=60	R13=82	R14=96
						R15=74

Photo Parameters:

Flux: 14653 lm Fe: 41.041 W Efficacy:145.8 lm/W
 WHITE:ANSI_5700K


Electrical Parameters:

Lamp : U=221.4V I=0.4230A P=100.50W PF=0.9620

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]
 REF=25211(R=3) $\lambda=0.667\%$ Ip=23115(G=3,D=55)
 PMT: 26.9 centigrade [26.8]

RCL-125W

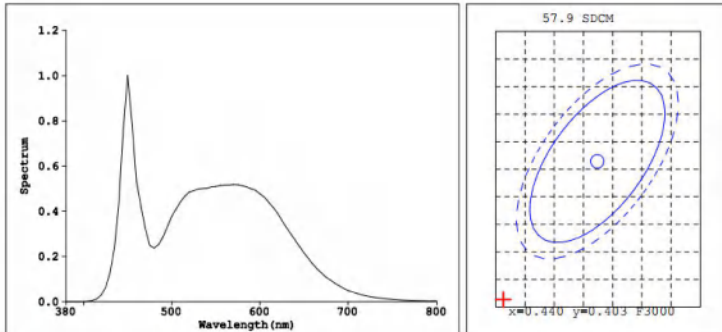

Color Parameters:

Chromaticity Coordinate: $x=0.3279$ ($dx=-0.0003$) $y=0.3500$ ($dy=0.0125$)
 Chromaticity Coordinate: $u'=0.2004$ $v'=0.4813$ ($duv=6.53e-03$)
 Tc=5696K Dominant WL:Ld=533.9nm Purity=3.7% Centroid WL:546.0nm
 Ratio:R=15.4% G=80.0% B=4.6% Peak WL:Lp=450.0nm HWL:20.5nm
 Render Index:Ra=82.7
 R1 =80 R2 =87 R3 =92 R4 =83 R5 =81 R6 =83 R7 =88
 R8 =67 R9 =2 R10=70 R11=82 R12=60 R13=82 R14=96 R15=74

Photo Parameters:

Flux: 18340 lm Fe: 52.703 W Efficacy:145.9 lm/W
 WHITE:ANSI_5700K

Electrical Parameters:

Lamp : U=222.6V I=0.5440A P=125.7W PF=0.9710


Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]
 REF=32343(R=3) %=0.698%


$I_p=29682$ (G=3,D=55)
 FMT: 26.8 centigrade [26.6]

SCHEMATIC DIAGRAM

REPLACE CFL



REPLACE HPS



1. Remove old ballast or disconnect from existing lamp holder.
Remove and dispose of ballast in correct manner.
Shown as Figure 1.(North America 100-277 VAC)

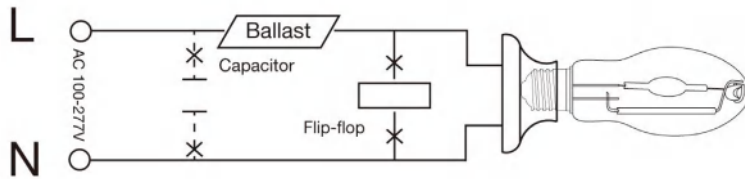


Fig 1

2. Reconnect directly to the existing lamp holder. Shown as Figure 2
(North America 100-277VAC)

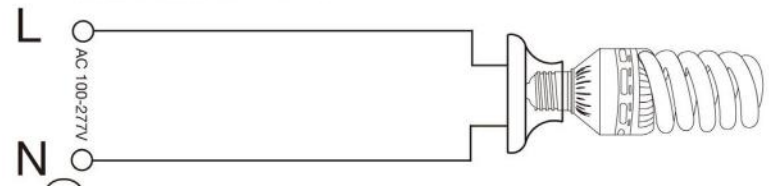


Fig 2

3. Install New LED Replacement lamp. Shown as Figure 3. Please make
sure the old fitting is correctly earth. (North America 100-277VAC)


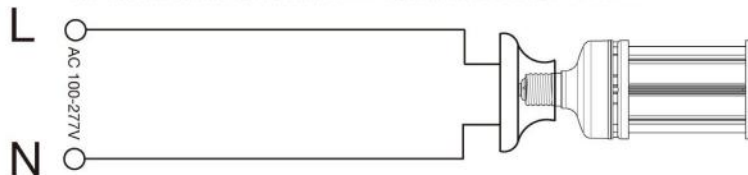


Fig 3

PACKAGING



Series	Net Weight	Unit	Package Size
RCL-27W	0.685kg	1 pcs	110*110*130mm (EPE)
		20 pcs	610*253*490cm (carton)
RCL-36W	0.754kg	1 pcs	110*110*130mm (EPE)
		20 pcs	610*278*490cm (carton)
RCL-45W	0.904kg	1 pcs	110*110*130mm (EPE)
		20 pcs	610*293*490cm (carton)
RCL-54W	0.936kg	1 pcs	110*110*130mm (EPE)
		20 pcs	610*303*490cm (carton)
RCL-80W	1.434kg	1 pcs	130*130*170mm (EPE)
		12 pcs	560*295*430cm (carton)
RCL-100W	1.560kg	1 pcs	130*130*170mm (EPE)
		12 pcs	560*315*430cm (carton)
RCL-125W	1.654kg	1 pcs	130*130*170mm (EPE)
		12 pcs	560*345*430cm (carton)

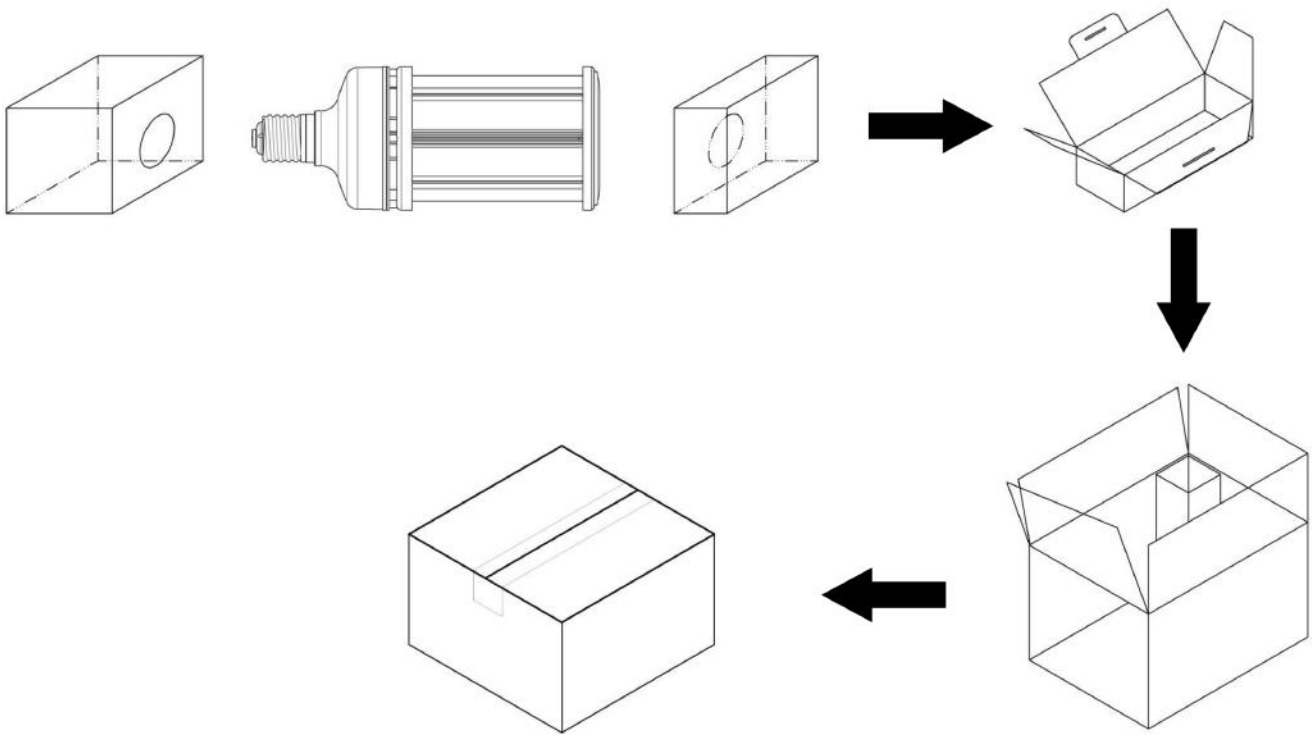