



# FlowDesk™ 3 Assembly Instructions

FlowDesk 3; Acacia Wood | MS Base

## Box 1

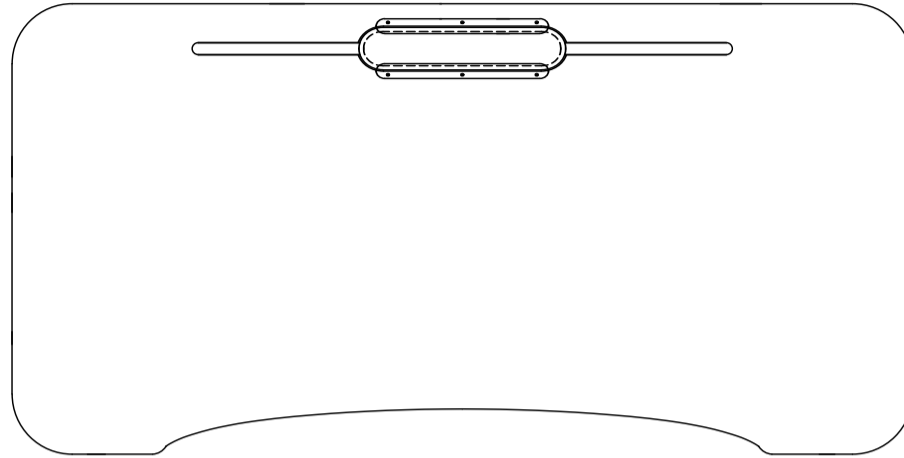


1. Pre-Assembled Acacia table top with cable tray box & Stability bar with hardware.

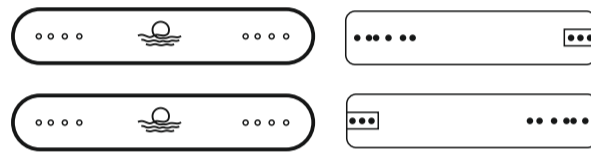

## Box 2




2. L-Columns - 1 & 2

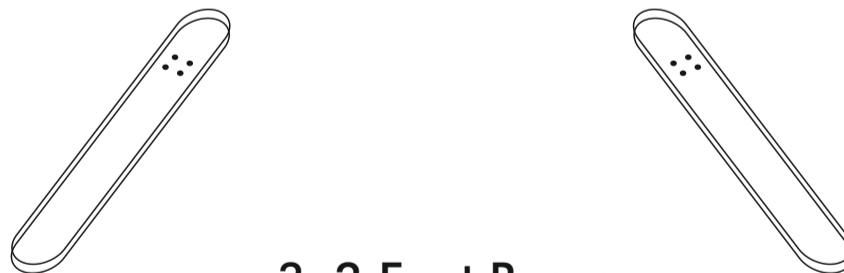




3. 2 Foot Bases



4. L key, Type A screws, Type B screws, Type C screws

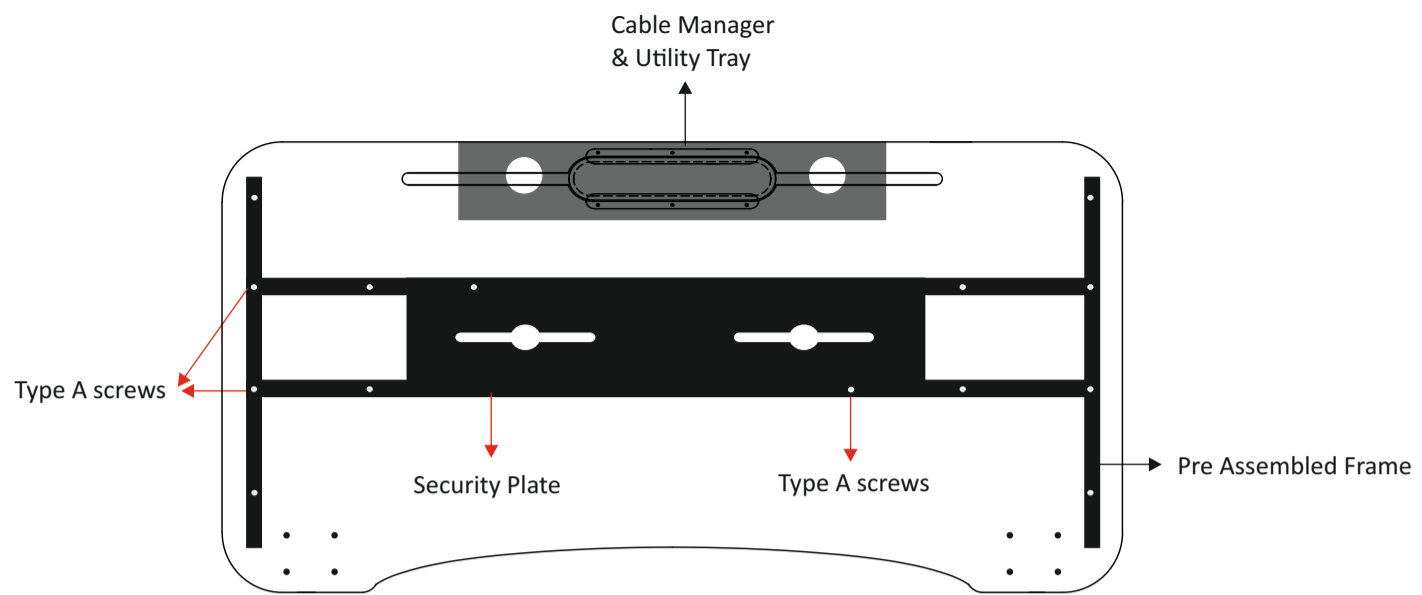


1. Place the pre assembled table top upside down on the protective cover.

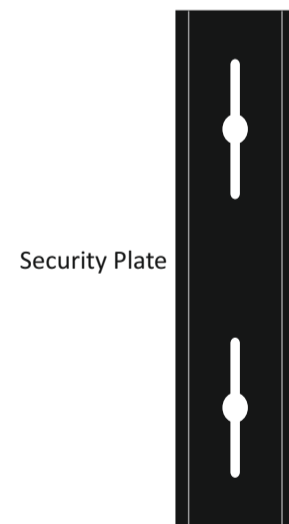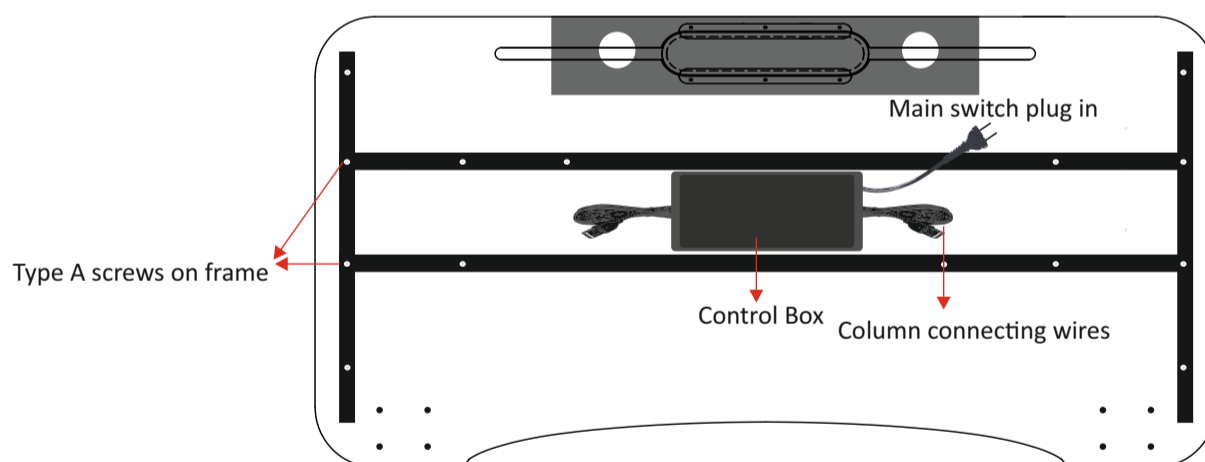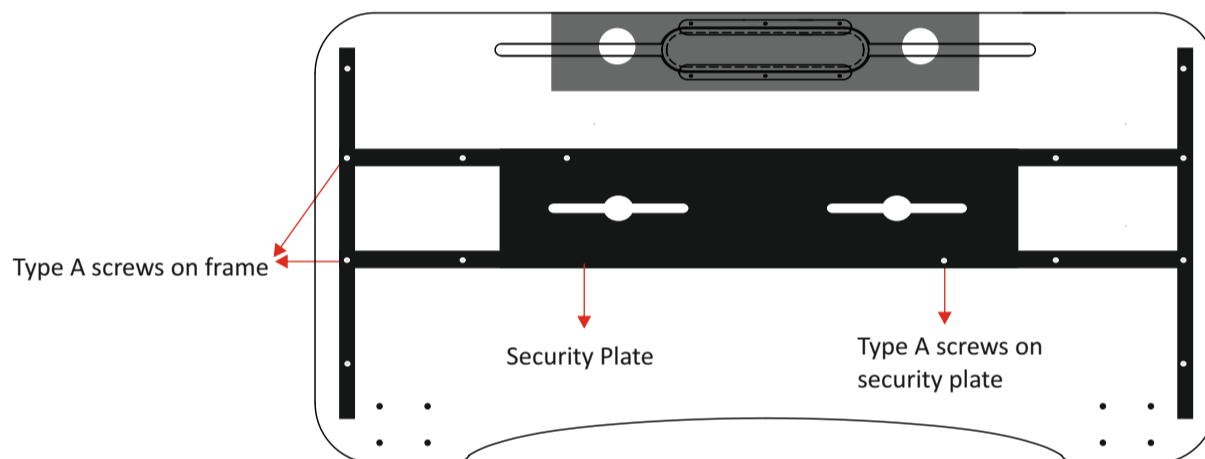


2. Unscrew the Type A screws on security plate and screws on the parallel frame using the L key and take the coiled wires out.

Please note security plate is put for shipping safety. You can choose to keep it or discard it post installation.

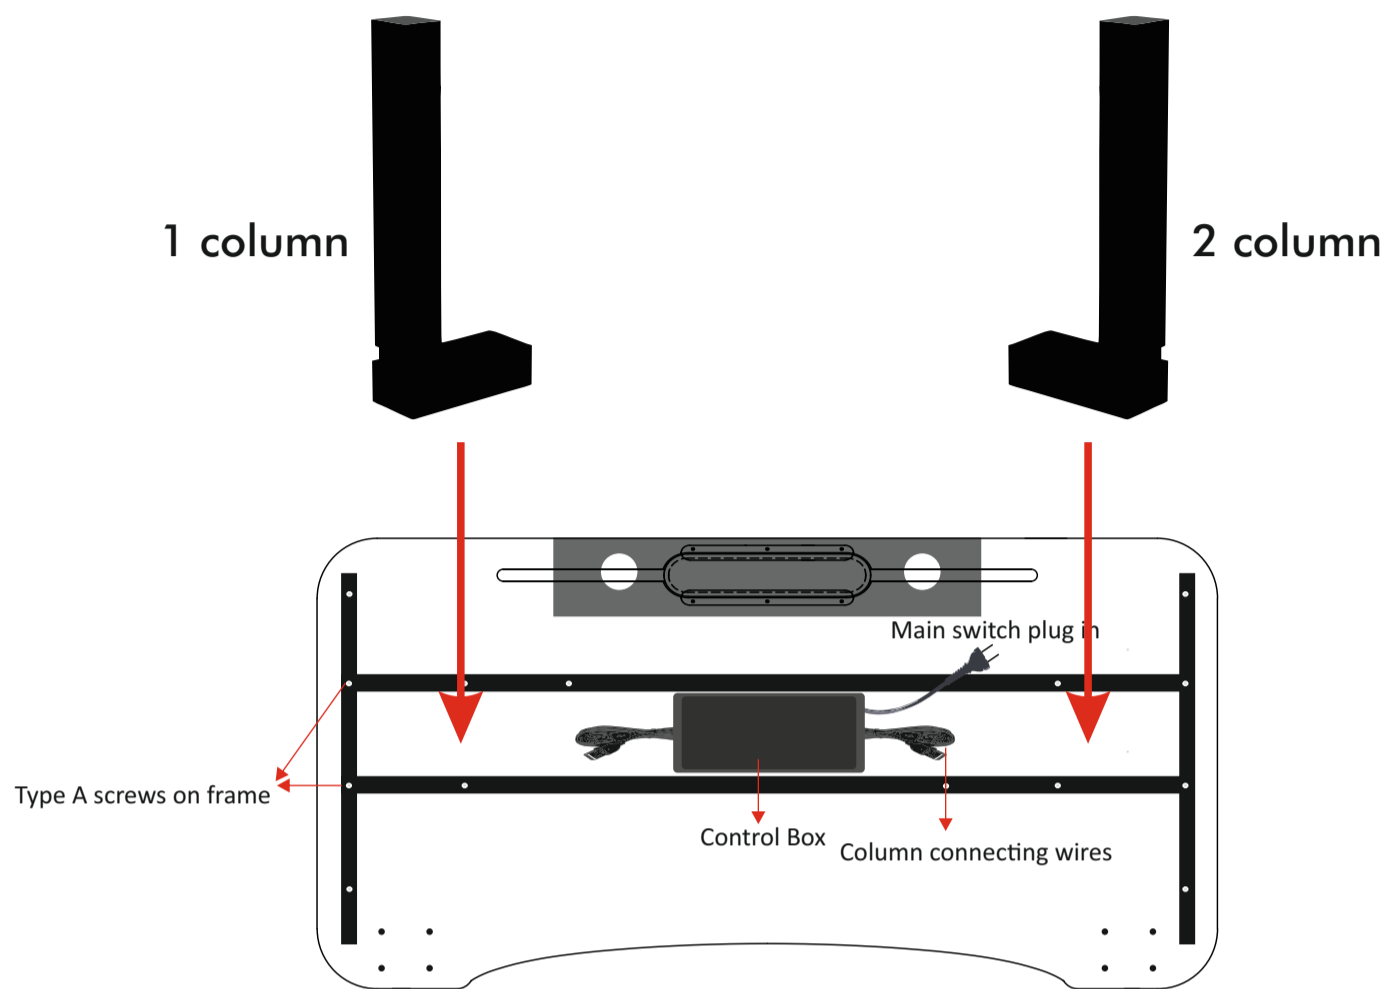


3. Place the columns as per their respective number. Make sure the groove of the strength bar on the column is facing the cable management and utility tray. Using the Type A screws & L-Key, secure the columns.

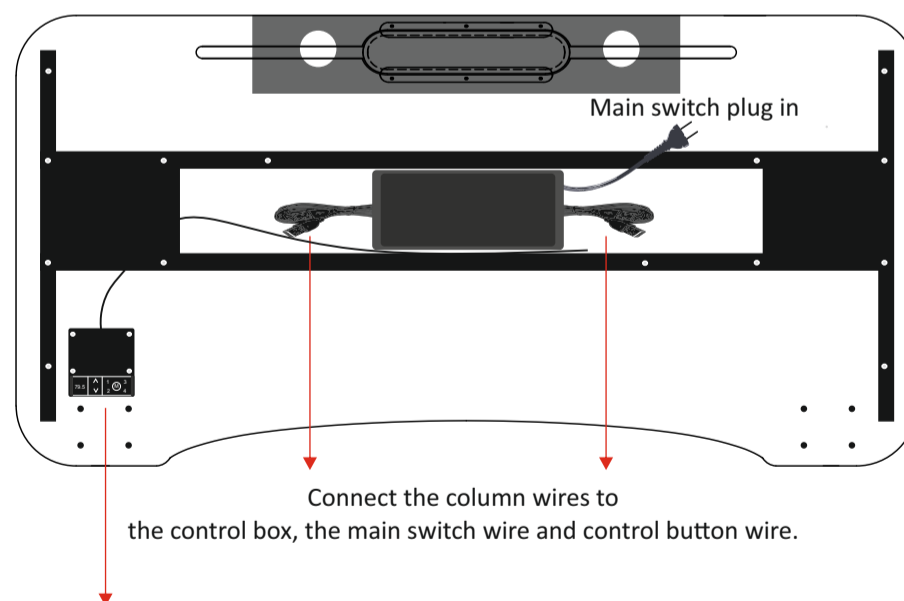

You can connect the control box on either side.

4. Connect the column wires, main plug wire, and the control button. Use the TYPE C screws to secure the control button to the desk. Once done, you can seal it back with the security plate if you wish. to keep it -using the same TYPE A screws.

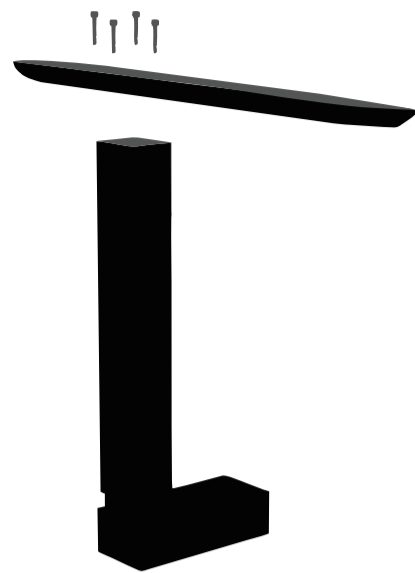


1 column




2 column

4. Now with the columns fixed to the surface, use the type B screws to fix the column feet to the columns using the L Key.

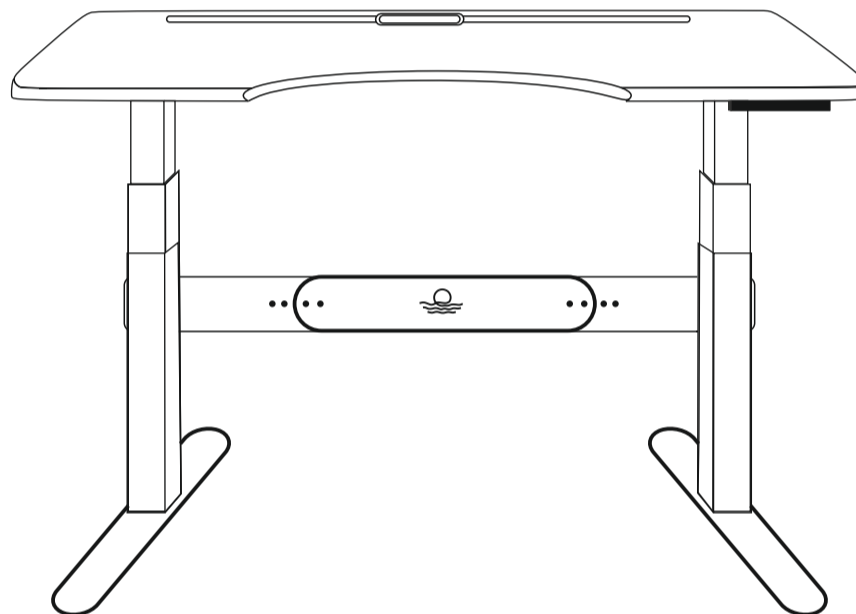

5. Follow the videos shared for setting up the Stability Bar & Cable Tray. Once done, flip the desk with the help of a mate.

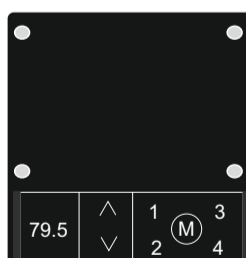

6. Push the invisible touch controls, gently press the up & down arrows to adjust height, you can save up to 4 heights using the control panel, to save, get the table to the desired height, Press M and then number setting on which you want to save.  
eg. If you want to save 115cm height @ no. 3, get the table to 115, press M and then 3.