

12~24VDC

XTREME THIN XT12


12-LED SINGLE/DUAL COLOUR LIGHT HEAD (Surface Mount)



FEATURES

- New Generation Xtreme optic for wide angle visual and classic aesthetics.
- 12LED Single colour or 6LED/6LED Dual colour option.
- SAE and ECE R65 certified high power output.
- ECE R10 EMC Compliance.
- 0.39" (10mm) Super low-profile thickness.
- Long life LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Aluminum base for efficient heat dissipation.

DIMENSIONS

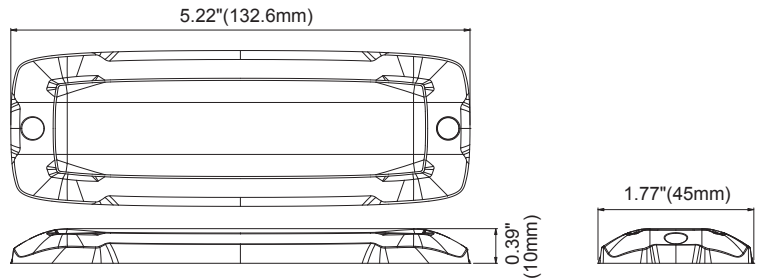

SPECIFICATIONS

Meets: SAE J595 Class1
 CA13 Class B (R/A/B)
 ECE R65 (XA1, XB1)
 ECE R65 (XA2, XB2) * 12LED Single Colour only
 ECE R10
 IPX8

Bulb: High-power LED x 12pcs

Warning Patterns: 16 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.88A @12VDC / 0.44A @24VDC
 (varies with flash pattern)

Avg. Power: 10.55 Watts (varies with flash pattern)

Max. Current: 1.76A @12VDC / 0.88A @24VDC

Max. Power: 21.1 Watts

Wires: Red-Vcc : 25cm (20AWG)
 Black-GND : 25cm (20AWG)
 White-Low Power : 25cm (20AWG)
 Yellow-Sync & Functions : 25cm (20AWG)

Fuse Recommended: 3A

Available in: RED , BLUE , AMBER , WHITE

FLASH PATTERN

Flash Patterns			
1	Double(R65)	9	Double (SAE)
2	Single(R65)	10	Triple (SAE)
3	Triple(R65)	11	Quad (SAE)
4	Quad(R65)	12	Quint (SAE)
5	Random	13	Ultra (SAE)
6	Steady	14	Single-Quad
7	Single(SAE)(CA13)	15	Single H/L
8	Mega	16	Singe-Triple-Quint

FLANGE KIT

99.M57X0.000
 (FLANGE, CHROME)

99.M57X1.000
 (FLANGE, BLACK)

99.M57X2.000
 (FLANGE, WHITE)

