



FEATURES

- Low service costs
- Long life
- Acoustic alarm
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)

| PRO |

IDEAL FOR STORING
TUNA FISH FOR SUSHI



PRO 11



PRO 21




PRO 31



PRO 41



PRO 60

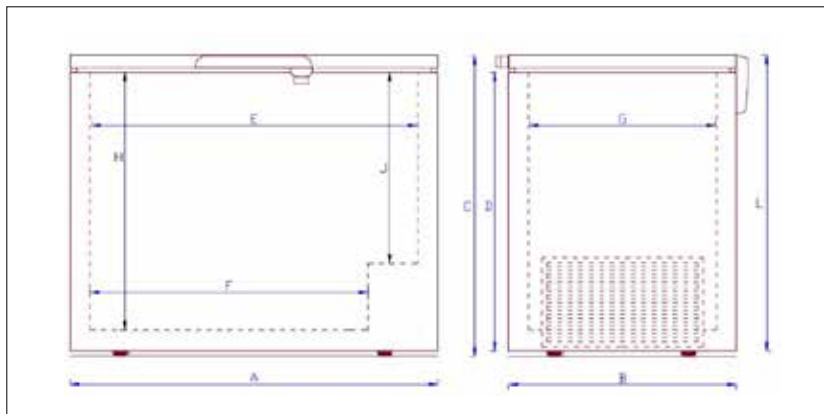

	PRO 11	PRO 21	PRO 31	PRO 41	PRO 60
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300	360	481
Net volume, litres	130	226	300	360	481
Temperature range inside unit	-30 to -60	-30 to -60	-30 to -60	-30 to -60	-30 to -60
Refrigerant: Mix of 2 Hydro carbons	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh	4,3	5	5,2	6,1	9,2
Input power (watt)	375	455	544	587	612
DIMENSIONS					
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865
Internal dimensions (WxDxH)	520x450x650	850x450x650	1100x450x650	1300x450x650	1540x490x670
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1540
Dimension F	320	650	900	1100	1340
Dimension G	450	450	450	450	490
Dimension H	650	650	650	650	670
Dimension J	400	400	400	400	420
Dimension L	850	850	850	850	850
Insulation ,mm	100	100	100	100	80
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (option)	1	2	3	4	4
Castors w. brakes	Incl.	Incl.	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.	Incl.	Incl.
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.	Incl.	Incl.
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Digital	Digital	Digital	Digital	Digital
Net weight, kg	56	67	80	89	95
Gross weight, kg	63	74	88	97	104
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	44	38
Standard Trailer capacity	102	72	56	50	44