



出逢いに感謝、お客様を大切に

-76°F ULTRA LOW TEMPERATURE FREEZER

PRO-31 OPTIMIZED FOR STORING TUNA FISH FOR SUSHI

Standard Features



Adjustable manual controller holds correct temperature for your needs up to -76 degree Fahrenheit.

Pre-condenser unitizes a balance between cooling function, cost, and energy since higher pre-cooling efficiency gives improved condenser function.



Sealed Cabinet interior for ease of cleaning, sanitation, and food safety standard.

Locking system with key protect the contents of the unit making unauthorized removal of material impossible.



Casters allow operators to provide cleanable floor surface underneath the freezer for sanitation.

Stay-open hinges allow ease of access.



Defrost water drain to conveniently remove water during defrosting. Also, bottom drain with plug releases the vacuum suction to easily open the door.

Project Name: _____

Serial Number: _____

Location: _____

Quantity: _____

Purchase Date: _____





▲ PRO-31



About Elcold


Denmark has historically been a pioneer in the development of individual freezing units. Mass production of freezers started there around 1960, and Elcold has been in the industry right from the start. For more than 50 years, Elcold has constantly been focused on improving their products. Elcold has acquired a vast experience, which today enables them to make some of the finest and most reliable freezers and coolers on the market. The key words are high quality and innovative design. Elcold is certified according to the ISO 9001/2015 Quality Assurance System as well as the ISO 14001:2015 Environmental Management System.

Plug and Outlet Configuration



Dimensions and Information

Model Number	Pro 31
External Dimension [mm]	1305 W x 655 D x 866 H
External Dimension [inch]	51.4 W x 25.8 D x 34.1 H
Internal Dimension [mm]	1099 W x 449 D x 650 H
Internal Dimension [inch]	43.3 W x 17.7 D x 25.6 H
Power	110volt / 60Hz / 1 phases / 3.2 amps
Type of cooling/defrost	-Statics / Manual
Power Consumption [Watts]	4/0
Power Cord [meter / ft]	over 3 / over 10
Temperature Range Inside Unit	- 50 to - 76 degree Fahrenheit
Outer / Inner Cabinet	White / White
Weight [kg / lb]	79.8 / 176
	UL

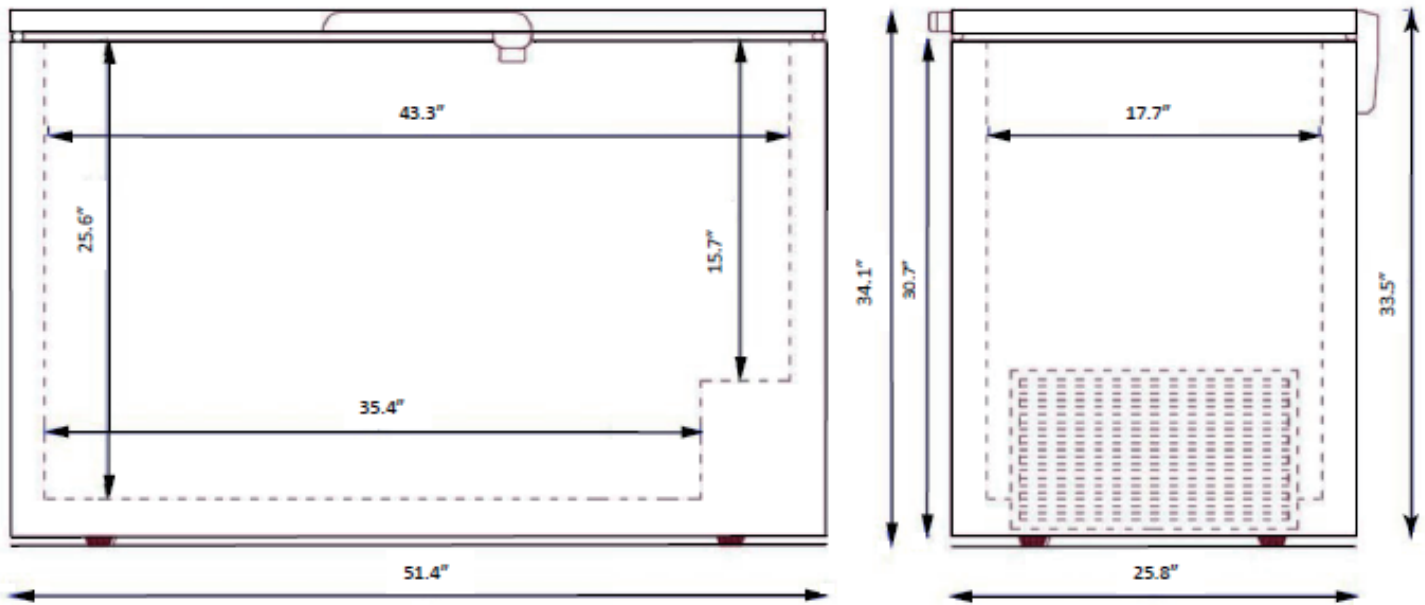

Notice: Since Taiko Enterprise Corp. continues to research and improvement, specifications and dimension are subject to change without notice. Taiko reserves the right to change the product design such revisions do not entitle the buyer to corresponding change, improvements, additions or replacements for previously purchased equipment.



TAIKO ENTERPRISES CORP.

Taiko Enterprise Corporation since 1990

[Los Angeles]

1467 178th St.
Gardena, CA 90248
Phone: (310)715-1888
Fax: (310)324-1115

[New York]

110 W 40th St.
#1604, New York
NY 10018
Phone: (212)757-5920
Fax: (212)757-5921

[Texas]

6817 K Ave.
Suite 101, Plano
TX 75074
Phone: (972)398-6868
Fax: (972)797-3329

[Hawaii]

720 Iwilei Rd.
Unit 30, Honolulu
HI 96817
Phone: (310)756-2327