OceanLED
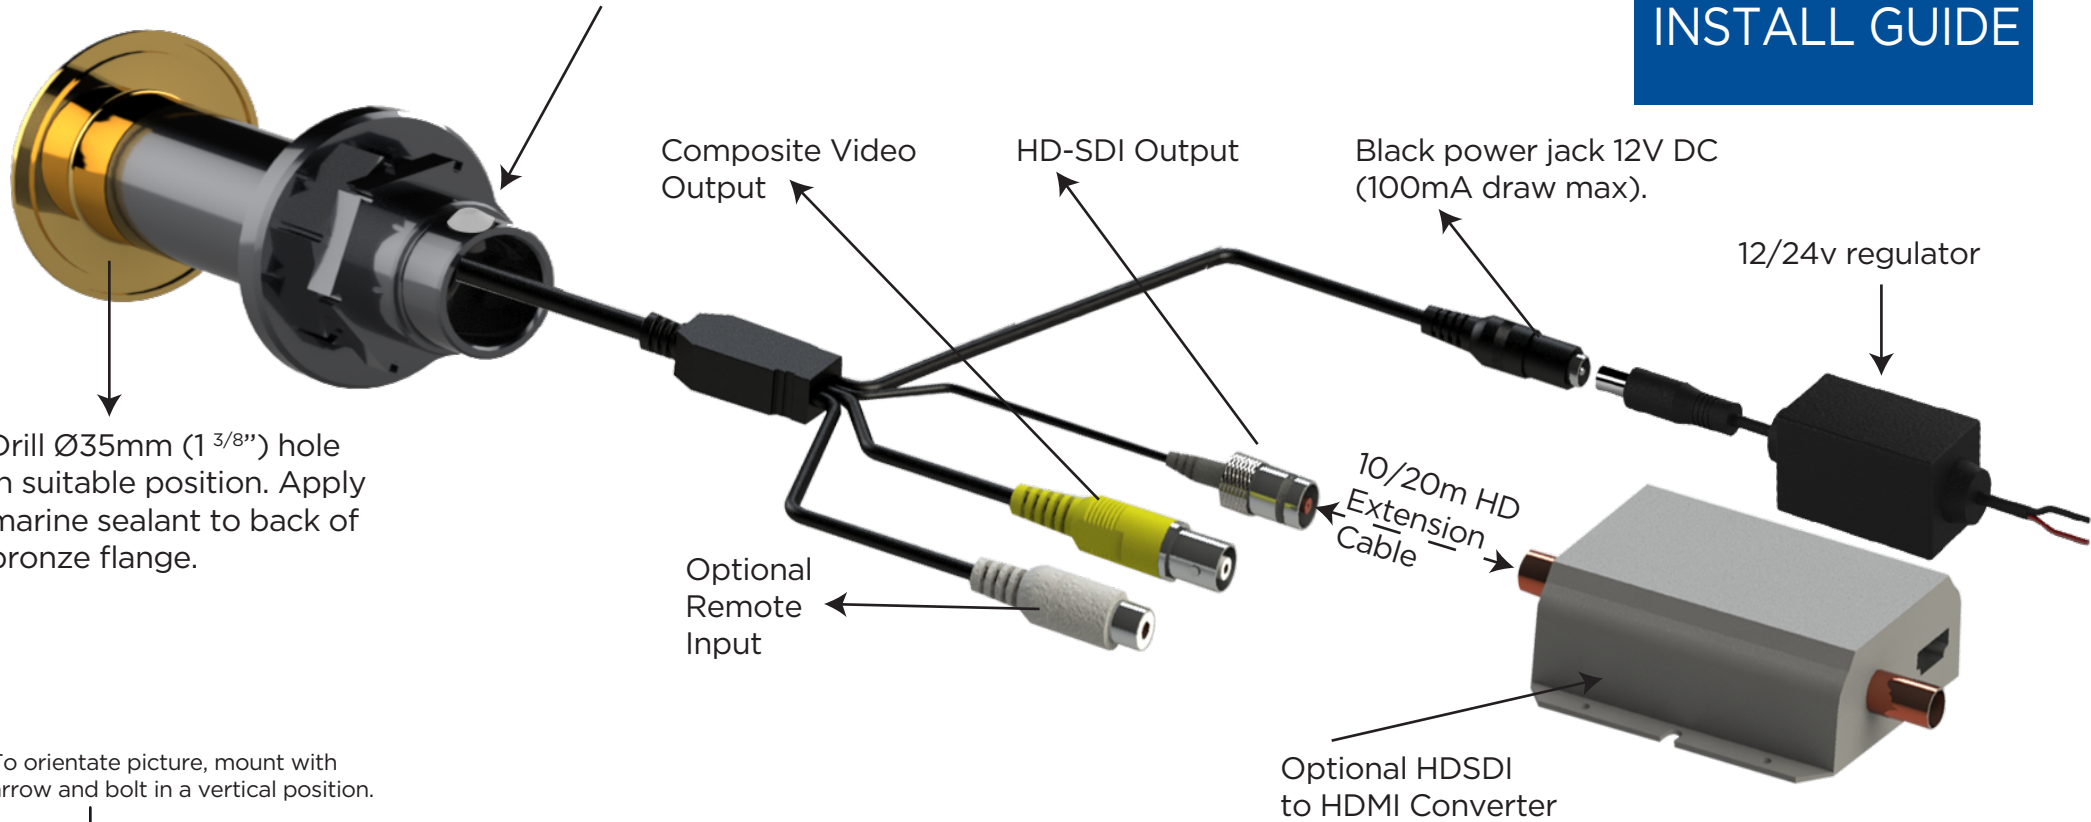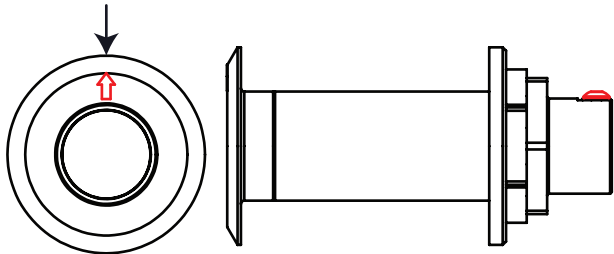
EYES HD GEN2 INSTALL GUIDE

Earth bonding point.
Ensure vessels cathodic protection system is connected to this earth bonding point.

Composite Video Output

HD-SDI Output

Black power jack 12V DC (100mA draw max).

12/24v regulator

Drill Ø35mm (1 ³/₈") hole in suitable position. Apply marine sealant to back of bronze flange.

10/20m HD Extension Cable

Optional Remote Input

Optional HDSDI to HDMI Converter

To orientate picture, mount with arrow and bolt in a vertical position.

Earth bonding point.
Ensure vessels cathodic protection system is connected to this earth bonding point.

PLEASE ENSURE CONNECTIONS ARE MADE AND MAINTAINED IN A WATERPROOF ENVIRONMENT