

Catalog Number UPC Number Description

01068 60198601068 Vinyl Insulated Ring Terminal 12-10


Features


- Color Coded insulation for easy identification
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Easy entry expanded insulation eliminates strand "Hang Up", increases the crimping rates and the reliability of the termination
- Wire range stamped on the surface for easy interpretation
- Butted seams prevent splitting under maximum pressure
- Serrated barrel & flared position of sleeves provide excellent contact & mechanical stress relief at insulation & barrel junction
- Packed in Zip Lock plastic bags with punched hole for pegboard


ansulation TypeVinylMaterialCopper Tubular/Copper PlateinishElectro-Tin PlatedolorYellowVire Range12-10tud Size5/16Immension Information0.039Inches (mm)1.382Olnches (mm)0.134
MaterialCopper Tubular/Copper PlateinishElectro-Tin PlatedolorYellowVire Range12-10tud Size5/16Immension Informationtock Thickness0.039Inches (mm)1.382O Inches (mm)0.248O Inches (mm)0.134
inish Electro-Tin Plated olor Yellow Vire Range 12-10 tud Size 5/16 Simension Information tock Thickness 0.039 Inches (mm) 1.382 Inches (mm) 0.248 Of Inches (mm) 0.134
olor Yellow Vire Range 12-10 tud Size 5/16 imension Information 0.039 Inches (mm) 1.382 Inches (mm) 0.248 Inches (mm) 0.134
Vire Range12-10tud Size5/16 Imension Information tock Thickness0.039Inches (mm)1.382Inches (mm)0.24811 Inches (mm)0.134
tud Size 5/16 Simension Information tock Thickness 0.039 Inches (mm) 1.382 O Inches (mm) 0.248 O Inches (mm) 0.134
imension Informationtock Thickness0.039Inches (mm)1.382Inches (mm)0.2481 Inches (mm)0.134
tock Thickness 0.039 Inches (mm) 1.382 Inches (mm) 0.248 1 Inches (mm) 0.134
Inches (mm) 1.382 Inches (mm) 0.248 1 Inches (mm) 0.134
Inches (mm) 0.248 1 Inches (mm) 0.134
1 Inches (mm) 0.134
2 Inches (mm) 0.331
Inches (mm) 0.555
Inches (mm) 0.531
V Inches (mm) 0.591
Inches (mm) 0.039
pecifications
emperature Rating 167 ⁰ F (75°C)
oltage Rating 600 V @105°C
lammability Rating UL94V-O
mp Rating 50 Amps
ackaging
ag Qty 25
Naster Bag Qty 100
ertifications
IL Yes
UL Yes
oHS Yes


Morris Products 53 Carey Road, Queensbury, NY 12804 www.morrisproducts.com





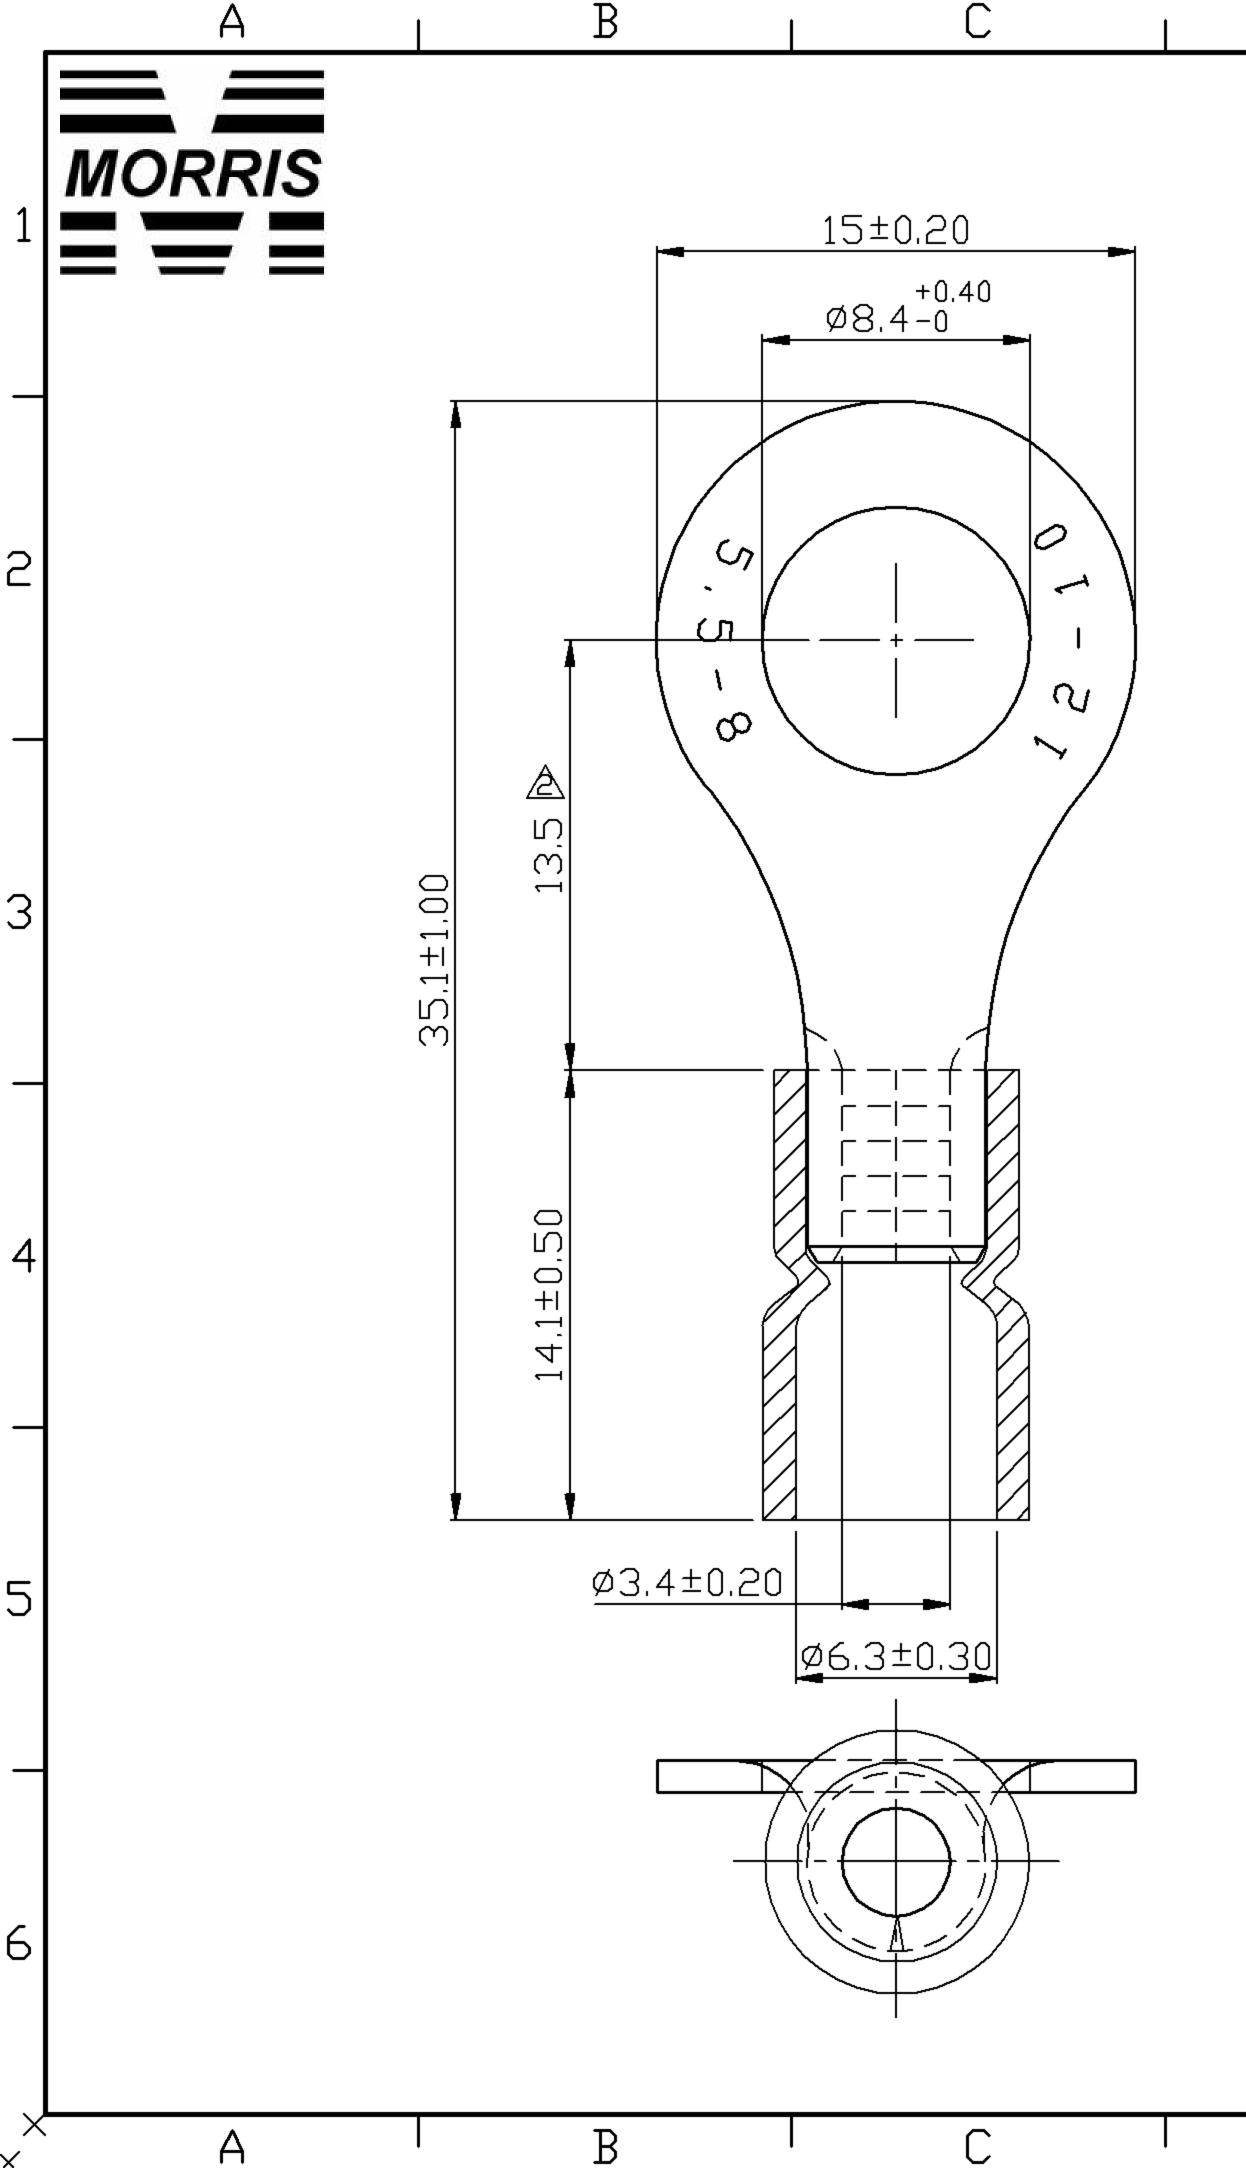

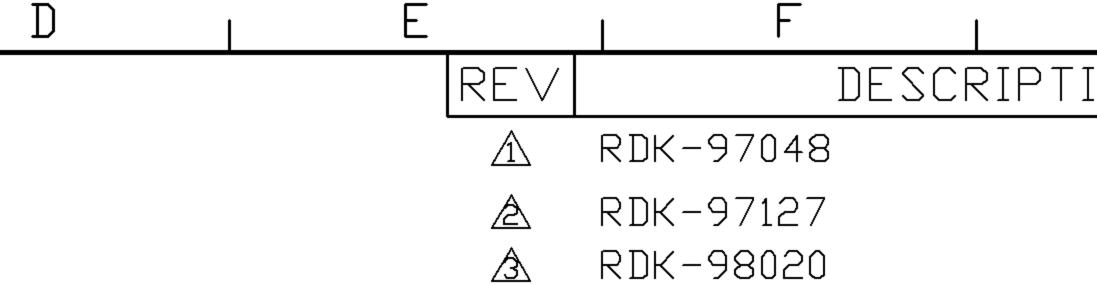

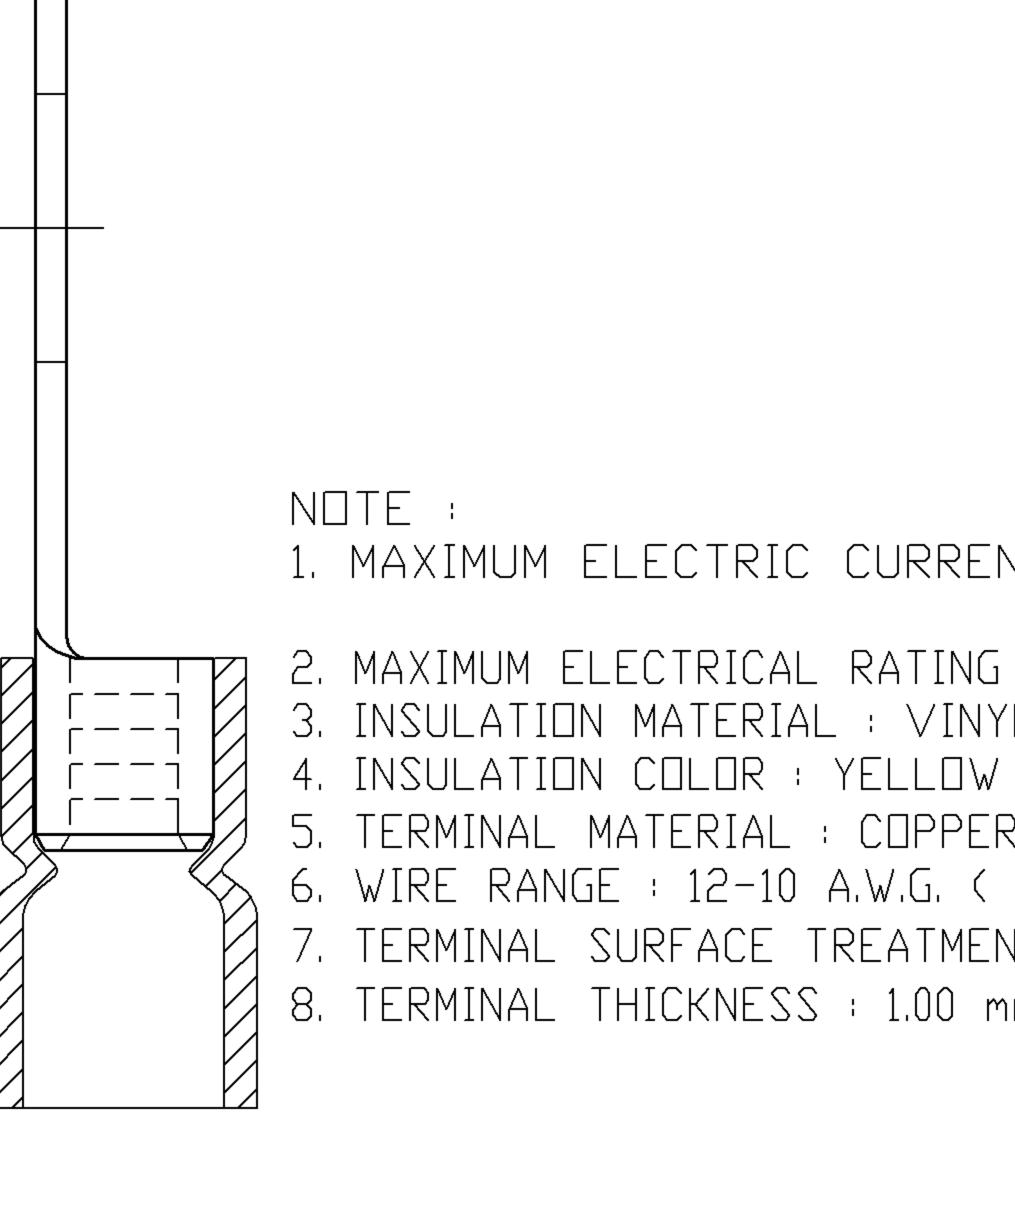

Д

F

NAME	VINYL-INSUL RING TERM	ATED (E 1INALS	EAS
PART NO.	01068	MATERIAL	
NUMBER	. ,	SCALE	SH
DATE	2007/04/16	3/1	1-
	Products Inc. y Rd. Queens	bury, N	17

G	Н	× X
ION	DATE	
	2008/08/15 2008/08/15 2009/08/21	1
		2
NT; <u>A.W.G.</u> AMP.	12 10 35 50	3
$\langle 1 \rangle$) VOLTS MAX.	
R 4 - 6 mm ²		4
NT : TIN PL: mm		
0 > mm : > mm :	erance Unless <u>rwise Specified</u> <u>± 0°> ° REF±</u> ± 0°> ° ±	5
	± °> ° ± T mm © E	
EET PAGE CHECK 3 10F2 DRAV	(ED	6
12804		

12804

L	1	1
Ľ	' ł	┥