

100W Color Changing Outdoor Area Light

User Manual

01 / WARNING

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

1. Fixtures must be wired following the National Electrical Code and all applicable local codes. Proper grounding is required for safety.
2. THIS PRODUCT MUST BE INSTALLED FOLLOWING THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THIS PRODUCT AND THE HAZARDS INVOLVED.
3. **WARNING:** Make certain the power is TURNED OFF before installing or maintaining this fixture.


02 / PACKAGE CONTENT

100W color changing outdoor area light × 1


Wire nuts × 5

03 / INSTALLATION


1. TURN OFF THE POWER. Then, unscrew the junction box and remove the cover of the junction box.

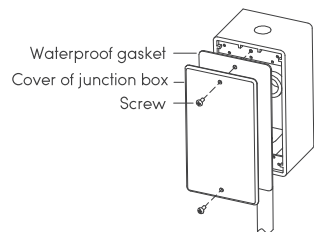



2. Place the lamp wires inside the junction box.

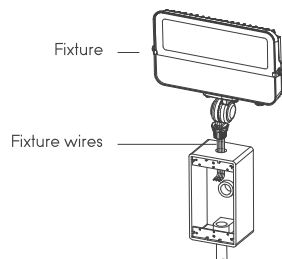


3. Screw the knuckle mount onto the junction box.




4. Connect the supply wires with the fixture wires using wire nuts. Connect the black wire to the live wire, the white wire to the neutral wire, and the green wire to the ground wire.

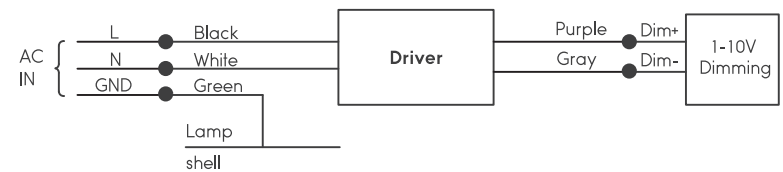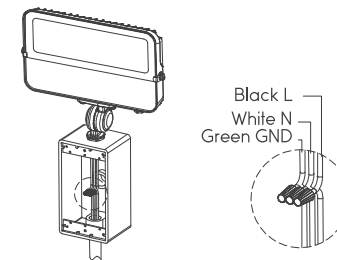


5. Screw the cover back on the junction box.

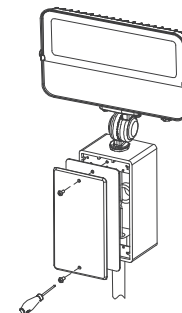


6. Loosen the knuckle mount using a hexagonal screwdriver (not included).

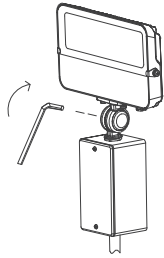

7. Adjust the fixture to desired angle.

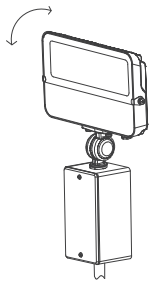


8. Tighten the knuckle mount. The installation is now complete. Turn the power back on.

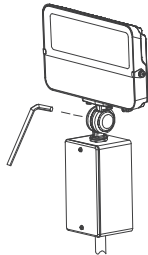

O4 / HOW TO USE

Adjust the color temperature of the product by shifting the gear.

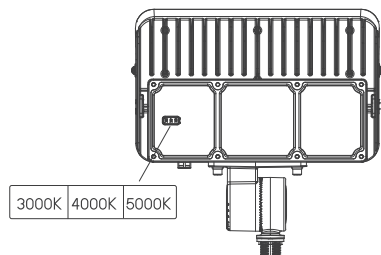

O5 / SPECIFICATIONS

100W Color Changing Outdoor Area Light	
Power	100W
Voltage	120V
Working temperature	-40°F-104°F
Luminous flux	13000lm
Color temperature	3000K/4000K/5000K
Material	Aluminum
Dimming type	1-10V
Beam angle	110°

O6 / COMPATIBLE DIMMER LIST

LUTRON: Diva

LEVITON: IP710, DS710

COOPER: HIWAC1BLE40AWH

O7 / WARRANTY

LEONLITE warrants that this product is free from defects in materials and workmanship for a period of 5 years from the day of purchase. If the product has been misused, damaged by accident or in any other way of improper use, this warranty becomes void.

LeonLite