

CAT6 HIGH GRADE 550MHz UTP (STRANDED)



DESCRIPTION

Category-6, 24AWG, UTP, 8C Stranded Bare Copper, 550MHz, PVC Jacket 1000ft.

FEATURES

- High-Performance Data Cable
- 550MHz Bandwidth for Data Applications, Fast Ethernet and 155Mbps TP-PMD/CDDI
- Category-6 Unshielded Twisted Pair
- Easily Identified Color-Striped Pairs
- Exceeds ANSI/TIA-568-C.2, ISO/IEC-11801
- 1000ft Pull Box

SKU: 063 SERIES

Technical Data

Rated Temperature (°C)	70
Rated Voltage (V)	30
Product Standard Certification	CM
Flammability Test	IEC-332-1

Conductor

Stranded Bare Copper

Size 24 AWG

Insulation PE

Average Thickness (mm) 0.20

Insulation Diameter (±0.005mm) 0.98

Twisted Pair Diameter (±0.01) 1.96

Separator No

Assembly Diameter 4.80

Jacket PVC

Average Thickness (mm) 0.60

Min. Point Thickness (mm) 0.54

Outer Diameter (±0.10mm) 6.20

Rip Cord Yes

Color of Pairs


Pair 1	Blue,White-Blue
Pair 2	Orange,White-Orange
Pair 3	Green,White-Green
Pair 4	Brown,White-Brown

Marking on Jacket

VERTICAL 4001453 cETLus VERIFIED CM UTP 4PR 24AWG
CAT6 550MHz ANSI/TIA-568-C.2 STRANDED RoHS XXXFT
(SEQUENTIAL FOOT MARKERS ON JACKET)

Jacket Color Available in:

Black, Blue, Gray, Red, White, Yellow, Green, Orange

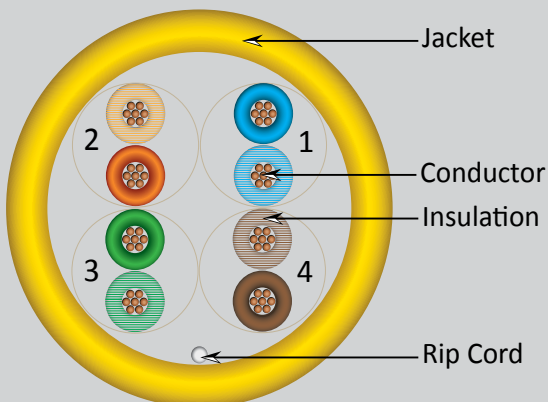

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 01/2018

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.

CAT6 HIGH GRADE 550MHz UTP (STRANDED)

PERFORMANCE

Electrical Characteristics:

1.0-550MHz Impedance (Ohms)	100±15
1.0-550MHz Delay Skew (ns/100m)	≤45
Pair-to-Ground Capacitance Unbalance (pF/100m)	≤330
Max. Conductor DC Resistance 20°C (ohms/km)	95
Resistance Unbalance (%)	≤5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next (ns/100m)
0.772	19.4	1.8	76.0
1	20.00	2.0	74.3
4	23.0	3.8	65.3
8	24.5	5.3	60.8
10	25.0	6.0	59.3
16	25.0	7.6	56.2
20	25.0	8.5	54.8
25	24.3	9.5	53.3
31.25	23.6	10.7	51.9
62.5	21.5	15.4	47.4
100	20.1	19.8	44.3
200	18.0	29.0	39.8
250	17.3	32.8	38.3
400	14.8	44.2	35.3
500	14.2	52.8	33.2

Frequency (Mhz)	PSNext (Min dB)	ELFEXT Min(db/100m)	Delay Max(ns/100m)
0.772	74.0	70.0	-----
1	72.3	67.8	570.0
4	63.3	55.8	552.0
8	58.8	49.7	546.0
10	57.3	47.8	545.0
16	54.2	43.7	543.0
20	52.8	41.8	542.0
25	51.3	39.8	541.0
31.25	49.9	37.9	540.0
62.5	45.4	31.9	538.0
100	42.3	27.8	537.0
200	37.8	21.8	536.0
250	36.3	19.8	536.0
400	33.2	15.8	535.0
550	31.2	13.0	533.0

VERTICAL CABLE

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



www.verticalcable.com

Rev. 01/2018

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.