

RG59 SIAMESE 95% CCA BRAID COAXIAL CABLE (CMP RATED)




SKU: 107-2319/P/WH

DESCRIPTION

RG59 Siamese, Bare Copper Conductor Coaxial Cable with 95% CCA Braid and 18/2 Power Cable, CMP Rated.

FEATURES

- RG59 Type Coaxial Cable with One Pair of 18AWG Power Cable
- 20AWG Bare Copper Conductor For Optimal Signal Transmission
- 95% Copper Clad Aluminum Braid for Signal Protection
- Unshielded 18AWG Stranded Power Cables
- Indoor Cable Application for: CCTV
- UL Listed, RoHS Compliant, ISO9001:2000
- Available in a 1000ft Wooden Spool

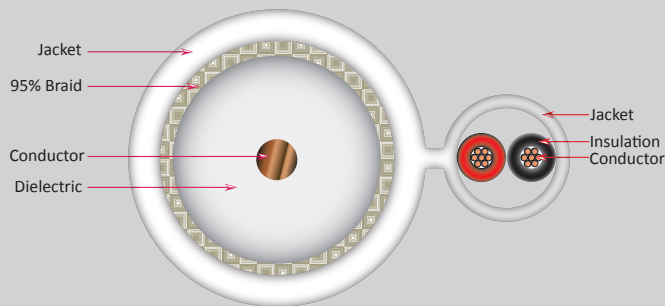

Inter Conductor	Coaxial	18-2
Size	20 AWG (1)	18 AWG (2)
Material	Solid Bare Copper	Bare Copper
Core Dia.	0.135 in (3.43mm)	----
Stranding	----	7x.0152in (7x.386mm)
Shielding	95% Copper Clad Aluminum Coverage (Coax only)	
Nom. Diameter	.154in (3.91mm)	
Dielectric		
Material	Foam FEP	
Color	White	
Dia.over Dielectric	.135in (3.43mm)	
Insulation		
Material		Plenum PVC
Color		Red/Black
Dia.over Insulation		.06in (1.52mm)
Jacket		
Material	Plenum PVC	
Color	White	
Diameter over Jacket (Coax)	.201 in.(5.1mm) Nom.	
Nominal Thickness	0.018 in. (0.46mm)	
Diameter over Jacket (18-2)	0.150 in.(3.8mm) Nom.	
Operating Temp	-20° C ~ +75°C	
Sparker Test	2500V	
Capacitance	16.0pF/FT.Nom. 52.5pF/m.Nom	
Impedance	75.0±3.0 Ohms	
Velocity of Propagation	84.0% Nom.	
DCR: Coax:	10.5 Ohms/1000ft	
	34.4 Ohms/Km (Nom)	
	18-2: 6.6Ohms/1000ft	
	21.7Ohms/Km (Nom)18 AWG	
SRL:	20dB(1 - 300MHz) 100% Swept Tested	
Shield Coverage	95% CCA Braid	
Cable Rating	CMP	

Attenuation:		
Frequency (MHz)	dB/100ft.(Nom.)	dB/100m.(Nom.)
1MHz	0.34dB	1.11dB
10MHz	1.05dB	3.44dB
100MHz	3.60dB	11.80dB
200MHz	5.20dB	17.05dB
400MHz	7.70dB	25.25dB
700MHz	10.80dB	35.41dB
900MHz	12.40dB	40.66dB
1000MHz	13.20dB	43.28dB

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 11/2014

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.