



# Structured Cable Products™


Quality Installations Deserve Quality Products

www.spcat5e.com  
 sales@scpat5e.com  
 Direct: 954-327-5770  
 Toll Free: 866-470-5742

**SCP PART#: 14/2SP-41-YL** UPC: 810070010225

**DESCRIPTION:**

2C/14 AWG 41 STRAND SPEAKER CABLE, PVC JKT- YELLOW- 500 FT BOX

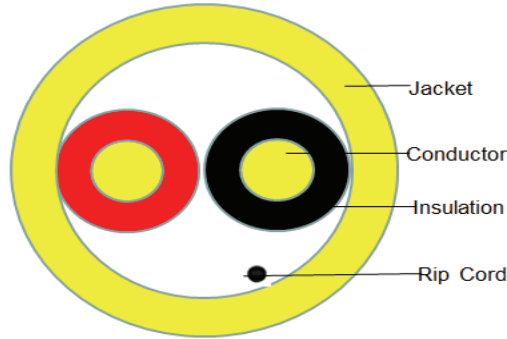

**Regulatory**

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)  
 EU RoHS 2011/65/EU Compliant  
 EN50575: 2014 REACTION TO FIRE CLASS Dca

**Application:** Speaker Cable

**Construction Characteristics:**

Conductor	Material	Stranded Bare Copper
	Size	14AWG X 2C(2.11mm <sup>2</sup> )
	Construction	41/0.254mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	2.60mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.50mm
	AVG.Thickness	0.60mm
	Diameter	6.4mm +/-0.20mm
	Rip Cord	Nylon
	Color	Yellow
Bend radius	Min 15D/95mm	

**Electrical & Physical Characteristics:**

Operating Temperature Range	- 20°C + 75°C
Installation Temperature Range	0°C + 40°C
Conductor Resistance	Max 9.2ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	Max 80Volts

**Marking:**

STRUCTURED CABLE PRODUCTS -- 14/2SP-41 -- E198137 SCP3 (UL) CL3 C(UL) CMR 2C  
 14AWG 41 STRAND OXYGEN FREE COPPER - EN50575:2014 CE Dca PVC JKT FT4 75C RoHS  
 ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
10.8kgs/23.810lbs	320X260X320	500FT/BOX	36/48
21.8kgs/48.060lbs	360X200X160	1000FT/SPOOL	36