

SCP PART#: 16/4FPLP-SH

Rev06/23

Description:


4C/16AWG SOLID SHIELDED FPLP PLENUM- RED- 1000 FT SPOOL

Regulatory

UL STANDARD 444 & UL 13 & UL 1424, FPLP OR CL2P/CL3P
 OR (UL) c(UL) CMP FT6

Application

Fire Alarm Cable

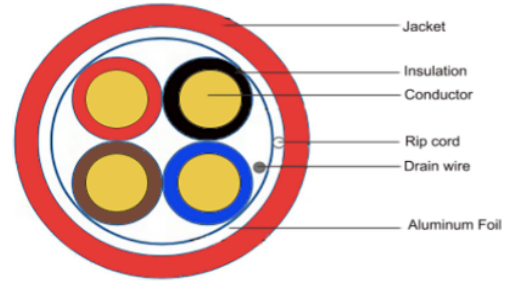

Construction Characteristics:

Conductor	Material	Solid Bare Copper
	Size	16AWG*4C
	Construction	1.29+/-0.005mm
Insulation	Material	FRPVC
	Min. Thickness	>=0.25mm
	AVG.Thickness	>=0.29mm
	Diameter	1.79+/-0.10mm
Colors	Red,Black,Brown,Blue	
Jacket	Material	FRPVC
	Min. Thickness	>=0.33mm
	AVG.Thickness	>=0.38mm
	Diameter	5.30 +/-0.20mm
	Rip Cord	Yes
	Drain Wire	Red 7*0.2mm
	AL Foil	Yes
	Color	Red

Electrical & Physical Characteristics

Operating Temperature Range		-20°C ~ +75°C
Voltage Rating		300 Volt RMS
DCR Conductor		<=4.179 Ohms/1000 FT. at 25°C
Capacitance(Cond-Cond)		65 pF/ft(Nominal)@ 1kHz
Insulation voltage		Vrms (Maximum) 1.5K
Insulation	Tensile Strength	>=10.3Mpa
	Elongation	>=100%
Jacket	Tensile Strength	>=10.3Mpa
	Elongation	>=100%

Markings

STRUCTURED CABLE PRODUCTS INC --- P/N 16/4FPLP-SH--- PLENUM FIRE ALARM CABLE --- 4C/16 AWG SOL BC SHIELDED (UL) FPLP E324624-SCP7 OR CL2P/CL3P OR (UL) c(UL) CMP FT6 75C LS-PVC JKT --- ROHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 XXX FT LOT # 0502160

Packaging

Approx Weight	Approx Dimension (Spool)	Package	Spools per pallet	Pallet weight
23.7kg/spool	30x13.5x23cm	1000ft/spool	36 spools	853.2kg