Lit Up Lighting Inc

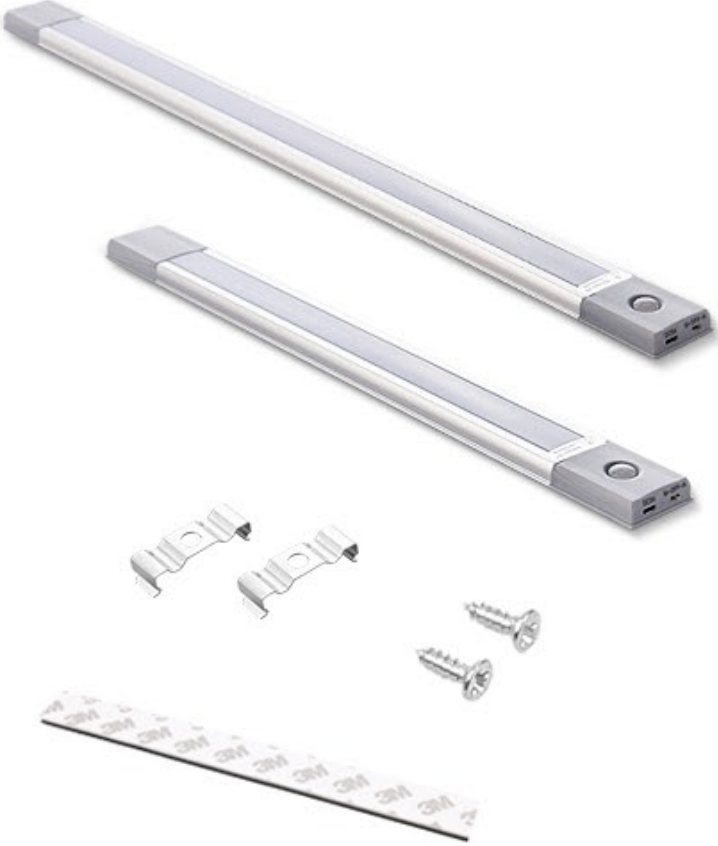

Series : Huron

Lamp Power: 1.2W / 1.6W

Charge voltage: DC5V 1A/2A

Switch Type: Body Sensor+Light Sensor
+Section Switch

Induction angle: 120°

LED Light Source: SMD 2835

Number of chips: 24pcs(1.2W) / 40pcs(1.6W)

Sensor Distance: 2M

Size: 1.2W(D40*H12*400mm)
1.6W(D40*H12*600mm)

Beam Angle: 120°

Install style: Surface Mounted

Style: UC1915 WH-3K for 40Cm in 3000k
UC1915 WH-4K for 40cm In 4000K
UC1924WH-3K for 60CM in 3000k
UC1924WH-4K for 60CM in 4000k

Body/Light Sensor Cabinet Light

AUTO ON/OFF

Induction angle:120°
Sensor Distance:0-2M

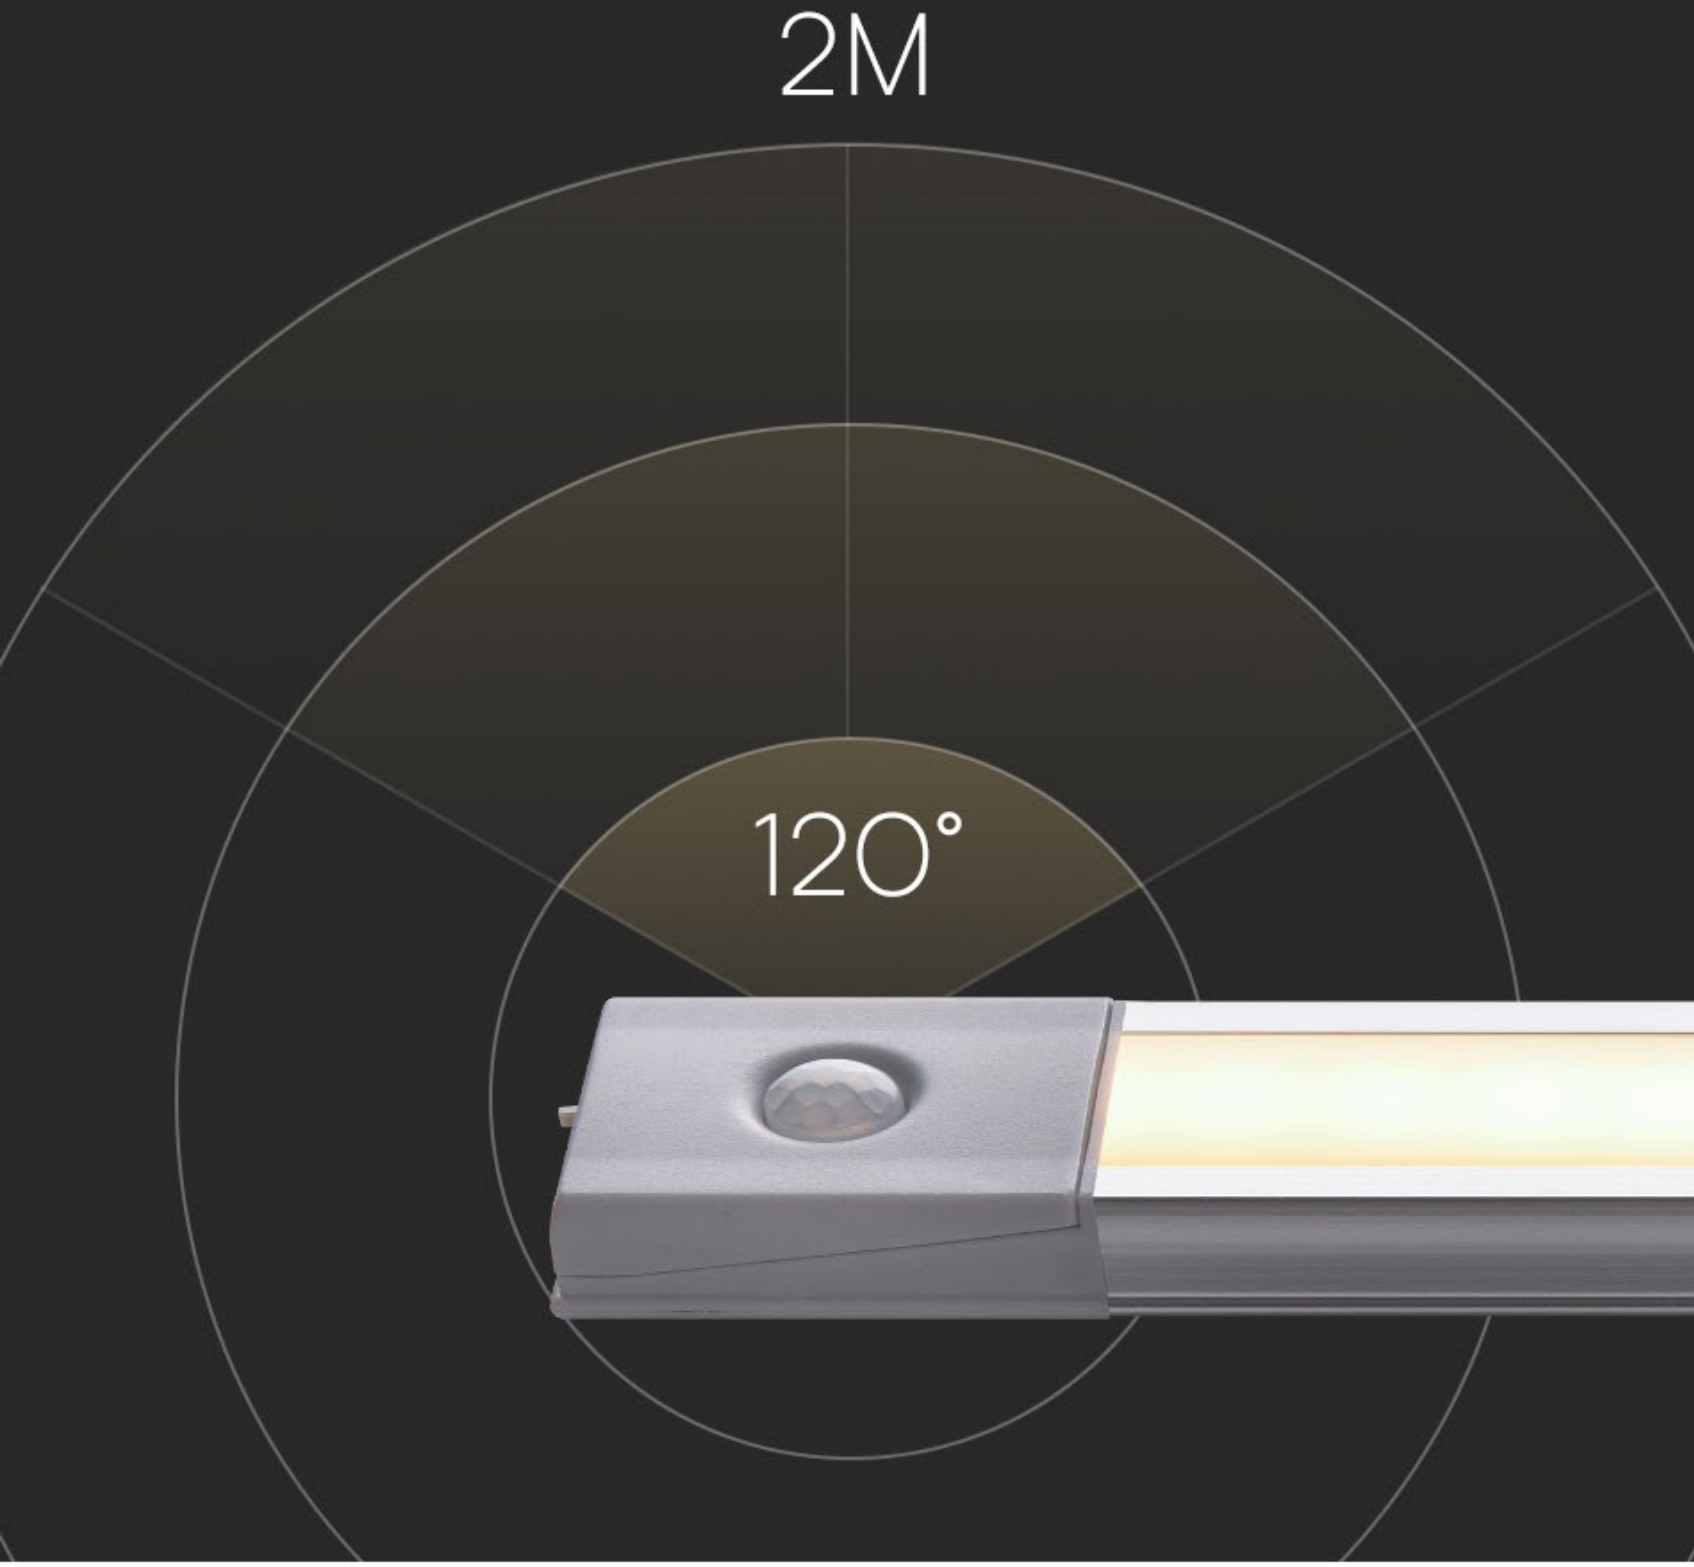

When people leave,
it will light off with 10-15s delay

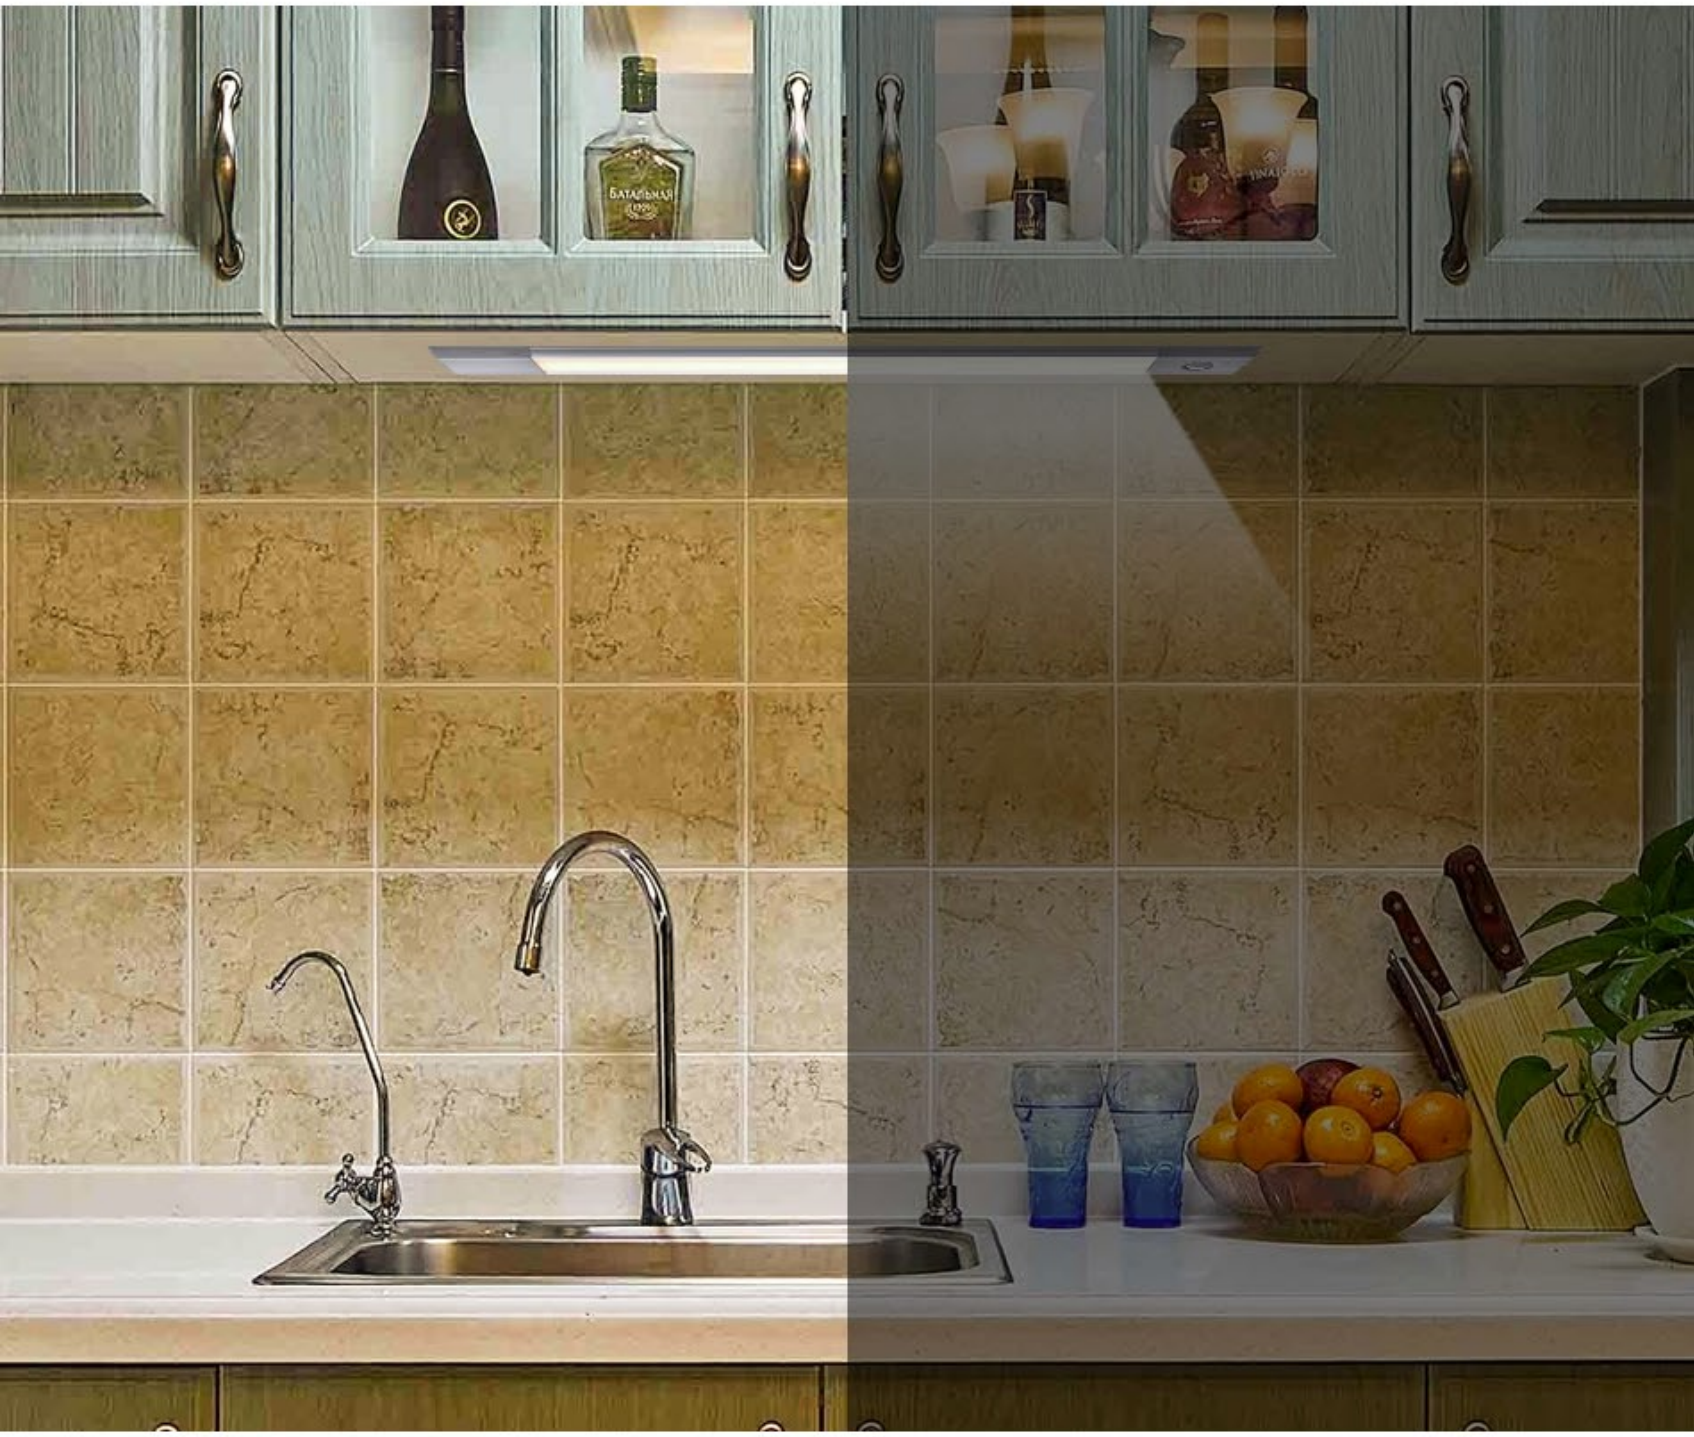

It can not work at daytime

When people close to it will light on at night

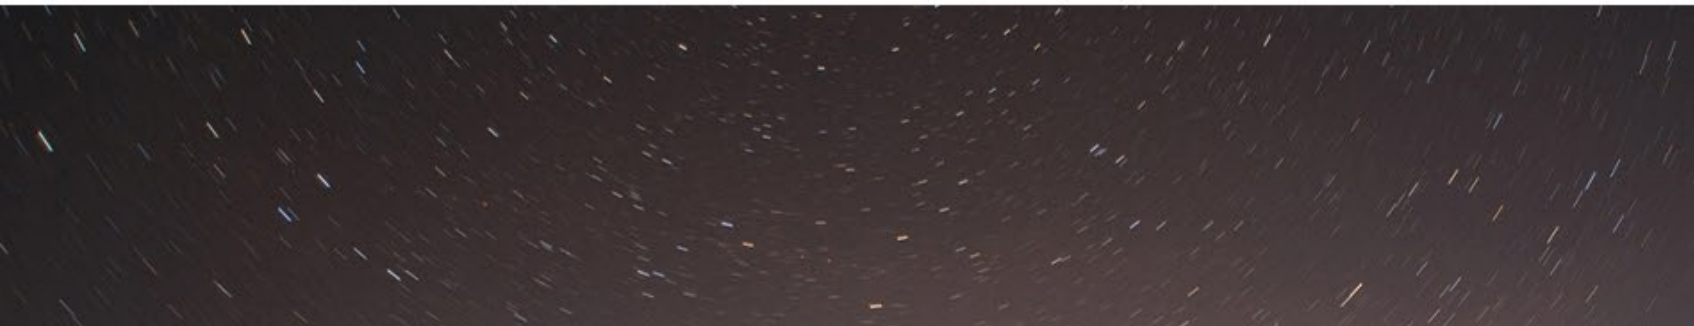

Power failure emergency,
Fully charge for portable and outdoor lighting

2 Install types,no need connect wire,
freely to any place

Screws install

3M Glue Install

USB Charge,

Compatible with most phone

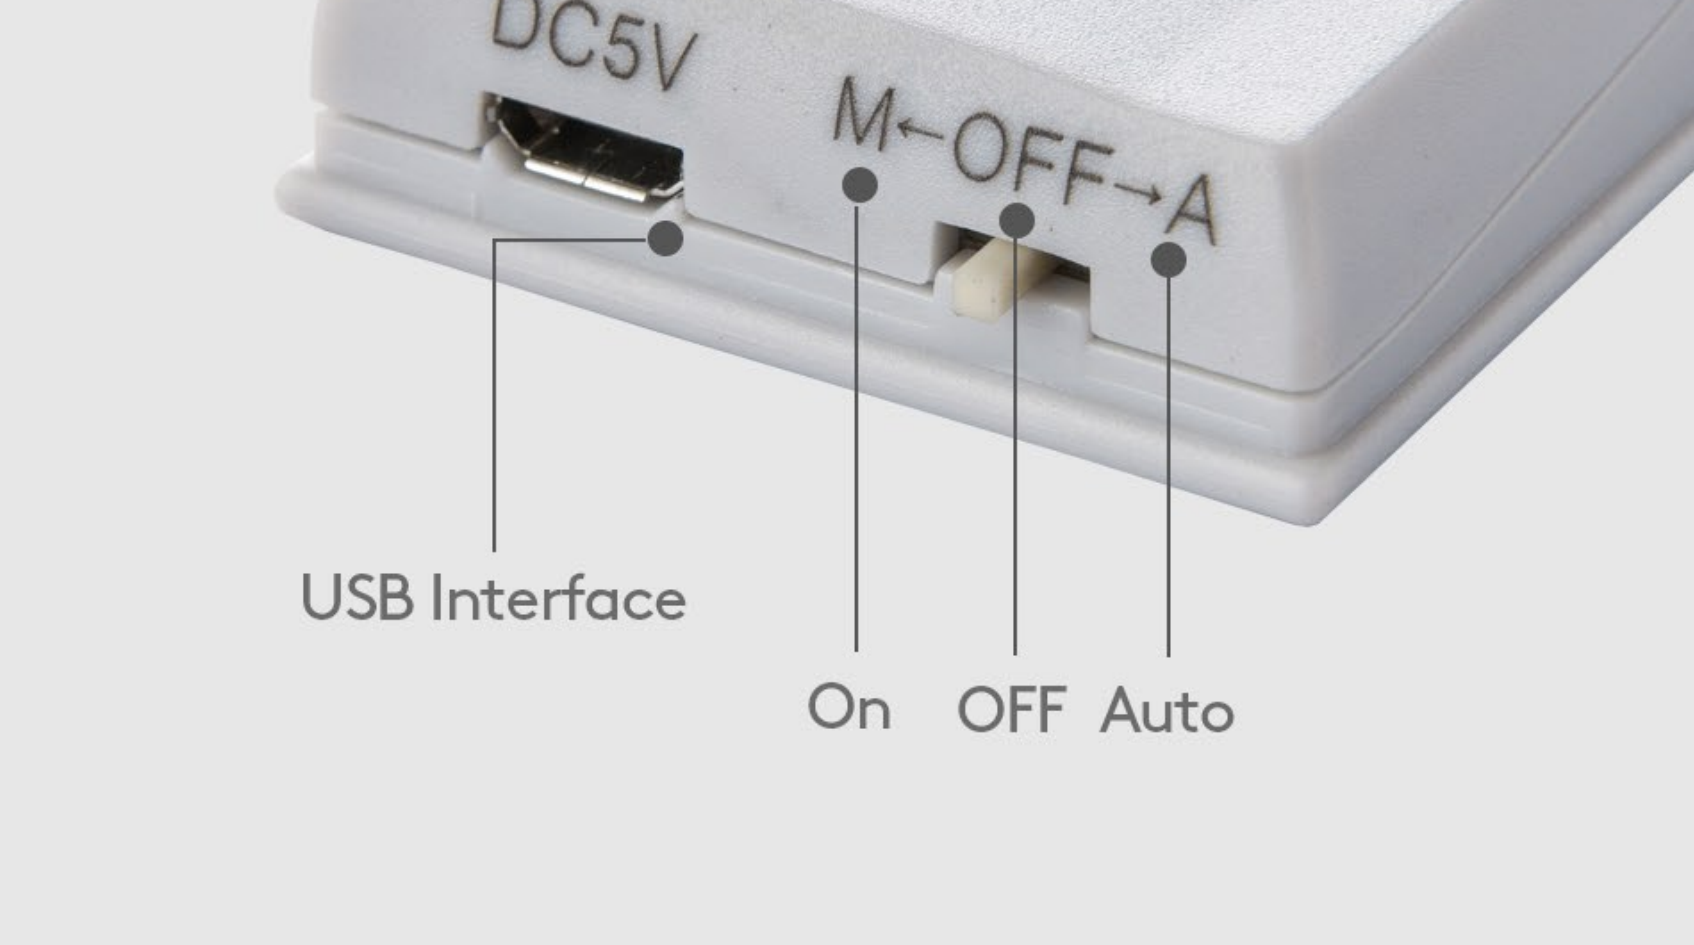
DC5V
M←OFF→A
USB Interface
On
OFF
Auto

PC USB Socket
Mobile power
USB Charge Socket

CE LVD EMC RoHS

landelijke vereniging van operatieassistenten

CRI:70

CRI:80

CRI:90

Cold White

Natural White

Warm White

Size

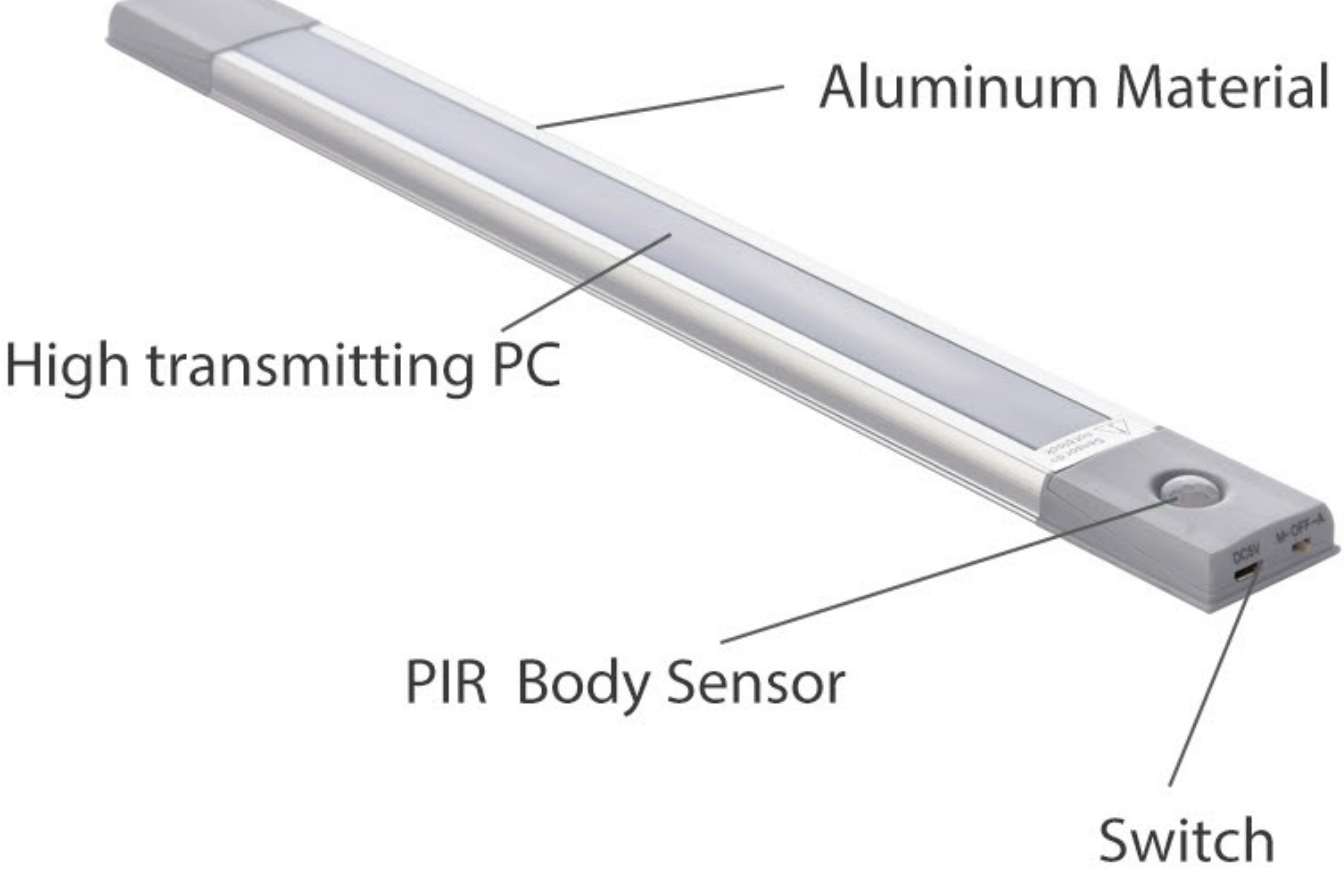
Aluminum Material
High transmitting PC
PIR Body Sensor
Switch
DC5V
M-OFF-A

UC1915 WH-3K for 40Cm in 3000k
UC1915 WH-4K for 40cm In 4000K

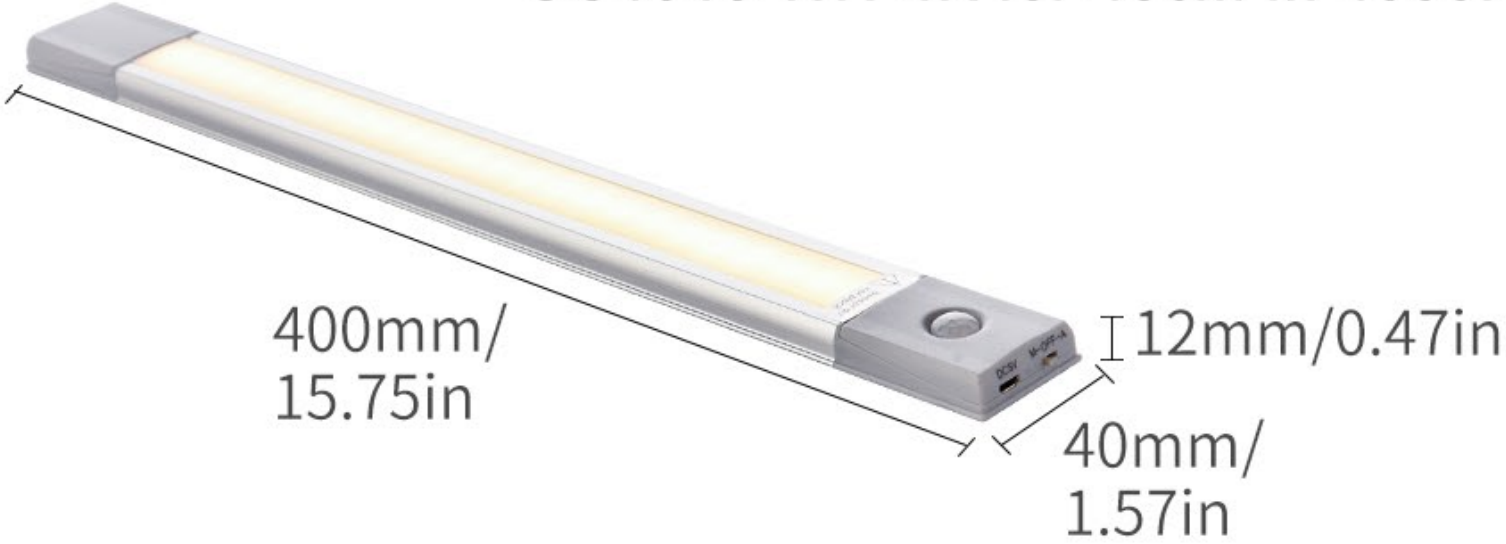
400mm/
15.75in
12mm/0.47in
40mm/
1.57in
DC5V
M-OFF-A

UC1924WH-3K for 60CM in 3000k

UC1924WH-4K for 60CM in 4000k

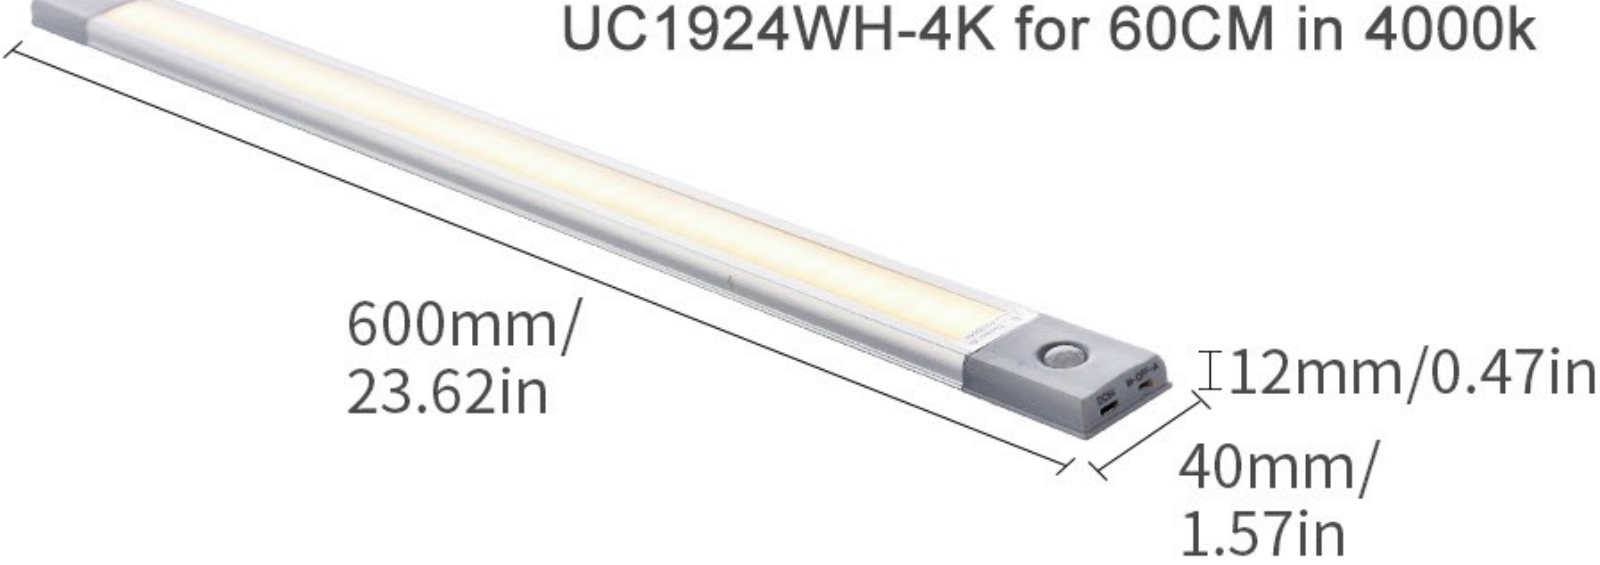
600mm/
23.62in
12mm/0.47in
40mm/
1.57in
DC5V
M←OFF→A

Product details

Gold Lines Chip,CRI>90

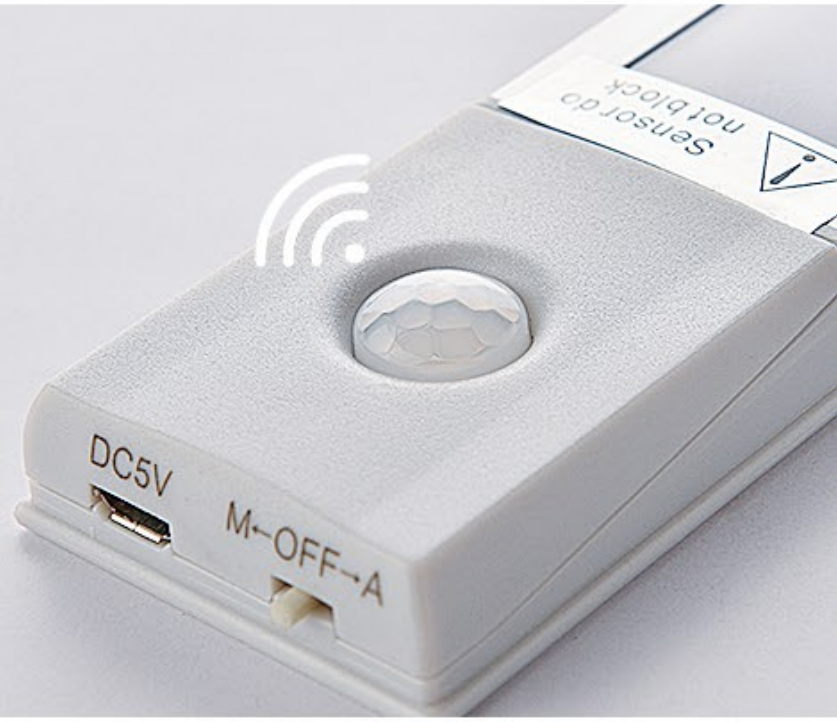
Sensor do
not block
DC5V
M←OFF→A

PIR Body Sensor

Aluminum material

High transmitting PC

Product pictures

DC5V
M–OFF–A
DC5V
M–OFF–A

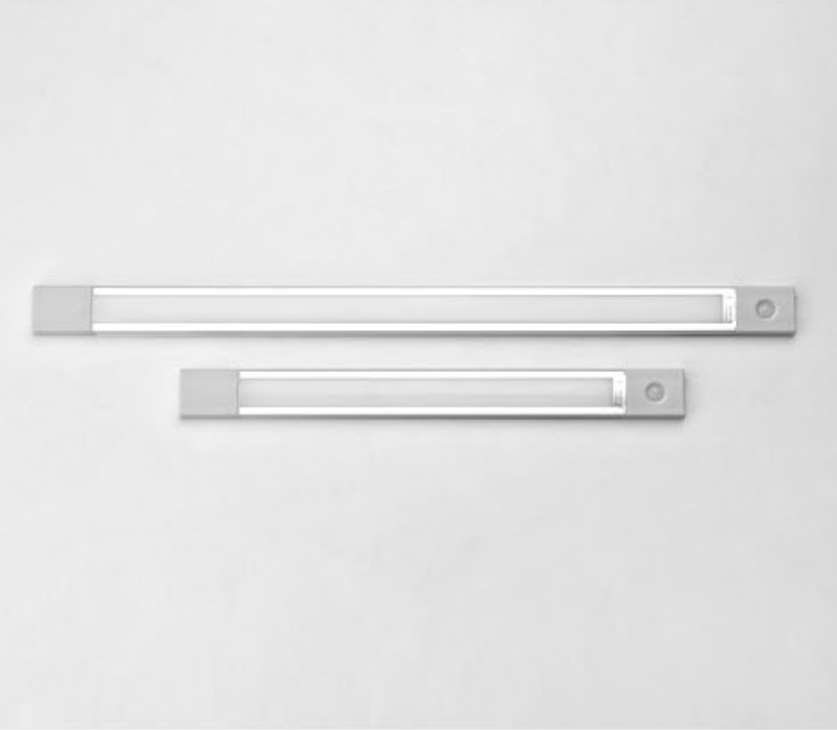

Application

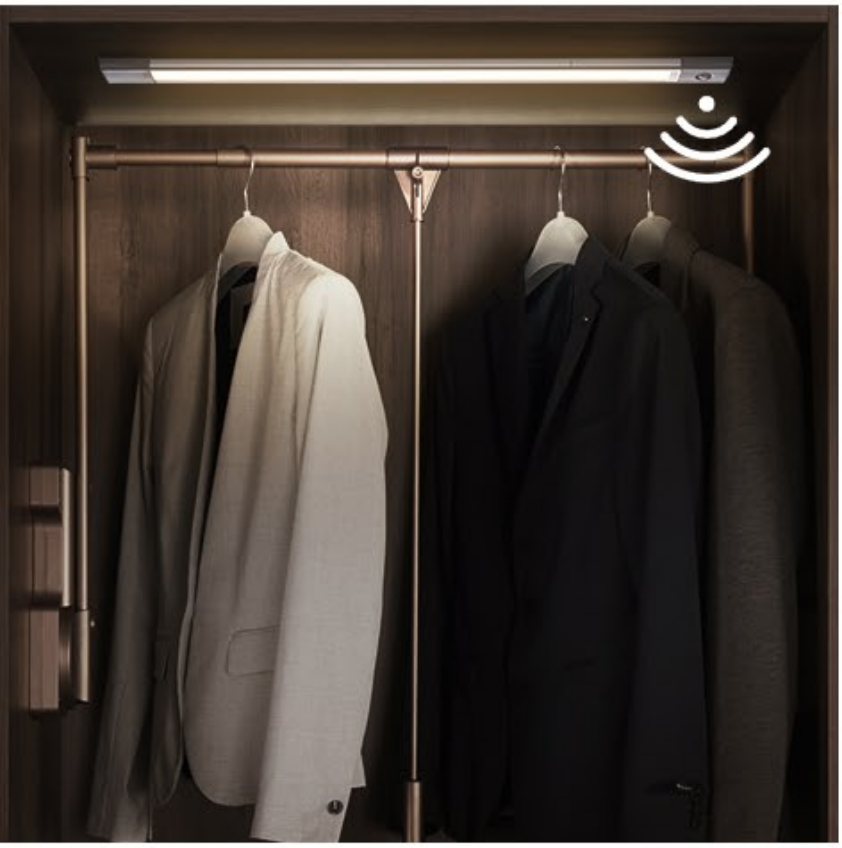

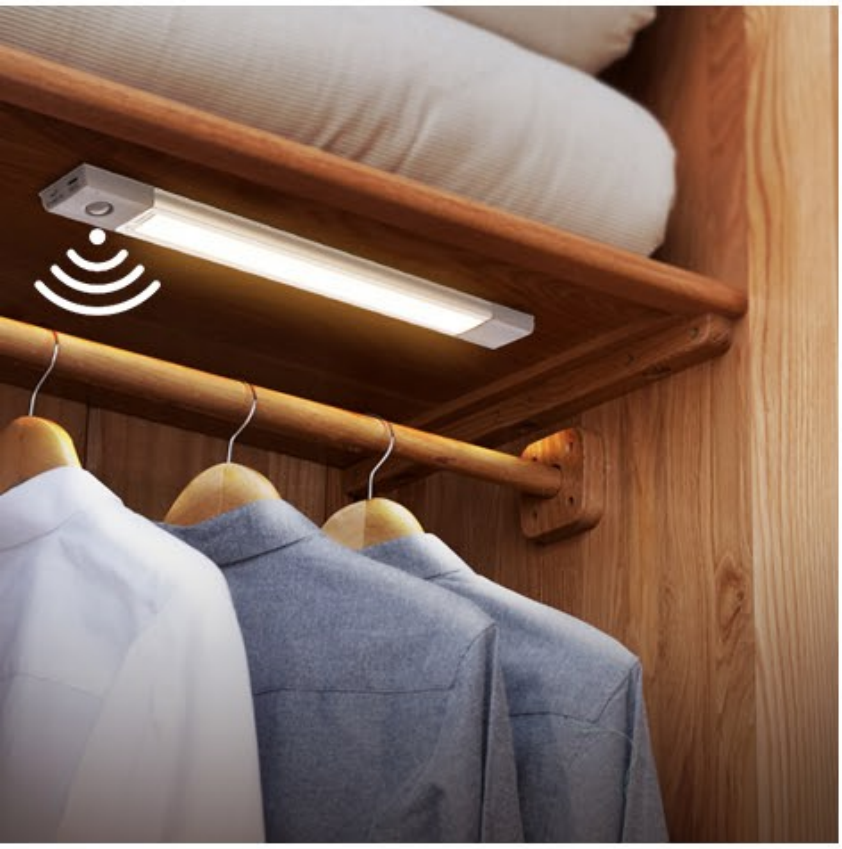

Installation instructions

1

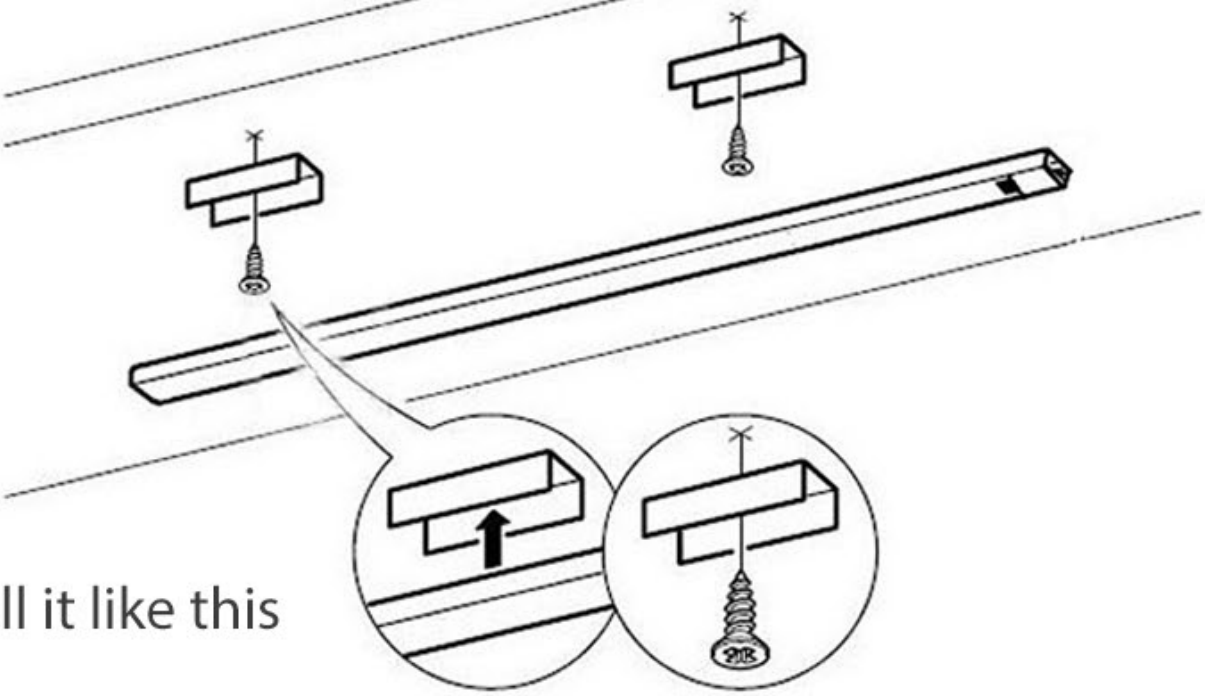

install it like this

2

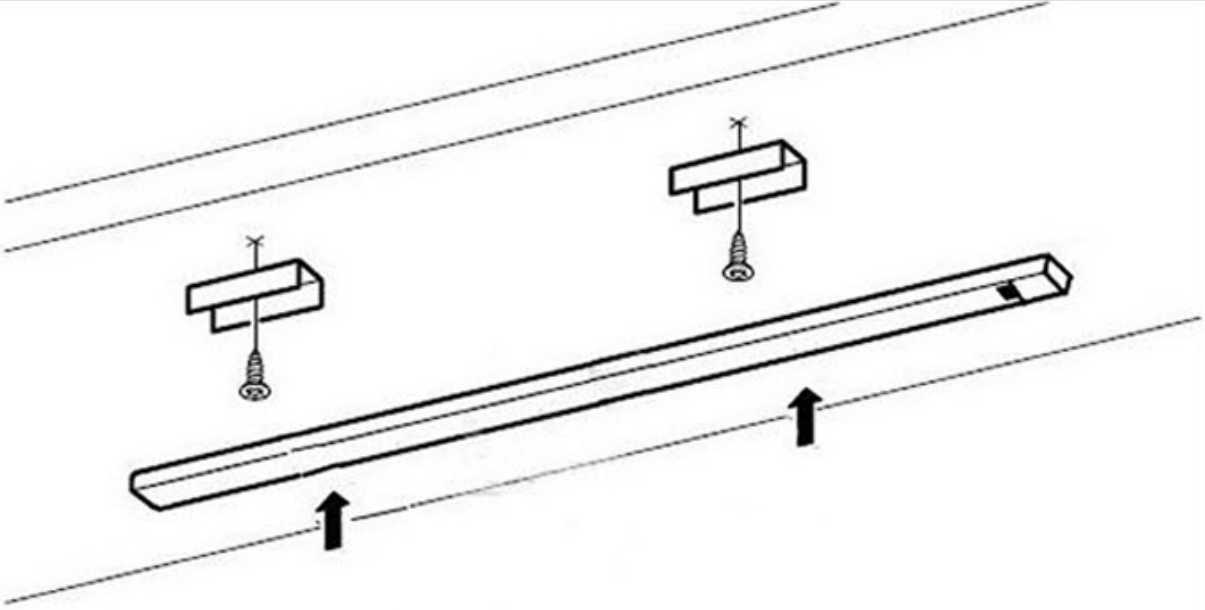

Push and snap in

③

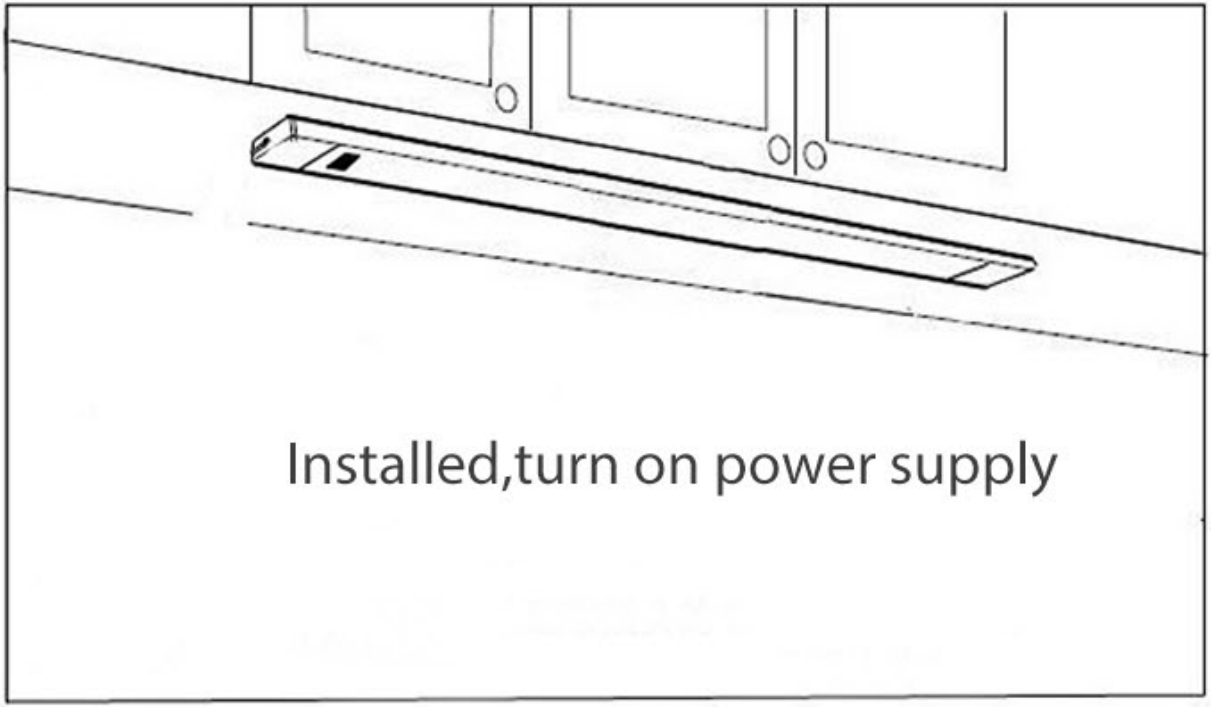

Installed,turn on power supply