

Radius Glo

Product Parts

- 1 - Base
- 2 - Curved Corner (x4)
- 3 - Side Pieces (x4)
- 4 - Side Link Bar (x2)
- 5 - Top Piece
- 6 - Middle Support Bar
- 7 - 5mm Torx Wrench
- 8 - 3mm Hex Wrench
- 9 - 2mm Hex Wrench
- 10 - Open End Wrench
- 11 - Graphic (x2)
- 12 - Power Cord



Display Set-Up

Step 1

Using the matching numbers, find the two Curved Corners (2) that will be connected to the Base (1). The screws and washers already in these pieces will be put back the same way for assembly. Remove them from the Curved Corners using the Open End Wrench (10) and 3mm Hex Wrench (8). Attach the Corners to the Base, curving upwards. Replace the screw, fastener and washers to secure it. Repeat this step for the 2nd Curved Corner on the other side of the Base.



Step 2

The Side Pieces (3) also have numbers to assist with assembly. Lower the pieces onto the Curved Corners (2) that have matching numbers and replace the screw, fastener and washers to secure them.



Step 3

Insert the Side Link Bars (4) into the fitting slots on the Side Pieces (3). Using the 5mm Torx Wrench, loosen the bar's screws to let it slide up or down. Tighten the screws when the bars protrude halfway out of the top ends of the installed Sides as shown: Lower the remaining Side Pieces onto the bars, again matching numbers on the parts. Tighten the bar's upper screw to secure the pieces.

Step 4

Using the Open End Wrench (10) and 3mm Hex Wrench (8), remove the screws, washers and fasteners from each remaining Curved Corner (2). Insert the Corners into the Top Piece (5) where the numbers match. Replace the screws, washers and fasteners to secure the Corners to the Top. Lower the Top/Corners onto the Side Pieces (3) and replace the screws, etc.

Step 6

Find the frame's power connections. There are two kinds on the display: simple push clips and 6-pin connectors.



6-pin connector must be inserted a specific way



Push Clips


Step 7

Attach the Power Cord (12) to the Side Piece (3) that has a cord coming out. For ease of use, a power strip or surge protector is recommended (not included).



Step 5

Using the 3mm Hex Wrench (8), remove the screws and washers from the small holder piece inside the top side pieces. Use these screws to attach the Middle Support Bar (6) to the holders on each side. If the holder needs to move up or down, use the 2mm Hex Wrench (9) to loosen or tighten the headless bolt inside it.

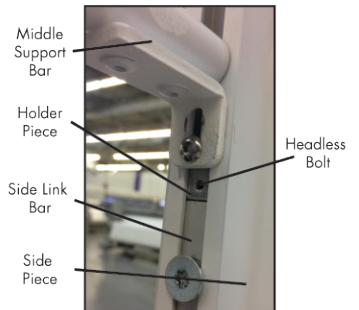

Step 8

Insert the Graphic's (11) gasket into the frame's grooves, starting with the corners. To remove them, pull the loop found on the corner.



Storage

Store in a cool dry location.

Care

To clean the frame, remove it from the power source and wipe with a damp cloth. Do not wash or dry clean the graphic.