

3 BUTTON AC WALL SWITCH

SPECIFICATIONS

Input Voltage: AC120-277V
 Frequency: 50/60Hz
 Input Current: 10mA Max

Bluetooth Transmit: 100ft Max
 Radio Frequency: 2.4GHz ± 75MHz
 Bluetooth Version: 5.0
 Housing Material: UL 94-5VA
 Indoor Use Only

Operating Temperature: 0°C to 40°C,
 32°F to 104°F
 Storage Temperature: -30°C to 85°C,
 -22°F to 185°F

IP Rating: IP20
 Color: Plate/White, Housing/Black
 Warranty: Limited Lifetime



Comply to UL60730, UL1376, RoHS
 Safety: cULus Listed E347437
 Appliance Control
 FCC ID: 2A26YLTKTVT2022
 DID: D061367
 DLC: NLTRC5KL0TN



FEATURES

The SMRT-3B-WIRED-WH-BT is a simplified On/OFF wall switch with the ability to raise and lower the light level as well. It is 120V / 277V and must be mounted in a Junction Box. Neutral wire is required. Blue LED indicators show the status of the switch. It is network enabled, and can be configured via our SMRT Bluetooth technology.

DIMENSIONS / WIRING / DETAILS

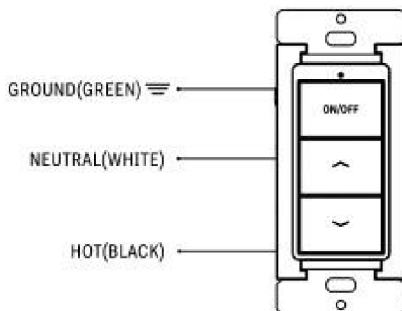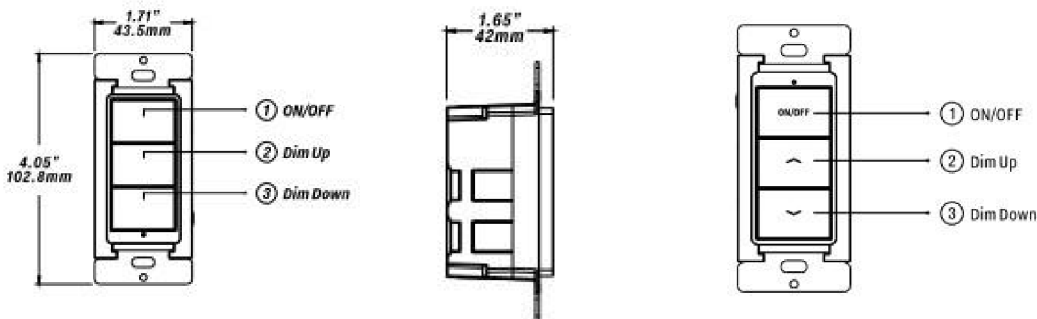

- Wire Strip Length; 16 mm (5/8 in.)
- The device shall install in a standard outlet box.

1. Remove wall plate, switch mounting screws.
2. Carefully remove the switch from the switch box. DO NOT disconnect the wires.
3. There are three wiring connections on the switch, these are marked HOT, NEUTRAL, GROUND.
4. Disconnect the wires from the existing switch
5. Connect the green wire to the GROUND terminal.
6. Connect the white wire to the terminal marked NEUTRAL.
7. Connect the black wire to the terminal marked HOT.
8. Check connections to be sure they are tight and no bare conductors are exposed.
9. Insert the switch into the outlet box carefully.
10. Make sure the switch to the box using the supplied screws.
11. Attach the wall plate.
12. Restore power to the circuit breaker and test the system.

Connecting Bluetooth Wall Switch to Lights:

- 1) Press button 1 and 2 together and hold 3 seconds to enter pairing mode and to achieve reset function. The switch can now be scanned in the next 30 seconds.
- 2) In the SMRT App, on the "Switch" page, click to add the switch.
- 3) Select the light/light group to be controlled by this switch.
- 4) For more detailed operation, please refer to the SMRT App instruction guide.