

SCP PART#: 18/2FPLP

Rev06/23

Description:


2C/18AWG SOLID FPLP PLENUM- RED- 1000 FT SPOOL

Regulatory

UL STANDARD 444 & UL 13 & UL 1424, FPLP OR CL2P/CL3P
 OR (UL) c(UL) CMP FT6

Application

Fire Alarm Cable

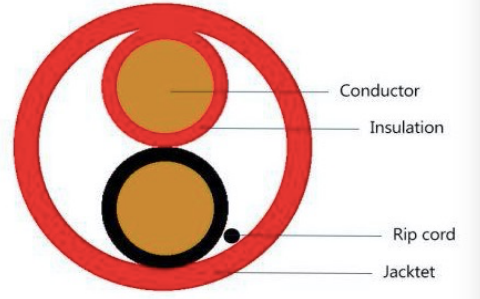

Construction Characteristics:

Conductor	Material	Solid Bare Copper
	Size	18AWG*2C
	Construction	1.02+/-0.005mm
Insulation	Material	FRPVC
	Min. Thickness	>=0.20mm
	AVG. Thickness	>=0.24mm
	Diameter	1.42+/-0.10mm
Jacket	Colors	Red,Black
	Material	FRPVC
	Min. Thickness	>=0.33mm
	AVG. Thickness	>=0.38mm
	Diameter	4.16 +/-0.20mm
	Rip Cord	Yes
	Color	Red

Electrical & Physical Characteristics

Operating Temperature Range		-20°C ~ +75°C
Voltage Rating		300 Volt RMS
DCR Conductor		<=6.649 Ohms/1000 FT. at 25°C
Capacitance(Cond-Cond)		62.6 pF/ft(Nominal)@ 1kHz
Insulation voltage		Vrms (Maximum) 1.5K
Insulation	Tensile Strength	>=10.3Mpa
	Elongation	>=100%
Jacket	Tensile Strength	>=10.3Mpa
	Elongation	>=100%

Markings

STRUCTURED CABLE PRODUCTS INC --- P/N 18/2FPLP --- PLENUM FIRE ALARM CABLE --- 2C/18 AWG SOL BC UNSHIELDED (UL) FPLP
 E324624-SCP7 OR CL2P/CL3P OR (UL) c(UL) CMP FT6 75C LS-PVC JKT --- ROHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 XXX FT LOT
 # 0502160

Packaging

Approx Weight	Approx Dimension (Spool)	Package	Spools per pallet	Pallet weight
9.9kg/spool	25x13.5x25cm	1000ft/spool	48 spools	475.2kg